



MODELS: P33-NG4 Natural Gas P33-LP4 Propane

WARNING:

If the information in these instructions are not followed exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

FOR YOUR SAFETY

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

Installation and service must be performed by a qualified installer, service agency or the gas supplier.

FOR YOUR SAFETY

What to do if you smell gas:

- Do not try to light any appliance
- Do not touch any electrical switch: do not use any phone in your building.
- Immediately call your gas supplier from a neighbour's phone. Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the fire department.




Installer: Please complete the details on the back cover and leave this manual with the homeowner.

Homeowner: Please keep these instructions for future reference.

To the New Owner:

Congratulations!

You are the owner of a state-of-the-art Gas Fireplace by FPI FIREPLACE PRODUCTS INTERNATIONAL LTD. The P33-4 has been designed to provide you with all the warmth and charm of a wood fireplace at the flick of a switch. The P33-4 has been approved by Warnock Hersey/Intertek for both safety and efficiency. As it also bears our own mark, it promises to provide you with economy, comfort and security for many trouble free years to follow. Please take a moment now to acquaint yourself with these instructions and the many features of your Regency® Fireplace.

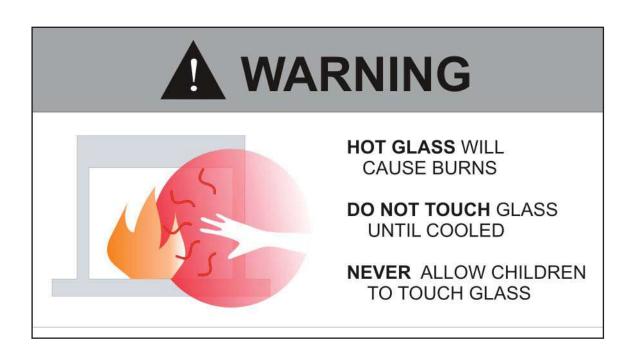





INFORMATION FOR MOBILE/MANUFACTURED HOMES AFTER FIRST SALE

This Regency® product has been tested and listed by Warnock Hersey/Intertek as a Direct Vent Wall Furnace to the following standards: VENTED GAS FIREPLACE HEATERS ANSI Z21.88-2002/CSA 2.33-2002 and GAS-FIRED APPLIANCES FOR USE AT HIGH ALTITUDES CAN/CGA-2.17-M91.

This Direct Vent System Appliance must be installed in accordance with the manufacturer's installation instructions and the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280, or the current Standard of Fire Safety Criteria for Manufactured Home Installations, Sites, and Communities ANSI/NFPA 501A, and with CAN/CSA Z240-MH Mobile Home Standard in Canada.

This appliance installation must comply with the manufacturer's installation instructions and local codes, if any. In the absence of local codes follow the current National Fuel Gas Code, ANSI Z223.1 and the current National Electrical Code ANSI/NFPA 70 in the U.S.A., and the current CAN/CGA B149 Gas Installation Code and the current Canadian Electrical Code CSA C22.1 in Canada.

The appliance, when installed, must be electrically grounded in accordance with local codes or, in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70, or the Canadian Electrical Code, CSA C22.1.

Ensure that structural members are not cut or weakened during installation.

This Regency[®] Mobile/Manufactured Home Listed appliance comes factory equipped with a means to secure the unit.

This Regency® Mobile/Manufactured Home listed appliance comes equipped with a dedicated #8 ground lug to which an 18 gauge copper wire from the steel chassis ground must be attached.

This appliance may be installed in an aftermarket permanently located, manufactured (mobile) home, where not prohibited by local codes.

This appliance is only use with the type of gas indicated on the rating plate. This appliance is not convertible for use with other gases, unless a certified kit is used.

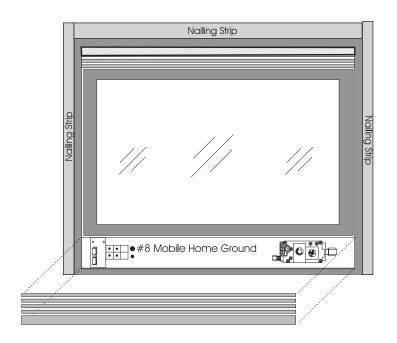


TABLE OF CONTENTS

| SAFETY LABEL | | Optional Bay Door | |
|---|-----|--|----|
| | | Optional Bay Trim | |
| | | Bay Louvers | |
| Safety Label | 5 | Full Screen doors | |
| | | Contemporary faceplate installation part 1 | |
| REQUIREMENTS | | Contemporary faceplate installation part 2 | |
| I/L@OII/LWILWIO | | Contemporary faceplate installation part 3 | |
| | | Optional Remote Control | |
| Important Message | | Optional Wall Thermostat | |
| Before You Start | | Optional Wall Switch | |
| General Safety Information | | Wiring Diagrams | |
| Requirements | 7 | Installing the Optional Fan | |
| | | Copy of the Lighting Plate Instructions | 51 |
| INSTALLATION | | | |
| | | OPERATING INSTRUCTIONS | |
| Installation Checklist | 0 | or Envirance into into original | |
| | | On another to atmost and | |
| Locating your fireplace | | Operating Instructions | |
| Duct System Option | | Lighting Procedure | |
| Unit Dimensions | | Shutdown Procedure | |
| Unit Dimensions with contemporary faceplate | | First Fire | |
| Clearances for bay or flush front | | Aeration Adjustment | |
| Clearances with contemporary faceplate | | Normal Operating Sounds of Gas Appliances | 53 |
| Combustible Mantels | | | |
| Mantel Leg Clearances with Flush or bay glass | | MAINTENANCE | |
| Mantel Leg Clearances with contemporary Faceplate | | | |
| Framing and Finishing | | Maintenance Instructions | 53 |
| Framing Dimensions with contemporary faceplate | | General Vent Maintenance | |
| Framing & Finishing with contemporary faceplate | | Gold-Plated Louvers/trim | |
| Unit Assembly Prior to Installation | | Log Replacement | |
| Venting Introduction | | | |
| Exterior Vent Termination Locations | | Thermopile/ThermocoupleGlass Gasket | |
| Regency® Direct Vent flex System | | | |
| Installation Procedures | | Door Glass | |
| Rigid Pipe Venting Systems | .20 | Removing Valve | |
| 4" x 6-5/8" Rigid Pipe Cross Reference Chart | .21 | Installing Valve | 55 |
| Rigid Pipe Venting Arrangements | .23 | | |
| Vertical Termination | | PARTS LIST | |
| with Co-Linear Flex System | 29 | | |
| Venting Arrangements - Vertical Terminations | 30 | | |
| Unit installation with Horizontal termination | 31 | Main Assembly | 56 |
| Unit installation with Vertical Termination | 32 | Burner & Log Assembly | |
| Gas Line Installation | 32 | Flush Front & Louvers | |
| Pilot Adjustment | 33 | Contemporary faceplate | |
| High Elevation | 33 | Contomporary recopiate | 00 |
| Gas Pipe Pressure Testing | | | |
| S.I.T. Valve Description | | | |
| Conversion from NG to LP | | | |
| Optional Brick Panels | | WARRANTY | |
| Log Set Installation | | | |
| Standard Flush Door | | Warranty | 63 |
| Optional Flush Trim | | - | |
| Flush Louvers | | | |
| Double Screen Door | | | |
| | | | |

SAFETY LABEL

This is a copy of the label that accompanies each P33-4 Zero Clearance Direct Vent Gas Fireplace. We have printed a copy of the contents here for your review. The safety label is located on the front inside base of the unit, visible when the bottom louver is open.

NOTE: Regency® units are constantly being improved. Check the label on the unit and if there is a difference, the label on the unit is the correct one.

PI Fireplace Products International Ltd. Delta, BC, Canada Made in Canada/ O" Clearance to combustibles from:
Top, sides, bottom and rear of unit Clearance to finished floor from Base: C) Min 1" (26mm) The "Bay Louvers" <u>MUST</u> be used with the Bay Glass option Side Wall Clearance from Side Facing with Flush or Bay Front B) 7.5"(191mm) DO NOT REMOVE THIS LABEL / NE PAS ENLEVER CETTE ÉTIQUETTE Mantel Clearances from Top: (A) Min. 7" (177mm) Alcove Clearances for Bay & Flush Louvers:
Max. Depth 36" (914mm)
Min. Width 48" (1219mm),
Min. Height 59" (1499mm) w/Faceplate Min 0" (0mm) All Other Applications Serial No./ No de serie Minimum Clearances to Combustibles
Degagement Minimum De Materiaux Combustibles PI Fireplace Wall o-(See Instruction Manual for Detailed Instructions) 305 305 Minimum clearance of Vent Terminal to Outside Corner Inside Corner: 6"/150mm Horizontal Terminations rethe use of the **AstroCap**¹³ (Part # 946-523) 60Hz. N S supply 115VAC, Duplicate Wall FONCTIONNANT AU NATURAL GAS Pression a la tubulure d'échappement élevée Pression a la tubulure d'échappement basse ession a la tubulure d'échappement élevée ession a la tubulure d'échappement basse APPAREIL FONCTIONNANT AU PROPAN CONCU POUR ETRE POELE: Modéle P33 Grandeur de l'injecteur Débit Caliorfique maximum selon Débit Califorique minimum selon liorfique maximum selon Débit Caliorfique minimum selon Débit Califorique maximum selon Grandeur de l'injecteur l'altitude Débit Califorique minimum selon Débit Caliorfique maximum selon Débit Califorique minimum selon Débit Caliorfique maximum selon deur de l'injecteur eur de l'injecteu MAY BE INSTALLED IN MANUFACTURED (MOBILE) HOMES AFTER FIRST SALE Certified for/Certifiée pour: CANADA and U.S.A. rested to: CAN/CGA-2.17-M91, ANSI Z21.88a-2007/CSA 2.33a-2007. -isted: VENTED GAS FIREPLACE HEATER 15,500 Btu for Altitude 0- 4500ft/pi 10,500 Btu/h (3.07 kW) 21,000 Btu/h (6.15 kW) # 45 DMS 2000-4500 ft/pi (610-1372m) (4.54 kW) (2.64 kW) Btu/h (3.66 kW) Btu/h (6.59 kW) ft/pi(0-610 m) (5.13 kW) (2.87 kW) (3.07 kW) (6.30 kW) WC(1.25 kPa) WC(0.95 kPa) WC(0.27 kPa) WC(2.99 kPa) WC(2.74 kPa) WC(0.82 kPa) ft/pi (0-1372 m) DMS Btu/h Btu/h # 56 15,500 9,000 3.3" # 54 10,500 21,500 0.4500 # 47 17,500 9,800 Model P33-LP4 convertible to NATURAL GAS: Model R Minimum supply pressure Manifold pressure high Manifold pressure low PROPANE: Model P33-L WN# 16113 Minimum supply pressure Manifold pressure high Manifold pressure low teria for Maximum input Maximum input Maximum input Minimum input Maximum input **Jaximum** input Minimum input Minimum input linimum inpu Orifice size Orifice size Orifice size Orifice size Altitude Model/Modele

For the State of Massachusetts, installation and repair must be done by a plumber or gasfitter licensed in the Commonwealth of Massachusetts.

For the State of Massachusetts, flexible connectors shall not exceed 36 inches in lenath.

For the State of Massachusetts, the appliances individual manual shut-off must be a t-handle type valve.

The State of Massachusetts requires the installation of a carbon monoxide alarm in accordance with NFPA 720 and a CO alarm with battery back up in the same room where the gas appliance is installed.

Ontion

MA Code - CO Detector

(for the State of Massachusetts only)

5.08: Modifications to NFPA-54, Chapter 10

- (2) Revise 10.8.3 by adding the following additional requirements:
- (a) For all side wall horizontally vented gas fueled equipment installed in every dwelling, building or structure used in whole or in part for residential purposes, including those owned or operated by the Commonwealth and where the side wall exhaust vent termination is less than seven (7) feet above finished grade in the area of the venting, including but not limited to decks and porches, the following requirements shall be satisfied:
- 1. INSTALLATION OF CARBON MONOXIDE DETECTORS. At the time of installation of the side wall horizontal vented gas fueled equipment, the installing plumber or gasfitter shall observe that a hard wired carbon monoxide detector with an alarm and battery back-up is installed on the floor level where the gas equipment is to be installed. In addition, the installing plumber or gasfitter shall observe that a battery operated or hard wired carbon monoxide detector with an alarm is installed on each additional level of the dwelling, building or structure served by the side wall horizontal vented gas fueled equipment. It shall be the responsibility of the property owner to secure the services of qualified licensed professionals for the installation of hard wired carbon monoxide detectors
- a. In the event that the side wall horizontally vented gas fueled equipment is installed in a crawl space or an attic, the hard wired carbon monoxide detector with alarm and battery back-up may be installed on the next adjacent floor level.
- b. In the event that the requirements of this subdivision can not be met at the time of completion of installation, the owner shall have a period of thirty (30) days to comply with the above requirements; provided, however, that during said thirty (30) day period, a battery operated carbon monoxide detector with an alarm shall be installed.
- 2. APPROVED CARBON MONOXIDE DETECTORS. Each carbon monoxide detector as required in accordance with the above provisions shall comply with NFPA 720 and be ANSI/UL 2034 listed and IAS certified.
- 3. SIGNAGE. A metal or plastic identification plate shall be permanently mounted to the exterior of the building at a minimum height of eight (8) feet above grade directly in line with the exhaust vent terminal for the horizontally vented gas fueled heating appliance or equipment. The sign shall read, in print size no less than one-half (1/2) inch in size, "GAS VENT DIRECTLY BELOW. KEEP CLEAR OF ALL OBSTRUCTIONS".
- 4. INSPECTION. The state or local gas inspector of the side wall horizontally vented gas fueled equipment shall not approve the installation unless, upon inspection, the inspector observes carbon monoxide detectors and signage installed in accordance with the provisions of 248 CMR 5.08(2)(a)1 through 4.
- (b) EXEMPTIONS: The following equipment is exempt from 248 CMR 5.08(2)(a)1 through 4:
- 1. The equipment listed in Chapter 10 entitled "Equipment Not Required To Be Vented" in the most current edition of NFPA 54 as adopted by the Board: and
- 2. Product Approved side wall horizontally vented gas fueled equipment installed in a room or structure separate from the dwelling, building or structure used in whole or in part for residential purposes.
- (c) MANUFACTURER REQUIREMENTS GAS EQUIPMENT VENTING SYSTEM PROVIDED. When the manufacturer of Product Approved side wall horizontally vented gas equipment provides a venting system design or venting system components with the equipment, the instructions provided by the manufacturer for installation of the equipment and the venting system shall include:
- 1. Detailed instructions for the installation of the venting system design or the venting system components; and
- 2. A complete parts list for the venting system design or venting system.
- (d) MANUFACTURER REQUIREMENTS GAS EQUIPMENT VENTING SYSTEM NOT PROVIDED. When the manufacturer of a Product Approved side wall horizontally vented gas fueled equipment does not provide the parts for venting the flue gases, but identifies "special venting systems", the following requirements shall be satisfied by the manufacturer:
- 1. The referenced "special venting system" instructions shall be included with the appliance or equipment installation instructions; and
- 2. The "special venting systems" shall be Product Approved by the Board, and the instructions for that system shall include a parts list and detailed installation instructions.
- (e) A copy of all installation instructions for all Product Approved side wall horizontally vented gas fueled equipment, all venting instructions, all parts lists for venting instructions, and/or all venting design instructions shall remain with the appliance or equipment at the completion of the installation.

INSTALLATION

IMPORTANT MESSAGE SAVE THESE INSTRUCTIONS

The P33-NG4 or P33-LP4 Direct Vent Fireplace must be installed in accordance with these instructions. Carefully read all the instructions in this manual first. Consult the "authority having jurisdiction" to determine the need for a permit prior to starting the installation. It is the responsibility of the installer to ensure this fireplace is installed in compliance with manufacturer's instructions and all applicable codes.

BEFORE YOU START

Safe installation and operation of this appliance requires common sense, however, we are required by the Canadian Safety Standards and ANSI Standards to make you aware of the following:

INSTALLATION AND REPAIR SHOULD BE DONE BY AN AUTHORIZED SERVICE PERSON. THE APPLIANCE SHOULD BE INSPECTED BEFORE USE AND AT LEAST ANNUALLY BY A PROFESSIONAL SERVICE PERSON. MORE FREQUENT CLEANING MAY BE REQUIRED DUE TO EXCESSIVE LINT FROM CARPETING, BEDDING MATERIAL, ETC. IT IS IMPERATIVE THAT CONTROL COMPARTMENTS, BURNERS AND CIRCULATING AIR PASSAGEWAYS OF THE APPLIANCE BE KEPT CLEAN.

DUE TO HIGH TEMPERATURES, THE APPLIANCE SHOULD BE LOCATED OUT OF TRAFFIC AND AWAY FROM FURNITURE AND DRAPERIES.

WARNING: FAILURE TO INSTALL THIS APPLIANCE CORRECTLY WILL VOID YOUR WARRANTY AND MAY CAUSE A SERIOUS HOUSE FIRE.

CHILDREN AND ADULTS SHOULD BE ALERTED TO THE HAZARDS OF HIGH SURFACE TEMPERATURES, ESPECIALLY THE FIREPLACE GLASS, AND SHOULD STAY AWAY TO AVOID BURNS OR CLOTHING IGNITION.

YOUNG CHILDREN SHOULD BE CARE-FULLY SUPERVISED WHEN THEY ARE IN THE SAME AREA AS THE APPLI-ANCE. TODDLERS, YOUNG CHILDREN AND OTHERS MAY BE SUSCEPTIBLE TO ACCIDENTAL CONTACT BURNS. A PHYSICAL BARRIERS IS RECOMMEND-ED IF THERE ARE AT RISK INDIVIDUAL INTHE HOUSE. TO RESTRICT ACCESS TO A FIREPLACE OR STOVE, INSTALL AN ADJUSTABLE SAFETY GATE TO KEEP TODDLERS, YOUNG CHILDREN AND OTHER AT RISK INDIVIDUALS OUT OF THE ROOM AND AWAY FROM HOT SURFACES.

CLOTHING OR OTHER FLAMMABLE MATERIAL SHOULD NOT BE PLACED ON OR NEAR THE APPLIANCE.

GENERAL SAFETY INFORMATION

- The appliance installation must conform with local codes or, in the absence of local codes, with the current Canadian or National Gas Codes, CAN1-B149 or ANSI Z223.1 Installation Codes.
- 2) The appliance when installed, must be electrically grounded in accordance with local codes, or in the absence of local codes with the current National Electrical Code, ANSI/NFPA70 or CSA C22.1 Canadian Electrical Code.
- See general construction and assembly instructions. The appliance and vent should be enclosed.
- 4) This appliance must be connected to the specified vent and termination cap to the outside of the building envelope. Never vent to another room or inside a building. Make sure that the vent is fitted as per Venting instructions.
- 5) Inspect the venting system annually for blockage and any signs of deterioration.
- Venting terminals shall not be recessed into a wall or 2) siding.

- 7) Any safety glass removed for servicing must be replaced prior to operating the appliance.
- 8) To prevent injury, do not allow anyone who is unfamiliar with the operation to use the fireplace.
- Wear gloves and safety glasses for protection while doing required maintenance.
- **10)** Be aware of electrical wiring locations in walls and ceilings when cutting holes for termination.
- 11) Under no circumstances should this appliance be modified. Parts that have to be removed for servicing should be replaced prior to operating this appliance.
- 12) Installation and any repairs to this appliance should be done by a qualified service person. A professional service person should be called to inspect this appliance annually. Make it a practice to have all of your gas appliances checked annually.
- 13) Do not slam shut or strike the glass door.
- **14)** Under no circumstances should any solid fuels (wood, paper, cardboard, coal, etc.) be used in this appliance.
- 15) The appliance area must be kept clear and free of combustible materials, (gases and other flammable vapours and liquids).

Emissions from burning wood or gas could contain chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

MANUFACTURED MOBILE HOME ADDITIONAL REQUIREMENTS

- Ensure that structural members are not cut or weakened during installation.
- Ensure proper grounding using the #8 ground lug provided. Refer to "Wiring Diagram" Section.



INSTALLATION CHECKLIST

- 1) Locate appliance
 - a) Room location (Refer to "Locating Your Fireplace" Section)
 - b) Clearances to Combustibles (Refer to "Clearances" Section)
 - Mantle Clearances (Refer to "Combustible Mantels" Section)
 - Framing & Finishing Requirements (Refer to "Framing & Finishing" Section)
 - e) Venting Requirements (Refer to "Venting" Sections)
- Assemble Top Facing Support and Side Nailing Strips (Refer to "Unit Assembly Prior to Installation" Section). NOTE: Must be done before installing unit into fireplace.
- 3) Install vent (Refer to "Venting" Sections)
- Make gas and electrical connections. Test the pilot. Must be as per diagram. (Refer to "Gas Line Installation" and "Pilot Adjustment" Section).

Convert to Propane if desired. (Refer to "Conversion Kit from NG to LPG" Section).

- 5) Install standard and optional features. Refer to the following sections:
 - a. Optional Brick Panels
 - b. Log Set Installation
 - c. Standard Flush Door
 - d. Optional Flush Trime. Double Screen Door
 - f. Optional Bay Door
 - g. Optional Bay Trim
 - h. Flush Louvers
 - i. Bay Louvers
 - i. Full Screen Doors
 - k. Optional Contemporary Faceplate
 - I. Optional Wall Themostat
 - m. Optional Remote Control
 - n. Optional Wall Switch
 - o. Installing the Optional Fan
- 6) Final check.

Before leaving this unit with the customer, the installer must ensure that the appliance is firing correctly and **operation fully explained to customer**.

This includes:

- Clocking the appliance to ensure the correct firing rate (rate noted on label) after burning appliance for 15 minutes.
- 2) If required, adjusting the primary air to ensure that the flame does not carbon. First allow the unit to burn for 15-20 min. to stabilize.

CAUTION: Any alteration to the product that causes sooting or carboning that results in damage is not the responsibility of the manufacturer.


LOCATING YOUR FIREPLACE

- When selecting a location for your fireplace, ensure that the clearances outlined on this page are met.
- 2) Provide adequate clearances for servicing.
- 3) The appliance must be installed on a flat, solid, continuous surface (e.g. wood, metal, concrete). This may be the floor, or raised up on a platform to enhance its visual impact. If the appliance is going to be installed on carpeting, combustible linoleum tile or other combustible material other than wood flooring, the appliance must be installed on a metal or wood panel extending the full width and depth of the appliance.
- 4) The P33-4 can be installed in a recessed position or framed out into the room as in A, B, C, D. See Diagram 1 below.
- 5) This appliance is Listed for bedroom installations when used with a Listed Millivolt Thermostat. Some areas may have further requirements, check local codes before installation.
- 6) The P33-4 Direct Vent Gas Fireplace is approved for alcove installations, which meet the clearances listed on the "Clearances" Section.
- 7) We recommend that you plan your installation on paper using exact measurements for clearances and floor protection before actually installing this appliance. Have a qualified inspector, dealer, or installer review your plans before installation.

Note: For vent terminations see "Exterior Vent Termination Locations" Section.

- A) Flat on Wall
- B) Flat on Wall Corner
 - Recessed into Wall/Alcove
- D) Corner

C)






DUCT SYSTEM OPTION Kit #946-556


The *HeatWave* Air Duct Kit increases the effectiveness of your fireplace by dispersing warm air from the fireplace to remote locations in the same room or other rooms in your home.


Up to two kits may be installed on the fireplace. **Please Note:** Only 1 HeatWave kit may be operated at one time. This includes the internal blower option as well.


UNIT DIMENSIONS

UNIT DIMENSIONS WITH CONTEMPORARY FACEPLATE







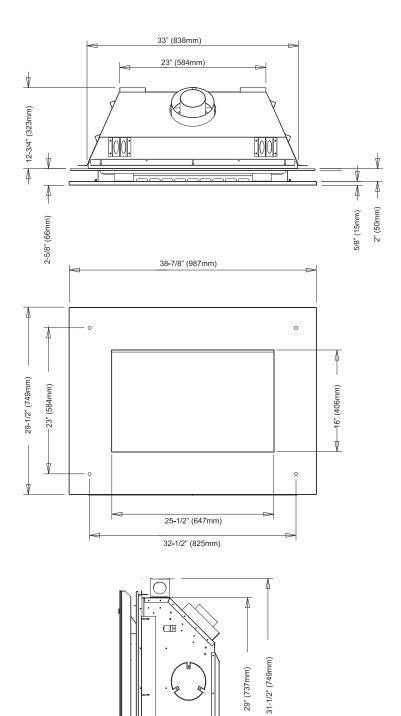

CLEARANCES FOR BAY OR FLUSH FRONT

The clearances listed below are Minimum distances unless otherwise stated:

A major cause of chimney related fires is failure to maintain

required clearances (air space) to combustible materials.

It is of the greatest importance that this fireplace and vent system

be installed only in accordance with these instructions.

Clearance to Combustibles from:

| Back | 0" | (0mm) |
|-------|----|-------|
| Side | 0" | (0mm) |
| Floor | 0" | (Omm) |

NOTE: The minimum floor clearance must be maintained

from the top surface of the carpeting, tile, etc.

Minimum Clearance from Top of Unit to:

Mantel* min. 7" (177mm)

Ceiling 30" (762mm)

from top of unit.

Side Wall Clearance

Bay or Flush Front 7-1/2" (191mm)

Minimum Vent Clearances:

2-1/2" (64mm) Horizontal Top 1-1/2" (38mm) Horizontal Side

1-1/2" (38mm) Horizontal Bottom


1-1/4" (32mm) Vertical Vent Clearance (Rigid Vent)

1-1/2" (38mm) Vertical Vent Clearance (Flex Vent)

Alcove Clearances:

| Max. Depth | 36" | (914mm) |
|-------------|-----|----------|
| Min. Width | 48" | (1219mm) |
| Min. Height | 59" | (1499mm) |

^{*} see mantel clearance instructions.



Clearances for Bay or Flush Front

Warning

Fire hazard is an extreme risk if these clearances are not adhered to.

CLEARANCES WITH CONTEMPORARY FACEPLATE

The clearances listed below are Minimum distances unless otherwise stated:

A major cause of chimney related fires is failure to maintain required clearances (air space) to combustible materials. It is of the greatest importance that this fireplace and vent system be installed only in accordance with these instructions.

Caution Requirements


The top, back and sides of the fireplace are defined by standoffs. The metal ends of the standoff may **NOT** be recessed into combustible construction.

D Close to Floor

WARNING

Fire hazard is an extreme risk

if these clearances (air space) to combustible materials are not adhered to. It is of greatest importance that this fireplace and vent system be installed only in accordance with these instructions.



*Note: All measurements are from the top/side of the unit, not optional front.

| Clearance: | Dimension | Measured From: |
|-------------------------------------|----------------|--------------------------------|
| A: *Front Floor Clearance (min.) | 1" (25mm) | Underside of Unit |
| B: *Sidewall | 7-1/2" (241mm) | Side of Unit |
| C: *Ceiling (room and/or alcove) | 30" (889mm) | Top of Unit |
| D: Alcove Width | 48" (1219mm) | Sidewall to Sidewall (Minimum) |
| E: Alcove Depth | 36" (914mm) | Front to Back Wall (Maximum) |

| Flue Clearances to Combustibles | | | | | | |
|------------------------------------|--------|--|--|--|--|--|
| Horizontal - Top | 2-1/2" | | | | | |
| Horizontal - Side | 1-1/2" | | | | | |
| Horizontal - Bottom | 1-1/2" | | | | | |
| Vertical (Flex Vent) | 1-1/2" | | | | | |
| Vertical (Rigid) | 1-1/4" | | | | | |

COMBUSTIBLE MANTELS


Because of the extreme heat this fireplace emits, the mantel clearances are critical. Combustible mantel clearances from top of unit are shown in the diagram below.

Note: A non-combustible mantel may be installed at a lower height if the framing is made of metal studs covered with a non-combustible board. This drawing is to scale at 1:6 (one inch = 6 inches). Mantel can be installed anywhere in shaded area or higher using the above scale.

Note: Ensure the paint that is used on the mantel and the facing is "heat resistant" or the paint may discolour.


Combustible mantel leg clearances as per diagrams below:

Mantel Clearances with Flush, Full Screens or Bay Glass 0 12 10 Drywall 12" (305mm) 12 10 7-1/2"(191mm) 0" - 3-1/2" (89mm) 8 11"(279mm) 9"(229mm) 7"(178mm) 2 Top of 29"(737mm) Unit to floor Side View

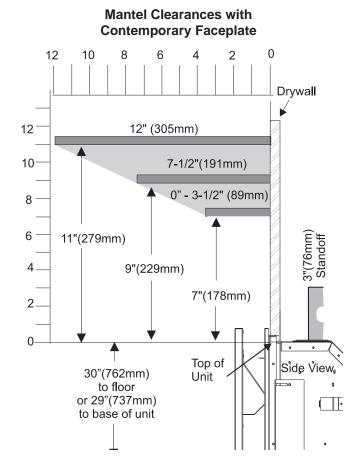


MANTEL LEG CLEARANCES WITH FLUSH OR BAY GLASS

Combustible mantel leg clearances from side of unit as per diagram:

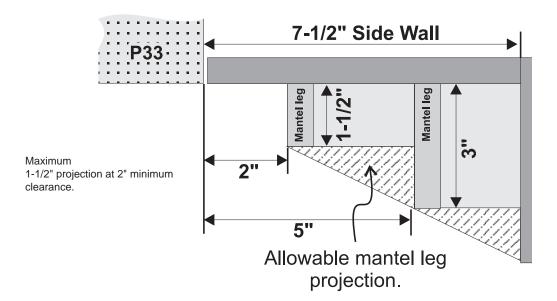

MANTEL LEG CLEARANCES WITH CONTEMPORARY FACEPLATE


Combustible mantel leg clearances from side of unit as per diagram:

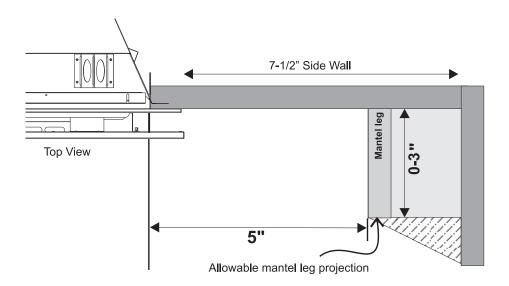


FRAMING AND FINISHING

 Determine the total thickness of facing material (e.g. drywall plus ceramic tiles) to allow the finished surface to be flush with the front of the unit. Total facing thickness can vary from 1/2" (13mm) to 1-1/4" (32mm) thick.

Install Side Nailing Strips, and Top Facing Support before unit is slipped into position. See "Unit Assembly Prior to Installation" Section




2) Frame in the enclosure for the unit with framing material.

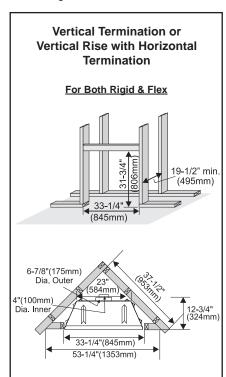

NOTE: If this is an outside corner, the minimum distance between the vent and the outside corner is 6" (15cm) with AstroCap termination cap or 12" (30cm) with Rigid Vent termination cap. (For example Dura-Vent).

NOTE: Framing is different when using the faceplate option.


See framing section when using faceplate in this manual.



NOTE: If this is an outside corner, the minimum distance between the vent and the outside corner is 6" (15cm) with AstroCap termination cap or 12" (30cm) with Rigid Vent termination cap. (For Example Dura-Vent).

- For exterior walls, insulate the enclosure to the same degree as the rest of the house, apply vapour barrier and drywall, as per local installation codes. (Do not insulate the fireplace itself.)
- 4) The top of the unit must not be closer than 30" (762mm) to the ceiling.
- 5) Combustible material may be brought up to the top and sides of the unit and be covered with ceramic tiles, bricks, rock or other suitable combustible finishing materials.

Note: The unit does not have to be completely enclosed in a chase. The clearance on top of the unit is 0" to the standoffs so combustible building materials can be laid directly on top of the standoffs. You must maintain clearance from the vent to combustible materials for flex or for Rigid Vent (Refer to "Clearances" Section).

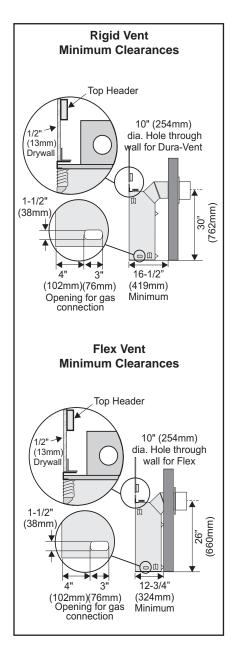


6) Use steel studs for framing where the 1-1/2" (38mm) clearance from the vent to combustible material cannot be maintained.

Heat Wave

The *HeatWave* Duct Kit has different clearance and framing requirements, check the *HeatWave* manual for details.

FRAMING DIMENSIONS WITH CONTEMPORARY FACEPLATE

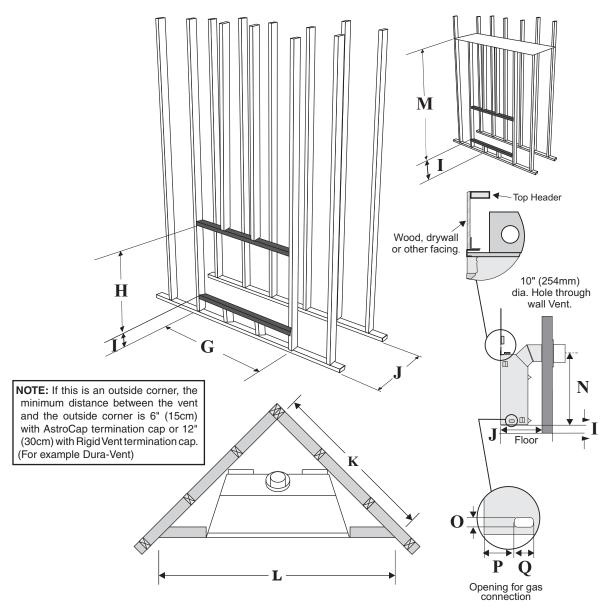

| Framing Dimensions | Description | P33-4 | | |
|--------------------|-----------------------------------|---|------------------|--|
| G | Framing Width | 33-1/4"(| 845mm) | |
| Н | Framing Height * | 31-3/4" (| (806mm) | |
| I | Framing Rise from Floor | 1" (25m | ım) Min. | |
| J | Framing Depth Vertical Horizontal | 19-1/2" (495mm) <i>Vertical Ri</i> se 16-1/2" (419mm) <i>Rigid</i> / 12-3/4" (324mm) <i>Flex</i> | | |
| К | Corner Wall Length | 37-1/2" (953mm) | | |
| L | Corner Facing Wall Width | 53-1/4" (1353mm) | | |
| М | Framed Chase Ceiling* | 36" (914mm) Rigid | 32" (812mm) Flex | |
| N | Vent Centerline Height* | 30" (762mm) Rigid | 26" (660mm) Flex | |
| 0 | Gas Connection Height* | 1 1/2" (38mm) | | |
| Р | Gas Connection Inset* | 4" (102mm) | | |
| Q | Gas Connection Width* | 3" (70 | 6mm) | |


^{*} Measured from base of unit.

FRAMING & FINISHING WITH CONTEMPORARY FACEPLATE

op-

- Determine the total thickness of facing material (e.g. drywall, wood plus ceramic tiles) to allow the finished surface to be flush with the front of the unit. Total facing thickness can vary from 1/2" (13mm) to 1-1/4" (32mm) thick.
- **NOTE:** Facing material may not protrude beyond unit, otherwise the tional accesories will not be able to be mounted to the unit.

Install Side Nailing Strips, and Top Facing Support before unit is slipped into position. See "Unit Assembly Prior to Installation" Section



2) Frame in the enclosure for the unit with framing material.

Note: When constructing the framed opening, please ensure there is access to install the gas lines when the unit is installed.

3) For exterior walls, insulate the enclosure to the same degree as the rest of the house, apply vapour barrier and drywall, as per local installation codes. (Do not insulate the fireplace itself.)

WARNING: Failure to insulate and add vapor barriers to the inside of the exterior wall will result in operational and performance problems including, but not limited to: excessive condensation on glass doors, poor flame package, carbon, blue flames etc. These are not product related issues.

Important:

If the Contemporary Faceplate is used on the P33-NG4/P33-LP4 Gas Fireplace, the burner orifice (Both NG/LP supplied in this package) must be replaced and an overlay decal (also supplied with kit) must be affixed to the current serial number decal supplied with unit.

Note: Also see framing dimensions for this optional front if installed on the P33-4 unit.

Note: Unit must be raised up by 1' to allow for faceplate installation.

Current P33-4 orifice size: #44 #54 Must replace with: #47 #56

Warning: Fire hazard is an extreme risk if these changes are not adhered to.

4) Combustible material may be brought up to the top and sides of the unit and be covered with wood, drywall, ceramic tiles, bricks, rock or other suitable combustible finishing materials.

Note: The unit does not have to be completely enclosed in a chase. The clearance on top of the unit is 0" to the standoffs so combustible building materials can be laid directly on top of the standoffs. You must maintain clearance from the vent to combustible materials for flex or for Rigid Vent (Refer to "Clearances" Section).

 Use steel studs for framing where the 1-1/2" (38mm) clearance from the vent to combustible material cannot be maintained.



The *HeatWave* Duct Kit has different clearance and framing requirements, check the *HeatWave* manual for details.

UNIT ASSEMBLY PRIOR TO INSTALLATION

The Top Facing Support, the Side Nailing Strips and the 2 Top Standoffs must be correctly positioned and attached to the top before the unit is put into position.

Top Standoff Assembly

The top standoffs are shipped in a flat position and must be pulled up and bent into the correct shape.

- Remove the standoffs from on top of the firebox by undoing the screws.
- 2) Take each standoff and bend into the correct shape. Bend up at the bend lines until the screw holes in the standoff and the pre-punched screw holes on the firebox top line-up.
- Attach the standoffs securely to the top with 4 screws per standoff.


Note: Secure the standoffs to the holes closest to the edge of the firebox top.


Top Facing Support & Side Nailing Strips


Determine the total thickness of facing material (e.g. drywall plus ceramic tiles) to allow the finished surface to be flush with the front of the unit. Total facing thickness can vary from 1/2" (13mm) to 1-1/4" (32mm) thick.


The Top Facing Support & Side Nailing Strips can be mounted in various positions depending on the thickness of the facing material.

- Mount Top Facing Support using the 3 supplied screws into the three pre-punched screw holes on the top front of the unit. Adjust support to desired facing material depth.
- 2) Mount Side Nailing Strip using the 3 supplied screws into the three pre-punched screw holes at the front sides of the unit. Adjust support to desired facing material thickness.









VENTING INTRODUCTION

The P33-4 uses the "balanced flue" technology Co-Axial system. The inner liner vents products of combustion to the outside while the outer liner draws outside combustion air into the combustion chamber thereby eliminating the need to use heated room air for combustion and losing warm room air up the chimney.


There are 5 vent systems approved for use with the P33-4: the Regency® Direct Vent Flex System for Horizontal Terminations only and the Simpson Dura-Vent, Selkirk Direct-Temp, Amerivent Direct Vent and Security Secure Vent Systems for Horizontal and Vertical Terminations (see following "Venting" Sections for more details).

Note: These flue pipes must not be connected to any other appliance.

The gas appliance and vent system must be vented directly to the outside of the building, and never be attached to a chimney serving a separate solid fuel or gas burning appliance. Each direct vent gas appliance must use it's own separate vent system. Common vent systems are prohibited. (See "Rigid Pipe Venting System" for more details and exceptions).

NOTE: Ensure compliance with the outside vent terminal location before cutting hole as both dimensions must be met.

EXTERIOR VENT TERMINATION LOCATIONS

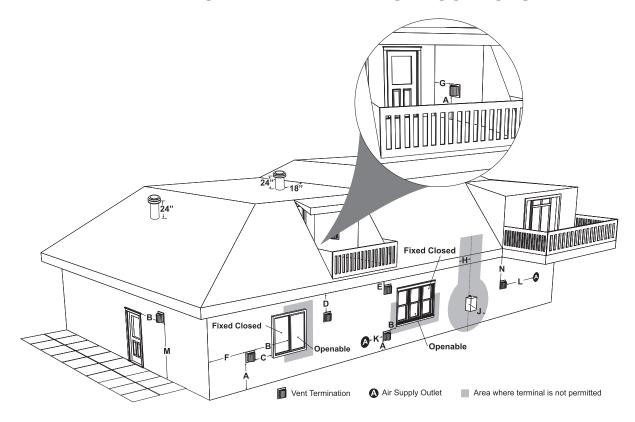

| | Minimum Clearance Requirements | Canada ¹ | USA ² |
|---|---|------------------------|------------------------|
| Α | Clearance above grade, veranda, porch, deck, or balcony | 12"(30cm) | 12"(30cm) |
| В | Clearance to window or door that may be opened | 12"(30cm) | 9" (23cm) |
| С | Clearance to permanently closed window | * | * |
| D | Vertical clearance to ventilated soffit located above the terminal within a horizontal distance of 2 feet (61cm) from the center line of the terminal (check with the local code) | 18"(46cm) | 18"(46cm) |
| Е | Clearance to unventilated soffit | 15"(38cm) | 15"(38cm) |
| F | Clearance to outside corner: with <i>AstroCap</i> Termination Cap. | 6"(15cm) | 6"(15cm) |
| | Clearance to outside corner: with all other approved Termination Caps. | 12"(30cm) | 12"(30cm) |
| G | Clearance to inside corner: with <i>AstroCap</i> Termination Cap | 6"(15cm) | 6"(15cm) |
| | Clearance to inside corner: with all other approved Termination Caps. | 12"(30cm) | 12"(30cm) |
| Н | Clearance to each side of center line extended above meter/regulator assembly | 36"(90cm) ^a | * |
| J | Clearance to service regulator vent outlet | 36"(90cm) | * |
| К | Clearance to non-mechanical air supply inlet to building or the combustion air inlet to any other appliance | 12"(30cm) | 9" (23cm) |
| L | Clearance to a mechanical air supply inlet #3' (91cm) above if within 10' (3m) horizontally. | 72"(1.8m) | 36"(90cm) ^b |
| М | Clearance above paved sidewalk or a paved driveway located on public property | 84"(2.1m) [†] | * |
| N | Clearance under veranda, porch, deck, or balcony | 12"(30cm)‡ | * |

<sup>In accordance with current CSA B149.1, Natural Gas and Propane Installation Code
In accordance with the current ANSI Z223.1/NFPA 54, National Fuel Gas Code

A vent shall not terminate directly above a sidewalk or paved driveway which is located between two single family dwellings and serves both dwellings.

Permitted only if veranda, porch, deck, or balcony is fully open on a minimum of two sides beneath the floor.</sup>

Clearance in accordance with local installation codes and the requirements of the gas supplier
 3 feet (91cm) within a height of 15 feet (4.5m) above the meter / regulator assembly

b 3 feet (91cm) above - if within 10 feet (3m) horizontally

REGENCY® DIRECT VENT FLEX SYSTEM

Horizontal Terminations Only


This venting system, in combination with the P33-4 Direct Vent Gas Fireplace, have been tested and listed as a direct vent heater system by Warnock Hersey/Intertek. The location of the termination cap must conform to the requirements in the "Exterior Vent Terminal Locations" Section .

Regency® Direct Vent Flex Termination Kit (Part # 946-513) includes all the parts needed to install the P33-4 with a maximum run of 2 feet. If installing the P33 with a <u>continuous</u> vent length of more than 2 ft (.6m) to a maximum of 10 ft. (3.0m) use Kit # 946-515 (4 ft) or 946-516 (10 ft) or see "Rigid Pipe Venting Systems" Section for alternate venting arrangements.

- 1) 6-7/8" dia. flexible liner (2 ft. length)
- 2) 4" dia. flexible liner (2 ft. length)
- 3) spring spacers (3)
- 4) thimble (2)
- 5) AstroCap termination cap (1)
- 6) screws (12)
- 7) tube of Mill Pac (1)
- 8) plated screws (8)
- 9) screws #8 x 1-1/2" drill point, stainless steel (4)


Notes:


- 1) Liner sections should be continuous without any joints or seams.
- Only Flex pipe purchased from Regency[®] may be used for Flex installations.

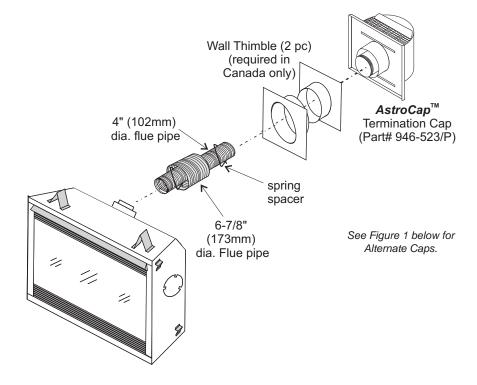

<u>MINIMUM</u> RIGID PIPE CENTER-LINE

<u>MINIMUM</u> FLEX KIT CENTER-LINE





Note: for P33-NG4 with contemporary faceplate - unit must be raised by 1".




Figure 1

Wherever necessary due to external location of cap, the AstroCap can be replaced with the FPI Riser Vent Termination Cap or the Dura-Vent Snorkel Termination Cap.

INSTALLATION PROCEDURES

for Regency® Direct Vent System (Flex)

 Locate the unit in the framing, rough in the gas (preferably on the right side of the unit) and the electrical (Junction block is on the left side) on the left. Locate the centerline of the termination and mark wall accordingly. Cut a 10"(254mm) hole in the wall (inside dimension).

Note: To make the installation more aesthetically pleasing, werecommend framing out a square to mount the terminal to.




Note: A 2-1/2" (64mm) horizontal top and 1-1/2" (38mm) horizontal sides & bottom clearance around the liner must be maintained except that only a 1" (25mm) clearance is needed at the termination end. We recommend framing a 10"(254mm) x 10"(254mm) (inside dimensions) hole to give structural rigidity for mounting the termination.

Note: If installing termination on a <u>siding</u>
<u>covered wall</u>, <u>furring strips</u> must be
used to ensure that the termination
is not recessed into the siding.

- Level the fireplace and fasten it to the framing using nails or screws through the nailing strips.
- 3) Assemble the vent assembly by applying Mill Pac to the 4"(100mm) inner collar of the termination and slipping the 4"(100mm) liner over it at least 1-3/8" (35mm). Fasten with the 3 screws (drilling pilot holes will make this easier). Apply Mill Pac or high temperature silicone to the 6-7/8" (175mm) flex pipe and slip it over the 6-7/8" outer collar of the vent terminal at least 1-3/8"(35mm) and fasten with the 3 screws.
- 4) Separate the 2 halves of the wall thimble and securely fasten the one with the tabs to the outside wall making sure that the tabs are on top and bottom. Fasten the other thimble half to the inside wall. The thimble halves slip inside each other and can be adjusted for 2 x 4 or 2 x 6 walls. The liners must slip over the collars a minimum of 1-3/8".

*If this is an outside corner, the minimum distance between the vent and the outside corner is 6" (15cm) with *AstroCap* termination cap or 12" (30cm) with Dura-Vent termination cap. See "F" in the diagram in "Exterior Vent Trmination Locations" Section.




Minimum and Maximum Vent Clearances

- 5) Slip the assembled liner and termination assembly through the thimble making sure the termination cap faces up (there are markings on the cap that show which way is up). This will position the termination cap with proper down slope for draining water. Fasten the cap to the outer wall with the 4 supplied screws.
- 6) Pull the centre 4"(100mm) liner and outer 6-7/8"(175mm) liner out enough to slip over the flue collars of the fireplace.
- Apply Mill Pac over the fireplace inner collar and slip the 4"(100mm) liner down over it and attach with 3 supplied screws.

- 8) Do the same with the 6-7/8" (175mm) liner.
 - Apply a bead of silicone between the thimble and termination and around the outer edge of the terminal at the wall in order to keep the water out.

IMPORTANT: Do not locate termination hood where excessive snow or ice buildup may occur. Be sure to check vent termination area after snow falls, and clear to prevent accidental blockage of venting system. When using snow blowers, make sure snow is not directed towards vent termination area.

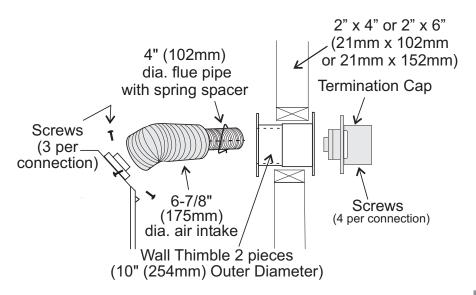

RIGID PIPE VENTING SYSTEMS


Horizontal or Vertical Terminations


The minimum components required for a basic horizontal termination are:


- 1 AstroCap Horizontal Termination Cap
- 1 45° Elbow
- 1 Rigid Pipe Adaptor
- 1 Wall Thimble
- Length of pipe to suit wall thickness (see chart)


For siding other than vinyl furring strips may be used, instead of the vinyl siding standoff, to create a level surface to mount the vent terminal. The Terminal must not be recessed into siding.

If a Vinyl Siding Standoff is required (it must be used with vinyl siding), measure to outside surface of wall without siding and add 2 inches.







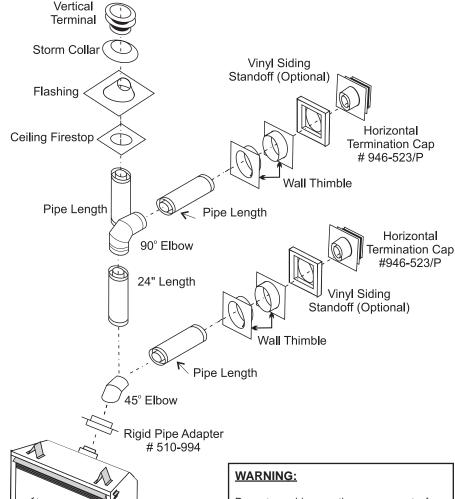

Do not combine venting components from different venting systems.

However use of the AstroCap $^{\text{TM}}$ and FPI Riser is acceptable with all systems.

This product has been evaluated by Intertek for using a Rigid Pipe Adaptor in conjunction with Duravent Direct-Vent, Selkirk Direct-Temp, Ameri Vent Direct venting and Security Secure Vent systems. Use of these systems with the Rigid Pipe adaptor is deemed acceptable and does not affect the Warnok Hersey/Intertek listing of components.

When using Rigid Vent other than Simpson Dura-Vent, 3 screws must be used to secure rigid pipe to adaptor.

The FPI AstroCap[™] and FPI Riser Vent terminal are certified for installations using FPI venting systems as well as Simpson Dura-Vent[®] Direct Vent Pro, American Metal Products Ameri Vent Direct Vent, Security Secure Vent[®], Selkirk Direct-Temp. AstroCap[™] is a proprietary trademark of FPI Fireplace Products International Ltd. Dura-Vent® and Direct Vent are registered and/or proprietary trademarks of Simpson Dura-Vent Co. Inc.

4" X 6-5/8" RIGID PIPE CROSS REFERENCE CHART
Components from different Manufacturers may not be mixed. Not All Rigid Pipe components are available directly from FPI.

| Componen | 4" X 6- 5/8" F its from different Manufactur | | ROSS REFERE Not all rigid pipe compone | | from Regency. | |
|--------------------------------------|---|-------------------------|---|-------------------------|---------------------------|---------------------|
| Description | Simpson Direct Vent Pro® | Selkirk Direct Temp™ | American Metal Products® Amerivent Direct | Metal-Fab™ Sure Seal | Security Secure- Vent® | ICC Excel Direct |
| 6" Pipe Length-Galvanized | 46DVA-06 | 4DT-6 | N/A | 4D6 | SV4L6 | TC-4DL6 |
| 6" Pipe Length-Black | 46DVA-06B | 4DT-6B | N/A | 4D6B | SV4LB6 | TC-4DL6B |
| 7" Pipe Length-Galvanized | N/A | N/A | 4D7 | N/A | N/A | N/A |
| 7" Pipe Length-Black | N/A | N/A | 4D7B | N/A | N/A | N/A |
| 9" Pipe Length-Galvanized | 46DVA-09 | 4DT-9 | N/A | N/A | N/A | N/A |
| 9" Pipe Length-Black | 46DVA-09B | 4DT-9B | N/A | N/A | N/A | N/A |
| 12" Pipe Length-Galvanized | 46DVA-12 | 4DT-12 | 4D12 | 4D12 | SV4L12 | TC-4DL1 |
| 12" Pipe Length-Black | 46DVA-12B | 4DT-12B | 4D12B | 4D12B | SV4LB12 | TC-4DL1B |
| 18" Pipe Length-Galvanized | 46DVA-18 | 4DT-18 | 4D18 | 4D18 | SV4LA | TC-4DL18 |
| 18" Pipe Length-Black | 46DVA-18B | 4DT-18B | 4D18B | 4D18B | SV4LA | TC-4DL18B |
| 24" Pipe Length-Galvanized | 46DVA-24 | 4DT-24 | 4D24 | 4D24 | SV4L24 | TC-4DL2 |
| 24" Pipe Length-Black | 46DVA-24B | 4DT-24B | 4D24B | 4D24B | SV4LB24 | TC-4DL2B |
| 36" Pipe Length-Galvanized | 46DVA-36 | 4DT-36 | 4D36 | 4D36 | SV4L36 | TC-4DL3 |
| 36" Pipe Length-Black | 46DVA-36B | 4DT-36B | 4D36B | 4D36B | SV4LB36 | TC-4DL3B |
| 18" Pipe Length-Galvanized | 46DVA-48 | 4DT-48 | 4D48 | 4D48 | SV4L48 | TC-4DL4 |
| 18" Pipe Length-Black | 46DVA-48B | 4DT-48B | 4D48B | 4D48B | SV4LB48 | TC-4DL4B |
| 60" Pipe Length-Galvanized | 46DVA-60 | 4DT-60 | N/A | N/A | N/A | N/A |
| 60" Pipe Length-Black | 46DVA-60B | 4DT-60B | N/A | N/A | N/A | N/A |
| oo i ipo Longin Didok | 40577 005 | 451 005 | 14/71 | 14/1 | 1071 | 14/71 |
| Adjustable Length 3"-10"-Galvanized | N/A | N/A | N/A | 4DAL | N/A | TC-4DLT |
| Adjustable Length 3"-10"-Black | N/A | N/A | N/A | 4DALB | N/A | TC-4DLTB |
| Adjustable Length 7"-Galvanized | N/A | N/A | 4D7A | N/A | N/A | N/A |
| Adjustable Length 7"-Black | N/A | N/A | 4D7AB | N/A | N/A | N/A |
| Extension Pipe 8-1/2"-Galvanized | 46DVA-08A | N/A | N/A | N/A | N/A | N/A |
| Extension Pipe 8-1/2"-Black | 46DVA-08AB | N/A | N/A | N/A | N/A | N/A |
| Adjustable Length 12"-Galvanized | N/A | N/A | 4D12A | N/A | SV4LA12 | N/A |
| Adjustable Length 12"-Black | N/A | N/A | 4D12A | N/A | SV4LBA12 | N/A |
| Extension Pipe 16"-Galvanized | 46DVA-16A | N/A | N/A | N/A | N/A | N/A |
| Extension Pipe 16"-Black | 46DVA-16AB | N/A | N/A | N/A | N/A | N/A |
| 45° Elbow-Galvanized | 46DVA-E45 | 4DT-EL45 | 4D45L | N/A | N/A | TE-4DE45 |
| 45° Elbow-Black | 46DVA-E45B | 4DT-EL45B | 4DT-EL45B | N/A | N/A | TE-4DE45B |
| 45° Elbow Swivel-Galvanized | See 46DVA-E45 | N/A | N/A | 4D45L | SV4E45 | N/A |
| 45° Elbow Swivel-Black | See 46DVA-E45B | N/A | N/A | 4D45LB | SV4EB45 | N/A |
| 90° Elbow-Galvanized | 46DVA-E90 | 4DT-EL90S | 4DT-EL90S | N/A | N/A | TE-4DE90 |
| 90° Elbow-Black | 46DVA-E90B | 4DT-EL90SB | 4DT-EL90SB | N/A | SV4EBR90-1 | TE-4DE90B |
| 90° Elbow, Swivel-Galvanized | See 46DVA-E90 | N/A | N/A | 4D90L | SV4E90-1 | N/A |
| 90° Elbow, Swivel-Black | See 46DVA-E90B | N/A | N/A | 4D90LB | SV4EB90-1 | N/A |
| 90° Starter Elbow, Swivel-Galvanized | N/A | N/A | N/A | 4D90A | N/A | N/A |
| Adaptor* | N/A | N/A | N/A | 4D90L | N/A | N/A |
| | 1 | | | | | 1 |
| Ceiling Support | N/A | 4DT-CS | 4DFSP | 4DSP | SV4SD | TE-4DE45 |
| Cathedral Support Box | 46DVA-CS | 4DT-CSS | 4DRSB | 4DRS | SV4CSB | TE-4DE45B |
| Wall Support/Band | 46DVA-WS | 4DT-WS/B | 4DWS | 4DWS | SV4BM | N/A |
| Offset Support | 46DVA-ES (N/A - FPI) | 4DT-OS | N/A | N/A | SV4SU | N/A |
| Wall Thimble-Black | 46DVA-WT | 4DT-WT | 4DWT | 4DWT | SV4RSM | TE-4DE90 |
| Wall Thimble Support/Ceiling Support | 46DVA-DC | N/A | N/A | N/A | SV4PF | TE-4DE90B |
| Firestop Spacer | 46DVA-FS | 4DT-FS | 4DFSP | 4DFS | SV4BF | N/A |
| Trim Plate-Black | N/A | 4DT-TP | 4DFPB | 4DCP | SV4LA | N/A |

| Descriptio | n | Simpson Direct Vent Pro® | Selki Direct Te | | American Metal Products® Amerivent Direct | Metal-Fab™ Sure Seal | Security Secure- Vent® | ICC Excel Direct | |
|---------------------------------------|--|-----------------------------------|--------------------|--------|---|-------------------------|---|---------------------|--|
| Attic Insulation Shield 12 | , | 46DVA-IS N/A@ FPI | N/A | | 4DAIS12 | N/A | SV4RSA | N/A | |
| Attic Insulation Shield - C | old Climates 36" | N/A | N/A | | 4DAIS12 | N/A | N/A | TM-4AS | |
| | | | | | ı | | 1 | | |
| Basic Horizontal Termina | tion Kit (A) | Disc. | 4DT-HKA | | 4DHTK2 | 4DHTKA | SV-SHK | N/A | |
| Horizontal Termination Ki | t (B) | 46DVA-KHA (Changed Components) | 4DT-HKB | | 4DHTK1 | 4DHTKB | SV-HK | N/A | |
| Vertical Termination Kit | | Disc. | 4DT-VKC | | 4DHTK | 4DHTK | SV-FK | N/A | |
| High Wind Vertical Cap | | 46DVA-VCH | N/A | | N/A | N/A | I N/A | Tm-4VT | |
| High Wind Horizontal Cap |) | 46DVA-VCIT | N/A | | N/A | N/A | N/A | TM-4DHT | |
| Horizontal Square Termin | | See 46DVA-HC | 4DT-HHC | | 4DHC | 4DHT | SV4CHC-1 | TM-4HT | |
| | ашоп Сар | 46DVA-VC | 4DT-HVC | | 4DPC 4DVC | 4DH1 | SV4CHC-1 | TM-4HT | |
| Vertical Termination Cap Storm Collar | | 46DVA-08A | 4DT-SC | | 4DSC | 4DSC | SV4FC | TM-SC | |
| Storm Collar | | 40DVA-00A | 401-30 | | 4D3C | 4030 | 374FC | TIVI-3C | |
| Adjustable Flashing 0/12 | -6/12 | 46DVA-F6 | 4DT-ST14 | | 4D12S | 4DST14 | SV4STC14 | TF-4FA | |
| Adjustable Flashing 6/12- | 12/12 | 46DVA-FLA | 4DT-ST36 | | 4D36S | 4DST36 | SV4STC36 | TF-4FB | |
| | | | | | | | | - | |
| Vinyl Siding Standoff | | 46DVA-VSS | 4DT-VS | | N/A | 4DVS | SV4VS | TM-VSS | |
| Vinyl Siding Shield Plate | | N/A | 4DT-VSP | | N/A | N/A | SV4VS | N/A | |
| | | | | | | | | | |
| Snorkel Termination 14" | | 46DVA-SNKL | N/A | | N/A | N/A | N/A | TM-4ST14 | |
| Snorkel Termination 36" | | N/A | N/A | | N/A | N/A | N/A | TM-4ST36 | |
| Restrictor Disk | | N/A | N/A | | N/A | N/A | I N/A | TM-4DS | |
| Extended Vertical Termina | ation Cap | N/A | N/A | | N/A | N/A | N/A | N/A | |
| Chimney Conversion Kit | A (USA only) | 46DVA-KCA | N/A | | N/A | N/A | N/A | TM-4CA6 | |
| Chimney Conversion Kit | B (USA only) | 46DVA-KCB | N/A | | N/A | N/A | N/A | TM-4CA7 | |
| Chimney Conversion Kit | C (USA only) | 46DVA-KCC | N/A | | N/A | N/A | N/A | TM-4CA8 | |
| Chimney Conversion Kit (USA only) | Masonry | 46DVA-KMC | N/A | | N/A | N/A | N/A | N/A | |
| Wall Firestop | | 46DVA-WFS | N/A | | N/A | N/A | N/A | TM-4TR | |
| Colinear Flex Connectors | Colinear Flex Connectors 46DVA-ADF | | N/A | | N/A | N/A | N/A | N/A | |
| FPI | | | | | | | | | |
| | ent Guard (Option | nal) for AstroCap | | 946-20 | 5 | Vinyl Sidina Shiel | Vinyl Siding Shield for Riser Vent Terminal | | |
| | | , , | d piping) | 946-20 | | | Vent Guard (Optional) for Riser Vent Terminal | | |
| | Rigid Pipe Adaptor (Must use with all rigid piping) Riser Vent Terminal | | | - | 946-523/P AstroCap Horizontal Cap | | | | |
| 040-330/1 | -605 Starter Collar Increaser 4" x 6-5/8" to 5" x 8" | | | | 16-206 Vinyl Siding Standoff for AstroCap | | | | |

Note: When using Metal-Fab Sure Seal Rigid Piping - please note that the Adaptor (4DDA) must be used in conjunction with FPI Rigid Pipe Adaptor (510-994).

| Offset Pipe Selection: Use this table to determine offset pipe lengths. | | | | | | | | |
|---|---------------------------------|--------------------|--------------|---|--|--|--|--|
| Pipe Length | Pipe Length 4" x 6-5/8" Venting | | | For specific instructions on venting components - visit the | | | | |
| (L) | Run (X) | Rise (Y) | | manufacturers website listed below. | | | | |
| 0" (0mm) | 4-7/8" (124mm) | 13-7/8" (340mm) | | Simpson Direct Vent Pro: www.duravent.com | | | | |
| 6" (152mm) | 8" (203mm) | 16-1/2" (419mm) | | Selkirk Direct-Temp: www.selkirkcorp.com | | | | |
| 9" (229mm) | 10-1/8" (257mm) | 18-5/8" (473mm) | | American Metal Products: www.americanmetalproducts.com | | | | |
| 12" (305mm) | 12-1/4" (311mm) | 20-3/4" (527mm) | | Metal-Fab Sure Seal: www.mtlfab.com | | | | |
| 24" (610mm) | 20-5/8" (524mm) | 29-1/8" (740mm) | | Security Secure Vent: www.securitychimneys.com | | | | |
| 36" (914mm) | 29" (737mm) | 37-1/2" (953mm) | | Industrial Chimney Company: www.icc-rsf.com | | | | |
| 48" (1219mm) | 37-7/16" (951mm) | 45-15/16" (1167mm) | → X → | | | | | |


Note: Horizontal runs of vent must be level, or have a 1/4" rise for every 1 foot of run towards the termination.


Never allow the vent to run downward - this could cause high temperatures and may present a possible fire hazard.

RIGID PIPE VENTING ARRANGEMENTS

Vertical Terminations (Propane & Natural Gas)

The shaded area in the diagram shows all allowable combinations of straight vertical and offset to vertical terminations, using one 90° elbow, with **rigid pipe** vent systems for Propane and Natural Gas.

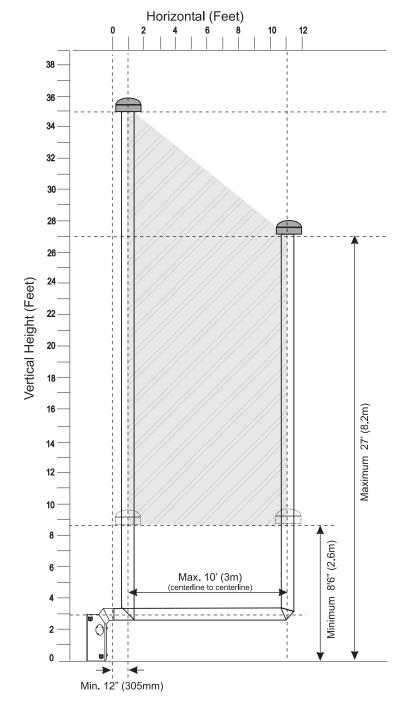

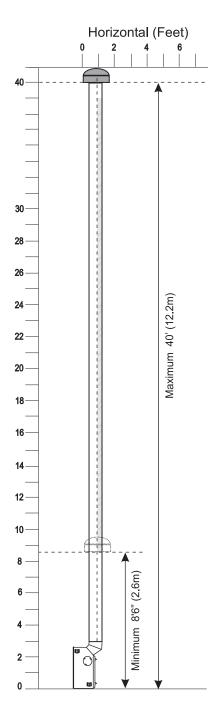

- Vent must be supported at offsets.
- · Firestops are required at each floor level and whenever passing through a wall.
- Maintain clearances to combustibles.
- When using Contemporary Faceplate, unit must be raised 1".


Note: Must use optional rigid pipe adapter when using rigid vent systems (Part # 510-994).

INSTALLATION

The P33-4 is approved for a maximum 40 ft. straight vertical, with **rigid pipe** vent systems for Propane and Natural Gas.

The shaded area in the diagram shows all allowable combinations of straight vertical and offset to vertical terminations with **rigid pipe** vent systems for Propane and Natural Gas. Maximum two 45° elbows allowed.

- Vent must be supported at offsets.
- Firestops are required at each floor level and whenever passing through a wall.
- Maintain clearances to combustibles.
- When using Contemporary Faceplate, unit must be raised 1".

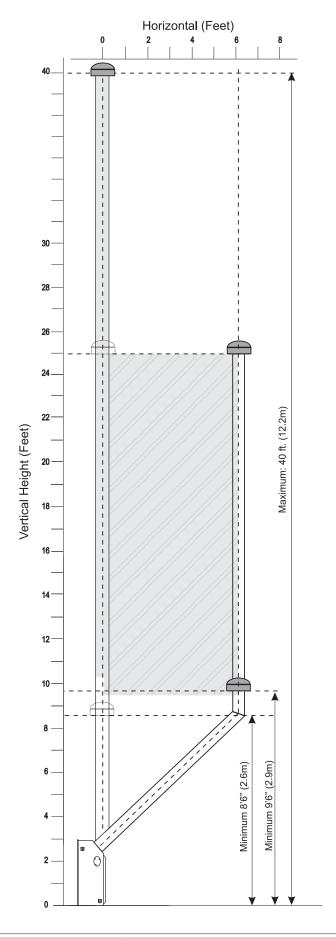


RIGID PIPE VENTING ARRANGEMENTS


Horizontal Terminations REGENCY® DIRECT VENT SYSTEM (FLEX) (Propane & Natural Gas)

This diagram shows all allowable combinations of vertical runs with horizontal terminations, <u>using one 45° and one 90° elbow</u> (two 45° elbows equal one 90° elbow).


Note: Must use optional rigid pipe adaptor (Part # 510-994) when using rigid pipe vent systems. (Refer "Rigid Pipe Venting Systems" Section)

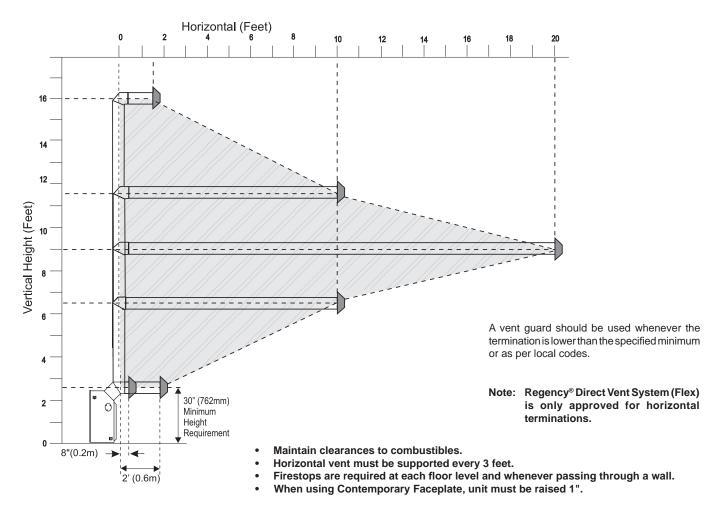

<u>Minimum</u> <u>Simpson Dura-Vent Center-Line</u>



<u>Minimum</u> Flex Kit Center-Line



Horizontal Venting with Two (2) 90° Elbows

One 90° elbow = Two 45° elbows.

| Option | V | H + H1 |
|--------|---------|---------|
| A) | 1' Min. | 3' Max. |
| B) | 2' Min. | 4' Max. |
| C) | 3' Min. | 5' Max. |
| D) | 4' Min. | 6' Max. |
| E) | 5' Min. | 7' Max. |
| F) | 6' Min. | 8' Max. |

With these options, maximum total pipe length is 30 feet with minimum of 6 feet total vertical and maximum 8 feet total horizontal.

Please note minimum 1 foot between 90° elbows is required.


Horizontal Venting with Three (3) 90° Elbows


One 90° elbow = Two 45° elbows.

| Option | Н | ٧ | H+H1+H2 |
|--------|---------|----------|---------|
| A) | 1' Max. | 1' Min. | 3' Max. |
| B) | 2' Max. | 3' Min. | 5' Max. |
| C) | 3' Max. | 5' Min. | 6' Max. |
| D) | 4' Max. | 7' Min. | 7' Max. |
| E) | 5' Max. | 9' Min. | 8' Max. |
| F) | 6' Max. | 11' Min. | 9' Max. |

With these options, maximum total pipe length is 30 feet with minimum of 11 feet total vertical and maximum 9 feet total horizontal.

Please note minimum 1 foot between 90° elbows is required.



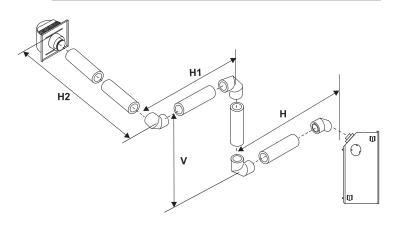


One 90° elbow = Two 45° elbows.

| Opti | on | Н | ٧ | H+H1 |
|------|----|---------|---------|---------|
| A) | | 1' Max. | 1' Min. | 3' Max. |
| B) | | 2' Max. | 2' Min. | 5' Max. |
| C) | | 3' Max. | 4' Min. | 6' Max. |
| D) | | 4' Max. | 6' Min. | 7' Max. |
| E) | | 5' Max. | 8' Min. | 8' Max. |


Ф

With these options, maximum total pipe length is 30 feet with minimum of 8 feet total vertical and maximum 8 feet total horizontal.

Please note minimum 1 foot between 90° elbows is required.

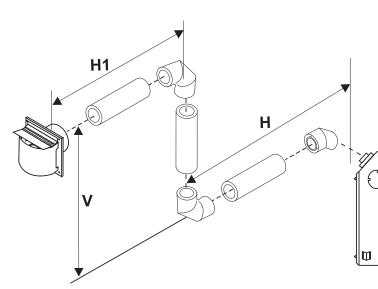

Horizontal Venting with Three (3) 90° Elbows



One 90° elbow = Two 45° elbows.

| V | Н | V+V1 | H+H1 |
|---------|--|---|--|
| 2' Min. | 1' Max. | 3' Min. | 4' Max. |
| 3' Min. | 2' Max. | 4' Min. | 5' Max. |
| 4' Min. | 3' Max. | 6' Min. | 6' Max. |
| 5' Min. | 4' Max. | 8' Min. | 7' Max. |
| 6' Min. | 5' Max. | 10' Min. | 8' Max. |
| 7' Min. | 6' Max. | 12' Min. | 9' Max. |
| | 3' Min. 4' Min. 5' Min. 6' Min. | 2' Min. 1' Max. 3' Min. 2' Max. 4' Min. 3' Max. 5' Min. 4' Max. 6' Min. 5' Max. | 2' Min. 1' Max. 3' Min. 3' Min. 2' Max. 4' Min. 4' Min. 3' Max. 6' Min. 5' Min. 4' Max. 8' Min. 6' Min. 5' Max. 10' Min. |

With these options, maximum total pipe length is 30 feet with minimum of 12 feet total vertical and maximum 9 feet total horizontal.

Please note minimum 1 foot between 90° elbows is required.

Vertical Venting with Two (2) 90° Elbows One 90° elbow = Two 45° elbows.

| Option | V | Н | V+V1 |
|--------|---------|---------|---------|
| A) | 1' Min. | 4' Max. | 2' Min. |
| B) | 2' Min. | 5' Max. | 3' Min. |
| C) | 3' Min. | 6' Max. | 4' Min. |
| D) | 4' Min. | 7' Max. | 5' Min. |
| E) | 5' Min. | 8' Max. | 6' Min. |

With these options, maximum total pipe length is 30 feet with minimum of 6 feet total vertical and maximum 8 feet total horizontal.


Please note minimum 1 foot between 90° elbows is required.


Vertical Venting with Two (2) 90° Elbows One 90° elbow = Two 45° elbows.

| Option | H + H1 | ٧ |
|--------|---------|---------|
| A) | 2' Max. | 2' Min. |
| B) | 3' Max. | 3' Min. |
| C) | 4' Max. | 4' Min. |
| D) | 5' Max. | 5' Min. |
| E) | 6' Max. | 6' Min. |

With these options, maximum total pipe length is 30 feet with minimum of 6 feet total vertical and maximum 6 feet total horizontal.

Please note minimum 1 foot between 90° elbows is required.

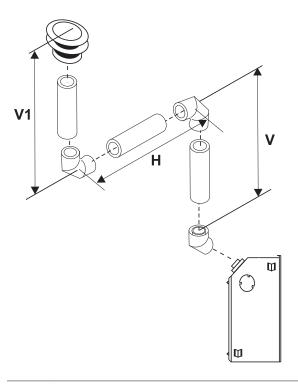

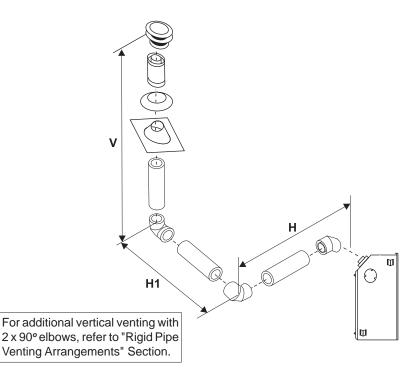


Vertical Venting with Three (3) 90° Elbows


One 90° elbow = Two 45° elbows.

| Option | | | H + H1 | |
|--------|---------|----------|---------|----------|
| A) | 1' Max. | 1' Min. | 3' Max. | 3' Min. |
| B) | 2' Max. | 2' Min. | 4' Max. | 5' Min. |
| C) | 3' Max. | 3' Min.' | 5' Max. | 7' Min. |
| D) | 4' Max. | 4' Min. | 6' Max. | 9' Min. |
| E) | 5' Max. | 5' Min. | 7' Max. | 11' Min. |

With these options, max. total pipe length is 30 feet with min. of 11 feet total vertical and max. 7 feet total horizontal. Please note min. 1 foot between 90° elbows is required.

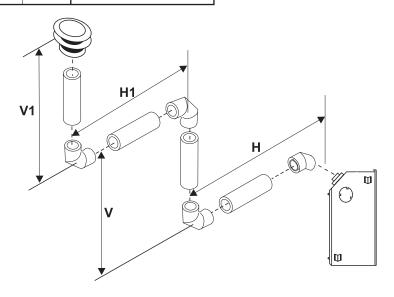

Vertical Venting with Three (3) 90° Elbows

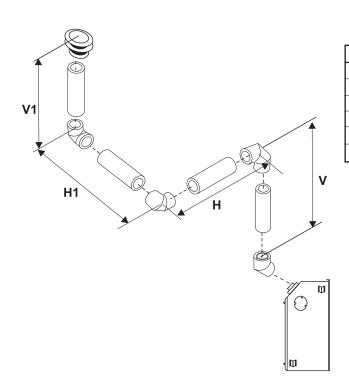

One 90° elbow = Two 45° elbows.

| Option | V | H + H1 | V + V1 | With these options, max. |
|--------|---------|---------|---------|--|
| A) | 2' Min. | 3' Max. | 4' Min. | total pipe length is 30 feet |
| B) | 3' Min. | 4' Max. | 6' Min. | with min. of 10 feet total |
| C) | 4' Min. | 5' Max. | 7' Min. | vertical and max. 8 feet total horizontal. |
| D) | 5' Min. | 6' Max. | 8' Min. | Please note min. 1 foot |
| E) | 6' Min. | 7' Max. | 9' Min. | between 90° elbows is |
| F) | 7' Min. | 8' Max. | 10' Min | required. |

VERTICAL TERMINATION WITH CO-LINEAR FLEX SYSTEM

THE APPLIANCE MUST NOT BE CONNECTED TO A CHIMNEY FLUE SERVING A SEPARATE SOLID FUEL BURNING APPLIANCE.

Masonry chimneys may take various contours which the flexible liner will accommodate. However, **keep the flexible liner as straight as possible**, avoid unnecessary bending.

The Air Intake pipe must be attached to the inlet air collar of the termination cap.

This appliance is designed to be attached to two 3" (76mm) co-linear aluminium flex running the full length of the chimney. See the "Venting Arrangements - Vertical Terminations" Section for minimum and maximum heights.


Required Parts:

Part # Description 946-529 Co-linear DV Vertical **Termination Cap** 948-305 3" Flex - 35 ft. 946-563 Co-Axial to Co-Linear Adapter Kit which contains the following: Co-linear Flex Adapter Outer Pipe Inner Pipe Adapter Rigid Pipe Adaptor 510-994 46DVA-E45 45° Elbow

Alternate Approved Caps


46dva-VC Vertical Termination Cap 46dva-VCH High Wind Cap

46dva-GK 3" Co-linear Adapter with flashing

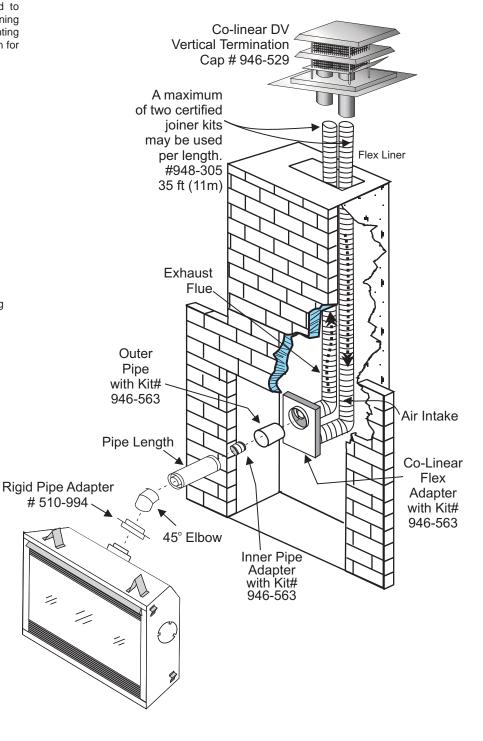

VENTING ARRANGEMENTS - VERTICAL TERMINATIONS

with Co-linear Flex System for both Residential & Manufactured Homes into Masonry Fireplaces

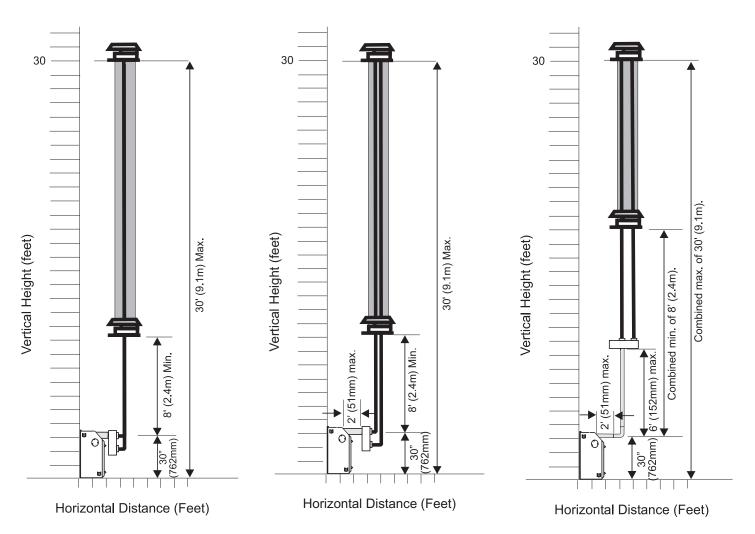

When using Contemporary Faceplate, unit must be raised 1".

The shaded area in the diagrams show the allowable vertical terminations.


UNIT INSTALLATION WITH HORIZONTAL TERMINATION

Install the vent system according to the manufacturer's instructions included with the components.

- Set the unit in its desired location. Check to determine if wall studs or roof rafters are in the way when the venting system is attached. If this is the case, you may want to adjust the location of the unit. Rough in the gas preferably on the right side of the unit and the electrical (junction block is on the left side) on the left.
- 2) Direct Vent pipe and fittings are designed with special twist-lock connections to connect the venting system to the appliance flue outlet. A twist-lock appliance adaptor is an available option that must be used in conjunction with the Simpson Dura-Vent Direct Vent system.
- 3) Put a bead of silicone inside the outer section of the adapter and a bead of Fireplace Mate on the inner collar. Slip the adapter over the existing inner and outer flue collar and fasten to the outer collar only with the 3 supplied screws (drilling pilot holes will make this easier). Level the fireplace and fasten it to the framing using nails or screws through the nailing strips.
- Assemble the desired combination of pipe and elbows to the appliance adaptor and twist-lock for a solid connection.

Note:

a) Twist-lock procedure: Four indentations, located on the female ends of pipes and fittings, are designed to slide straight onto the male ends of adjacent pipes and fittings, by orienting the four pipe indentations so they match and slide in to the four entry slots on the male ends, Dia. 1. Push the pipe sections completely together, then twist-lock one section clockwise approximately one-quarter turn, until the two sections are fully locked. The female locking lugs will not be visible from the outside, on the Black Pipe or fittings. They may be located by examining the inside of the female ends.



NOTE: For best results and optimum performance with each approved venting system, it is highly recommended to apply "Mill-Pac" sealant (supplied) to every inner pipe connection. Failure to do so may result in drafting or performance issues not covered under warranty. Silicone (red RTV) is optional.


- b) Horizontal runs of vent must be supported every three feet. Wall straps are available for this purpose.
- 5) Mark the wall for a 10" x 10" square hole. The center of the square hole should line up with the centerline of the horizontal pipe. Cut and frame the 10 inch square hole in the exterior wall where the vent will be terminated. If the wall being penetrated is constructed of non-combustible material, i.e. masonry block or concrete, a 7"(178mm) diameter (7-1/2"(191mm) dia. for flex) hole is acceptable.

Note:


- a) The horizontal run of vent must be level, or have a 1/4 inch rise for every 1 foot of run towards the termination. Never allow the vent to run downward. This could cause high temperatures and may present the possibility of a fire.
- b) The location of the horizontal vent termination on an exterior wall must meet all local and national building codes, and must not be blocked or obstructed. See "Exterior Vent Terminal Locations" Section.

c) Snorkel Terminations:

For installations requiring a vertical rise on the exterior of the building, 14-inch and 36-inch tall Snorkel Terminations and the Riser Vent as shown in Dia. 2 & 2a are available. Follow the same installation procedures as used for standard Horizontal Termination. NEVER install the snorkel upside down.




*As specified in CGA B149 Installation Code. Local codes or regulations may require different clearances



Below Grade Snorkel Installation If the Snorkel Termination must be installed below grade, i.e. basement application, proper drainage must be provided to prevent water from entering the Snorkel Termination. Refer to Dura-Vent Installation instructions for details. Do not attempt to enclose the Snorkel within the wall, or any other type of enclosure.

6) The arrow on the vent cap should be pointing up. Insure that the 1-1/2" clearances to combustible materials are maintained (Dia. 3). Install the termination cap. AstroCap™ or Dura-Vent Horizontal Termination Cap may be used.




The four wood screws provided should be replaced with appropriate fasteners for stucco, brick, concrete, or other types of sidings.

Note: If installing termination on a siding covered wall, a vinyl siding standoff or furring strips must be used to ensure that the termination is not recessed into the siding.


7) Before connecting the horizontal run of vent pipe to the vent termination, slide the Wall Thimble (Part # 620-926) over the vent pipe.


- 8) Slide the appliance and vent assembly towards the wall carefully inserting the vent pipe into the vent cap assembly. It is important that the vent pipe extends into the vent cap sufficient distance so as to result in a minimum pipe overlap of 1-1/4 inches. Secure the connection between the vent pipe and the vent cap 3 sheet metal screws.
- Install wall thimble in the center of the 10" square and attach with wood screws (Diagram 4).




UNIT INSTALLATION WITH VERTICAL TERMINATION


- Maintain the 1-1/2" clearances (air spaces) to combustibles when passing through ceilings, walls, roofs, enclosures, attic rafter, or other nearby combustible surfaces. Do not pack air spaces with insulation. Check "Venting"
 - Sections for the maximum vertical rise of the venting system and the maximum horizontal offset limitations.







4) Assemble the desired lengths of pipe and elbows. Ensure that all pipes and elbow connections are in the fully twist-locked position and sealed.



NOTE: For best results and optimum performance with each approved venting system, it is highly recommended to apply "Mill-Pac" sealant (supplied) to every inner pipe connection. Failure to do so may result in drafting or performance issues not covered under warranty. Silicone (red RTV) is optional.

5) Cut a hole in the roof centered on the small drilled hole placed in the roof in Step 2. The hole should be of sufficient size to meet the minimum requirements for clearance to combustibles of 1-1/2". Slip the flashing under the shingles (shingles should overlap half the flashing) as per Diagram 3.





Diagram 3: The upper half of the flashing is installed under the roofing material and not nailed down until the chimney is installed. This allows for small adjustments.

6) Continue to assemble pipe lengths.

Note: If an offset is necessary in the attic to avoid obstructions, it is important to support the vent pipe every 3 feet, to avoid excessive stress on the elbows, and possible separation. Wall straps are available for this purpose.

Galvanized pipe is desirable above the roofline due to its higher corrosion resistance. Continue to add pipe sections through the flashing until the height of the vent cap meets the minimum height requirements specified in Dia. 4 or local codes. Note that for steep roof pitches, the vertical height must be increased. A poor draft, or down drafting can result from high wind conditions near big trees or adjoining roof lines, in these cases, increasing the vent height may solve the problem.

7) Ensure vent is vertical and secure the base of the flashing to the roof with roofing rails, slide storm collar over the pipe section and seal with a mastic.



| Roof Pitch | Minimum Vent Heigh | |
|---------------------|--------------------|--------|
| | Feet | Meters |
| flat to 7/12 | 2 | 0.61 |
| over 7/12 to 8/12 | 2 | 0.61 |
| over 8/12 to 9/12 | 2 | 0.61 |
| over 9/12 to 10/12 | 2.5 | 0.76 |
| over 10/12 to 11/12 | 3.25 | 0.99 |
| over 11/12 to 12/12 | 4 | 1.22 |
| over 12/12 to 14/12 | 5 | 1.52 |
| over 14/12 to 16/12 | 6 | 1.83 |
| over 16/12 to 18/12 | 7 | 2.13 |
| over 18/12 to 20/12 | 7.5 | 2.29 |
| over 20/12 to 21/12 | 8 | 2.44 |

 Install the vertical termination cap by twistlocking it.

Note: Any closets or storage spaces, which the vent passes through must be enclosed.

GAS LINE INSTALLATION

The gas line is brought through the right side of the appliance. The gas valve is situated on the right hand side of the unit and the gas inlet is on the right hand side of the valve.

The gas line connection may be made of rigid pipe, copper pipe or an approved flex connector. (If you are using rigid pipe, ensure that the valve can be removed for servicing.) Since some municipalities have additional local codes it is always best to consult with your local authorities and the CAN/CGA B149 installation code.

For USA installations follow local codes and/or the current National Fuel Gas Code, ANSI Z223.1.


When using copper or flex connectors use only approved fittings. Always provide a union so that gas lines can be easily disconnected for servicing. Flare nuts for copper lines and flex connectors are usually considered to meet this requirement.

Important: Always check for gas leaks with a soap and water solution or gas leak detector. Do not use open flame for leak testing.


PILOT ADJUSTMENT

Periodically check the pilot flames. Correct flame pattern has three strong blue flames: 1 flowing around the thermopile, 1 around the thermocouple and 1 flowing across the burner (it does not have to be touching the burner).

Note: If you have an incorrect flame pattern, contact your FPI dealer for further instructions.



Incorrect flame pattern will have small, probably yellow flames, not coming into proper contact with the rear burner or thermopile or thermocouple.



HIGH ELEVATION

This unit is approved in Canada for altitude to 4500 ft. (CAN/CGA-2.17-M91). For Natural Gas installations above 4500 ft. follow current CAN/CGA-B149.1.

P33-NG4 System Data

With Flush or Bay Glass:

For 0 to 2000 feet altitude **Burner Inlet Orifice Sizes:** #44 **Max. Input Rating** 22,500 Btu/h **Min. Input Rating** 12,500 Btu/h

For 2000 to 4500 feet altitude **Burner Inlet Orifice Sizes:** #45 **Max. Input Rating** 21,000 Btu/h **Min. Input Rating** 10,500 Btu/h

With Contemporary Faceplate:

For 0 to 4500 feet altitude **Burner Inlet Orifice Sizes** #47

Max. Input Rating17,500 Btu/hMin. Input Rating9,800 Btu/h

Supply Pressure min.5.0" w.c.

Manifold Pressure

(High) 3.8"+/- 0.2" w.c.

P33-LP4 System Data

With Flush or Bay Glass:

For 0 to 4500 feet altitude **Burner Inlet Orifice Sizes:** #54

Max. Input Rating 21,500 Btu/h Min. Input Rating 10,500 Btu/h

With Contemporary Faceplate:

For 0 to 4500 feet altitude **Burner Inlet Orifice Size** #56

Max. Input Rating 15,500 Btu/h 9,000 Btu/h

Supply Pressure min.12.0" w.c.

Manifold Pressure

(High) 11"+/- 0.2"w.c.

GAS PIPE PRESSURE TESTING

The appliance must be isolated from the gas supply piping system by closing its individual manual shut-off valve during any pressure testing of the gas supply piping system at test pressures equal to or less than 1/2 psig. (3.45 kPa). Disconnect piping from valve at pressures over 1/2 psig.


The manifold pressure is controlled by a regulator built into the gas control, and should be checked at the pressure test point.


Note: To properly check gas pressure, both inlet and manifold pressures should be checked using the valve pressure ports on the valve.

- Make sure the valve is in the "OFF" position.
- Loosen the "IN" and/or "OUT" pressure tap(s), turning counterclockwise with a 1/8" wide flat screwdriver.
- Attach manometer to "IN" and/or "OUT" pressure tap(s) using a 5/16" ID hose.
- Light the pilot and turn the valve to "ON" position.
- The pressure check should be carried out with the unit burning and the setting should be within the limits specified on the safety label.
- 6) When finished reading manometer, turn off the gas valve, disconnect the hose and tighten the screw (clockwise) with a 1/8" flat screwdriver. Note: Screw should be snug, but do not over tighten.

S.I.T. VALVE DESCRIPTION

- 1) Gas on/off knob
- 2) Manual high/low adjustment
- 3) Pilot Adjustment
- 4) Thermocouple Connection option
- 5) Outlet Pressure Tap
- 6) Inlet Pressure Tap
- 7) Pilot Outlet
- 8) Main Gas Outlet
- 9) Alternative TC Connection Point





CONVERSION KIT# 434-969 FROM NG TO LP

For P33-4 Using SIT 820 NOVA Gas Valve

THIS CONVERSION MUST BE DONE BY A QUALIFIED GAS FITTER IF IN DOUBT DO NOT DO THIS CONVERSION!!

NOTE: See page 1 for H25 / H27 conversion instructions and page 7 for E33S / U32S conversion instructions.

Each Kit contains one LPG Conversion Kit and one DC Sparker Kit.

LPG Conversion Kit Contains:

| Qι | y. ган# | Description |
|-----|----------------|--------------------------------|
| 1 | 904-163 | Burner Orifice #54 |
| 1 | 904-434 | Burner Orifice #56 |
| (Fo | or use on P33- | 4 with Faceplate ONLY) |

| 1 | 918-590 | Decal "Converted to LPG" |
|---|---------|--------------------------|
| 1 | 908-528 | Red "LPG" label |
| 1 | 904-529 | 5/32" Allen Key |
| 1 | 910-037 | LPG Injector |

| 1 | 910-037 | LPG Injector | | |
|--------------------------|---------|-------------------------|--|--|
| DC Sparker Kit Contains: | | | | |
| Qty. | Part # | Description | | |
| 1 | 820-475 | Bracket DC Sparker | | |
| 1 | 820-476 | Bracket DC Sparker | | |
| 1 | 904-153 | Washer #8 External Star | | |
| 1 | 904-330 | Nut 8-32 Hex | | |
| 1 | 904-438 | Plug Nylon 0.750 Hole, | | |
| | | Black (for H25 only) | | |
| 1 | 904-531 | Bushing Split Plastic | | |
| | | 0.500 in. | | |
| 1 | 904-543 | Screw 8-32 x 3/4 Pan | | |
| | | Head | | |
| 2 | 904-553 | Screw #8 x 1/2 Type | | |
| | | "B", Black Oxide | | |
| 1 | 910-073 | Spark Generator | | |
| | | Battery Holder | | |
| 1 | 910-074 | Spark Generator | | |
| | | Switch C/W Wire | | |
| 1 | 910-078 | Battery Size AA | | |
| | | Energizer En91 | | |
| 2 | 910-199 | Clip Wire Holder | | |
| 1 | 910-903 | Wire Fan To Power Cord | | |
| | | Ground 30 in. | | |
| | 904-781 | Velcro Hook, Black | | |
| | 904-782 | Velcro Hook, Black | | |

Installation of the LPG **Conversion Kit:**


- 1) Shut off the gas supply.
- 2)
- a) Remove the louvers, bay door or faceplate if installed.
- b) Open the flush door and remove the door.
- c) Remove the logs, embers, and brick panels (if used).

d) Remove the 2 screws holding the Burner Assembly to the firebox base. Push the Burner Assembly to the left and lift out.



Remove the 2 screws, push Burner Assembly to the left and lift out.


Unscrew the pilot orifice with the Allen key and replace with the LPG pilot orifice in the kit and replace pilot cap.



Remove burner orifice with a 1/2" wrench and discard. Use another wrench to hold on to the elbow behind the orifice.



Undo clip and remove pilot cap to expose pilot orifice.



Pilot Cap

Pilot assembly is now accessible for steps 4) to 9).



Burner Orifice

Reinstall new burner orifice LPG stamped #54 and tighten.

Warning

Must install LPG Orifice #54 for use with Flush, Louver, or Bay Door.

Must install LPG Orifice #56 for use with Faceplate.

- 7) Turn control knob to the "OFF" position.
- 8) Remove the black protection cap by hand from the high-low knob (Fig.1).



Fig. 1

9) Insert a 5/32" or 4mm Allen wrench into the hexagonal key-way of the screw (Fig. 2), rotate it counter-clockwise until it is free and extract it.



Fig.2

- **10)** Check that the screw is clean and if necessary remove dirt.
- 11) Flip the screw (Fig. 3).




12) Using the Allen wrench as shown in Fig.4, rotate the screw clockwise until snug, do not overtighten.



WARNING!

Do not overtighten the screw. Recommended to grip

13) Verify that if the conversion is from NG to LPG, the screw must be reassembled with the red o-ring visible (Fig. 5).



14) Re-assemble the black protection cap (Fig. 6).



Fig. 6

WARNING!

Also check that the pilot and main burner injectors are appropriate for the gas type.


- 15) See Page 35 for DC Sparker installation.
- 16) Attach the label "This unit has been converted to LPG" near or on top of the serial # decal.
- **17)** Replace yellow "NG" label with red "LPG" label.
- 18) Check for gas leaks.
- 19) Check inlet and outlet pressures.
- 20) Reverse Step 2.
- 21) Check operation of flame control.
- **22)** Check for proper flame appearance and glow on logs.

Installation of the DC Sparker


1) Locate the Piezo Ignitor situated at the side of valve.



 Remove the Piezo Ignitor by unscrewing the nut at the back of the mounting bracket.



 Disconnect the ignitor wire from the Piezo Ignitor and connect it to the DC Sparker.




4) Connect the DC spark generator wires to the SIT Valve with the screw, which is provided in the kit.



5) Locate the ground lug at the receptical box, left of the unit.



6) Connect one end of the supplied green ground wire to the lug with the nut and washer from the kit.



Install the 1/2" bushing to the heat shield.



8) Run the other end of the ground wire and DC spark generator wires through the bushing on the heat shield.



Plug the DC spark generator wires to the DC Sparker.




10) Connect the ground wire to the DC Sparker mounting bracket.



 Install the supplied battery into the DC Sparker Box by opening the battery compartment.


NOTE: The battery in the DC Sparker Box will need to be replaced annually.



12) Mount the heat shield to the DC Sparker. Secure into place with the velcro, which is provided in the kit.



13) Find a location which is not too hot and is easy to reach for changing the battery. Note: It should be kept away from the chain.




14) Tie up the loose wire with the wire clip.



OPTIONAL BRICK PANELS

- 1) Undo the bottom 2 door latches and open and remove glass door. Remove logs.
- Attach the 2 Rear Brick Retaining clips to the rear wall. Loosen the screws in the top and rear wall of the firebox and slide the retaining clips into position (tight against the firebox top) and then tighten the screws.




Note: The logs must not be in the unit.

3) Insert the back brick panel by carefully slipping it between the back wall of the firebox and the rear log bracket.



Put the side panels in next. Slide them in from the front and push them flat up against the wall. Be very careful not to scratch them on the firebox hardware.



5) Slide the Top Brick Panel into position and slide the Top Brick Retaining clips so that they hold the Top Brick Panel in place and tighten down the screws.



LOG SET INSTALLATION

Read the instructions below carefully and refer to the diagrams. If logs are broken do not use the unit until they are replaced. Broken logs can interfere with the pilot operation.


The 3-digit numbers (i.e. 250) are molded into the rear of each log.

Log Kit # 431-930 contains the following pieces:

| A) | 250 | Rear Log | |
|----|-----|---------------------------|---------|
| B) | 254 | Middle Cross Log | |
| C) | 253 | Front Left Cross Log | |
| D) | 251 | Rear Left Log | |
| E) | 252 | Front Right Cross Log | |
| F) | | Embers | 902-156 |
| G) | | Vermiculite | 902-179 |
| H) | | Rock Wool | 902-153 |
| 1) | | Platinum Embers | 946-669 |
| • | | (supplied with packaged m | nanual) |
| | | | |

NOTE: If you will be installing the optional Brick Panels, install the Brick Panels prior to installing the logs.

- 1) Carefully remove the logs from the box and unwrap them. The logs are fragile, handle with care - do not force into position.
- Sprinkle the vermiculite and embers around the firebox base.




Vermiculite Vermiculite

Place the Log 250 on the rear log support pins with the flat side to the back.








4) Place Log 254 on the front right side of the burner. Push the back of the log against the 2 brackets with the notch on the bottom right side of the log fitting into the right side of the grate.



Bracket Bracket




Position Log 253 across the cutouts in Logs 250 and 254 with the notch on the left side of the log fitting into the 2nd grate



2nd Grate Tab



6) Place the bottom left front edge of Log <u>251</u> against the left edge of the burner tray and rest the log on the cutout on Log <u>253</u>.



Cutout

7) Position Log <u>252</u> across the cutouts in Logs 254 and 253. The notch in the bottom right end fitting against the 5th grate tab.



5th Grate Tab



8) Pull off ember size pieces of rock wool and gently place them on the front of the burner tray in the places shown in the photo below. Do not compress the rock wool, leave it loose.

Separate platinum embers and place them on the front of the burner on and around the rock wool.





Place rock wool in these 2 locations on the burner tray.

9) Test fire to ensure proper light off (make sure flame flows smoothly from one end of burner to the other). If there is any flame hesitation, check that area for any blockage of the burner ports.

STANDARD FLUSH DOOR

The standard flush door comes with a black frame. To install the frame, simply hook the top door flange onto the top of the unit and swing the door towards the unit, diagram 1. Be careful that the glass gasket does not roll up; there must be a gap between the gasket and the door lip to ensure that the door sits securely on the unit. See Diagram 2.








Diagram 2

Use the hook to pull the spring out until you can put the hook into the slot on the bottom door bracket. Repeat for 2nd spring. See diagram 3.





Diagram 3

To remove the flush door, reverse the above steps.


OPTIONAL FLUSH TRIM


Attach the round magnets to the back of the top trim piece and to the bottom trim piece, then attach trim to the top and bottom of



FLUSH LOUVERS

- 1) Install the top louver by sliding the two bracket clips into the brackets located underneath the top of the firebox.
- 2) Install the bottom louver by folding the louver down and then sliding the Bottom Louver bracket down onto the 2 pins on the base of the unit (Diagram1). Secure with 1 screw (Diagram 2).





Open the bottom louver. Pull the Burner ON/OFF control box from inside the bottom of the fireplace and position the slots in the bracket over the 2 screws on the left side of the bottom louver. Push down to lock into place. Tighten the screws.





control box

Burner ON/OFF control box attached to bottom flush louver.

DOUBLE SCREEN DOOR

- 1) Pull out the top louver.
- 2) Center the screen door and hook over the flush door.




Open the screen door(s) and secure the screen door to the flush door front with 2 clips on the bottom left and right side.





Clip installed on right side.

Attach the 4 supplied magnets, each to the back of the top and bottom trim pieces (space out evenly) and attach trim to the top and bottom of Bay door.





OPTIONAL BAY DOOR

The Bay louvers MUST be used with the Bay glass option.

The optional Bay door is an overlay on the flush front. The standard flush door and glass must remain on the unit.

- 1) Hook the top of the bay door over the flush door flange and swing the bottom against the bottom flange of the flush door.
- 2) Secure to the flush door bottom bracket with 2 screws provided.






Note: If any maintenance etc. must be done in the firebox, first remove the Bay louvers and door.

OPTIONAL BAY TRIM

BAY LOUVERS

1) Remove flush louver top heat shield by removing the 4 screws.




Flush Louver Top Heat Shield


- 2) Install the bay louver top heat shield and secure with 4 screws.

Bay Louver Top Heat Shield

3) Install top louver by sliding the two bracket clips into the brackets located on top of the bay door. See below. The fitted louver leaves a small gap between faceplate bottom and louver top.



- 4) Install bottom louver by sliding the two bracket clips into the brackets located underneath the bay door. Secure with 1 screw into each Bottom Louver Mounting Bracket as per diagram below. Use the bottom hole in the bracket.
- Slide the valve extension knobs onto the valve knobs. Match the correct ext. knob with the valve knob.




6) Open the bottom louver. Pull the Burner ON/OFF control box from inside the bottom of the fireplace and position the slots in the bracket over the 2 screws on the left side of the bottom louver. Push down to lock into place. Tighten the screws.




Burner ON/OFF control box


FULL SCREEN DOORS

- Before beginning the installation, remove the Glass Door from the unit. Refer to the manual for instructions.
- 2) Slide the Bottom Faceplate Bracket into the bottom of the unit, secure it into the pins located on the inside of the fire box. Once the bracket is in place, tighten the screws into the hinges on the left and right sides.
- 4) a) Before attaching the Full Screen Door Frame to the unit, loosen the left and right side #8 Self Tapping Philips screws located on the inside top of the outer frame of the appliance. Also remove the center screw.
 - b) Slide the cut-outs in the Top and Bottom Flange of the Full Screen Door Frame under the screw heads which were loosened in step 4a). Once the Frame is in place, tighten the screws to secure. Also re-secure the top center screw through the oblong hole.





3) Before attaching the Full Screen Door Frame, remove the Screen Doors from the Full Screen Door Frame by fully opening the doors and lifting up off of the hinges. See important note in step 10.

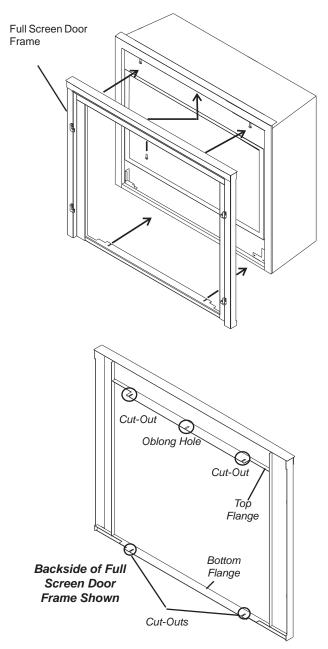


NOTE: Should the finished wall protrude beyond the face of the unit, you can accommodate up to 1/2" depth.


Simply push in the Full Screen Door Frame until it aligns against the finished wall. Secure Top Flange of Full Screen Door Frame as described in step 4 b).

For the Bottom Flange of the Full Screen Door Frame, push the bottom of the Frame until it aligns with the wall. Use the inner cut-outs to secure the base of the Frame using the 2 x #8 Self Tapping Phillips screws provided.


5) Install the Hinges to the Hinge Brackets on the left and right side of the Bottom Faceplate Bracket (seen in step 2), secure using 2 x #8 Self Tapping Philips screws per hinge.




6) Place the Bottom Frame near the hinges, and flip down the hinges from the Bottom Face Plate. Secure the hinges in place to the Bottom Frame, using 2x #8 Self Tapping Phillips screws per hinge.



 Mount the Burner ON/OFF Control Box to the left side of the Bottom Grill using 2 x #8 - 1/4" Philips Head Screws.




- 8) Re-install Glass Door. Refer to the manual for instructions.
- 9) Slide the Top Grill into the louver brackets located on the inside top of the firebox. Push in place.

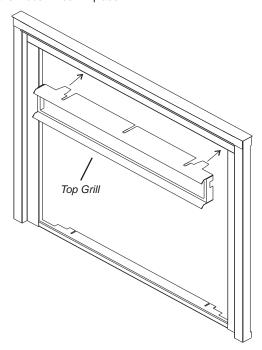

10) Install the Left and Right Side Screen Doors in the fully open position by placing over top of the hinges on the Full Screen Door Frame.

NOTE: Failure to install the doors in the fully open position could result in paint damage to the surface of the door.

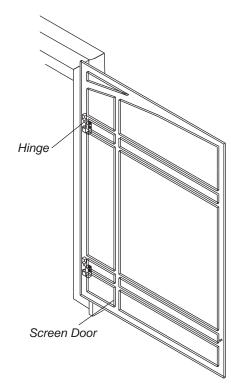

11) Close screen doors.

CONTEMPORARY FACEPLATE INSTALLATION PART 1 (DERATING TO LOWER BTU RATING)

THIS CONVERSION MUST BE DONE BY A QUALIFIED GAS FITTER IF IN DOUBT DO NOT DO THIS CONVERSION!!

1) Shut off the gas supply.

2) a) Open the flush door and remove the door (see p.37 in the P33-4 manual).

b) Remove the logs, embers, and brick panels (if used).

c) Remove the 2 screws holding the Burner Assembly to the firebox base. Push the Burner Assembly to the left and lift out.

Contemporary Faceplate Derating Kit Contains:

Qty. Part # Description 904-434 Burner Orifice #47 (Natural Gas)


904-241 Burner Orifice #56 (Propane Gas)

(NOTE: Must also use Kit #434-969 with

P33 units and Kit #425-972 with P33E uni


Decal Overlay 918-777

918-767 Instruction Sheet

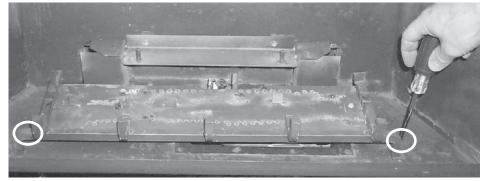

Remove the 2 screws, push Burner Assembly to the left and lift out.

3) Remove burner orifice with a 1/2" wrench and discard. Use another wrench to hold on to the elbow behind the orifice.



Burner Orifice

4) Reinstall new burner orifice and tighten.

NG #47

*LP #56 (LP Conversion - Must also use Kit #434-969 with P33 units and Kit #425-972 with P33E units)

5) Reverse Steps 1 and 2.

Note: Place Decal Derating P33-4 (918-777) to decal plate by overlaying existing decal located on the front side base of the unit.

* For conversion from NG to LP refer to the NG to LP conversion section in the P33-4 manual.

CONTEMPORARY FACEPLATE INSTALLATION PART 2

CONTROL MOUNTING PLATE INSTALLATION

(FOR P33-4 UNIT WITH FACEPLATE ONLY)

- 1) Remove top and bottom louvers.
- 2) Remove ON/OFF switch (for P33-4) from the bottom louver.
- Attach ON/OFF switch to control mounting plate with one screw as shown below.



- 4) If installing the optional fan, see instructions below otherwise proceed with the installation of the control mounting plate.
- Install the control mounting plate over the pin, located at the left base of the unit. Secure with 1 screw as shown.



Pin


INSTALLING THE OPTIONAL FAN

(FOR P33-4 UNIT WITH FACEPLATE ONLY)


120 Volt AC power is needed for the fan switch and blower. The fan can be hard wired if desired. The receptacle box should be installed on the left hand side of the unit by a qualified electrician. The neutral (wider) slot of the polarized receptacle should be at the top.

Unit must be grounded at all times. Do not cut the ground terminal off under any circumstances.

- 1) Shut the power off.
- 2) Turn the fan base on its side (with the base facing towards you) and then slide the fan in towards the rear of the unit. Turn the fan upright and slip it over the two mounting studs. Take care not to damage the insulation on the fan base. Ensure that the fan blades do not rub against the valve tubing. Diagram 1.
- 3) Connect fan ground cable to ground lug. Refer to wiring diagram.



5) Slide the thermodisc/cover assembly into the bracket clip on the underside of the firebox. Check that no wire will touch the hot surfaces. Diagram 2.



- 9) Secure the fan wires and power cord by attaching one of the adhesive backed wire holder clips (Part #910-199) onto the Fireplace base. Use the second clip to bundle up the wires approximately 4" from the control box. Ensure that there is no interference with the wires when the faceplate and trim are installed and that no wire will touch
- 10) Plug the fan power cord into the rear end of the receptacle box to provide the maximum clearance.
- 11) Clip the fan control box to the ON/OFF switch (already installed on the control mounting plate. Secure the fan control box with one screw as shown below.
- 12) Install control mounting plate to unit (see step 5 this page).



the hot metal surfaces or sharp edges.



TO REMOVE THE FAN

- 1) Shut the power off.
- 2) Reverse the above instructions.

Note: The bearings are lubricated for life. Do not lubricate them. Make sure you vacuum the fan area on a regular basis.

IMPORTANT:

These fans collect a lot of dust from within your home. Ensure you maintain these fan motors on a regular basis by vacuuming out the fan blades and housing using a soft brush nozzle.

CONTEMPORARY FACEPLATE INSTALLATION PART 3


| Faceplate | | | | |
|-----------|-----------------------------|--|--|--|
| 434-033 | Mounting Plate | | | |
| 434-514 | Faceplate Support | | | |
| 434-032 | Control Shield | | | |
| 434-018F | Heat Deflector | | | |
| 434-516 | Faceplate - Black | | | |
| 434-516BL | Faceplate - Blue | | | |
| 434-516R | Faceplate - Red | | | |
| 434-517 | Faceplate - Stainless Steel | | | |


1) Install the control shield with 2 #8 - 1/2" Phillips screws to the bottom of the flush door as shown in Diagram 1.



Diagram 1

Install the heat deflector on the fire box as shown in Diagrams 2 & 3.
 Loosen 3 Phillips head screws already in firebox, slide heat deflector on to screws and retighten.





3) Loosen 4 phillips head screws located inside firebox, for screw locations see Diagram 4. Install mounting frame and retighten screws.






Diagram 4

4) After the frame has been installed, locate the 2 phillips head screws on lower part of the mounting frame- see Diagram 3 for location. Slide on the 2 faceplate supports and retighten the screws.

Important: Positon of bracket must be as shown in Diagram 5, with bend away from fireplace.




The top of the faceplate has a flange that hooks over the top of the flush door.

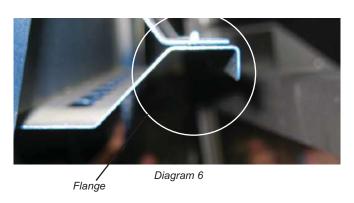

6) Hook the flange on the faceplate over the top of the flush door and gently lower the faceplate into place until it rests against the faceplate supports as shown in Diagrams 7 & 8.



Diagram 7










Diagram 9

Image of P33S with Faceplate

Optional REMOTE CONTROL

Use the Regency® Remote Control Kit approved for this unit. Use of other systems may void your warranty.

The remote control kit comes with a hand held transmitter, a receiver and a wall mounting plate.

 Choose a convenient location on the wall to install the receiver and the receptacle box (protection from extreme heat is very important). Run wires from the fireplace to that location. Use Thermostat Wire Table.

CAUTION Do not wire millivolt remote control wires to 120V wire.

Connect the two wires to the gas valve. See diagram below.

| Thermostat Wire Table | | | | | |
|---|--------|--|--|--|--|
| Recommended Maximum Lead Length (Two-Wire) When Using Wall Thermostat (CP-2 System) | | | | | |
| Wire Size Max. Length | | | | | |
| 14 GA. | 50 Ft. | | | | |
| 16 GA. | 32 Ft. | | | | |
| 18 GA. | 20 Ft. | | | | |
| 20 GA. 12 Ft. | | | | | |
| 22 GA. 9 Ft. | | | | | |

3) Install 3AAAalkaline batteries in transmitter and 4 AA alkaline batteries in the receiver. Install the receiver and its cover in the wall. Switch the remote receiver to "remote" mode. The remote control is now ready for operation.

Optional WALL THERMOSTAT

A wall thermostat may be installed if desired, connect the wires as per the wiring diagram. Use table below to determine the maximum wire length.

Note: Preferable if the thermostat is installed on an interior wall.

Regency® offers an optional programmable thermostat but any 250-750 millivolt rated non-anticipator type thermostat that is CSA, ULC or UL approved may be used.

CAUTION

Do not wire millivolt thermostat wires to 120V wire.

Optional WALL SWITCH


 Run the supplied 15' of wire through the right or left side gas inlet opening. Be careful not to damage wire.

Note: We recommend a maximum of 15' of wire but if you wish to go with a longer run, use the Thermostat Wire Table.

Connect the wire to the wall switch and install into the receptacle box. Also attach wires to the valve as shown below.

CAUTION

Do not wire millivolt wall switch wires to 120V wire.




WIRING DIAGRAMS

This heater does not require a 120V A.C. supply for operation. In case of a power failure, the burner switch and the optional remote control/thermostat will continue to operate. However, a 120V A.C. power supply is needed for the fan/blower operation.

(Do not cut the ground terminal off under any circumstances.)


NOTE: Even if the fan is not purchased with the unit, it is still a good idea to bring power to the receptacle box (provided with the unit) in case the fan is installed at a later date.

For NATURAL GAS Units and Units NOT Equipped with DC Spark Boxes

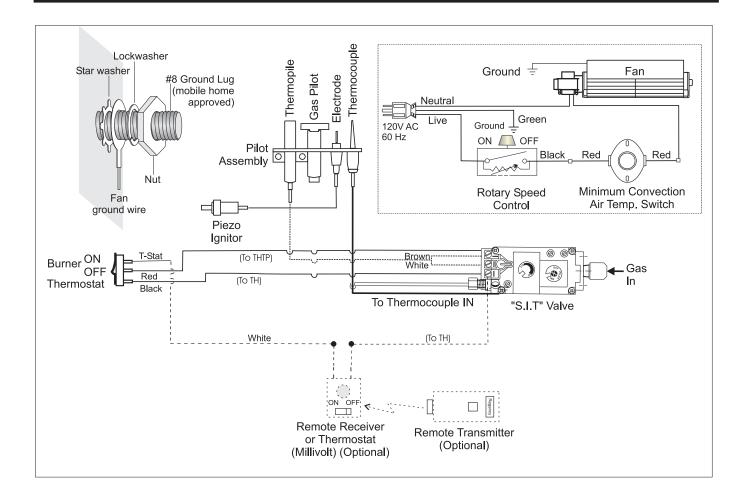

For PROPANE Units and Units Equipped with DC Spark Boxes*


*For installation of the DC Spark Box refer to the LP Conversion instructions in this manual.

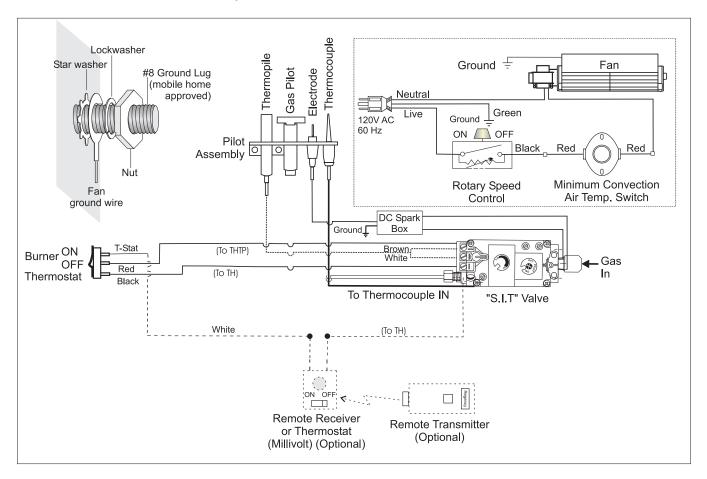

Caution: Ensure that the wires do not touch any hot surfaces and are away from sharp edges.

CAUTION: Label all wires prior to disconnection when servicing controls. Wiring errors can cause improper and dangerous operation.

Openings for electrical connections



INSTALLING THE OPTIONAL FAN

120 Volt AC power is needed for the fan switch and blower. The fan can be hard wired if desired. The receptacle box should be installed on the left hand side of the unit by a qualified electrician. The 12) Secure the fan wires and power cord by

neutral (wider) slot of the polarized receptacle should be at the top.

Unit must be grounded at all times. Do not cut the ground terminal off under any circumstances.

- 1) Shut the power off.
- Remove the standard flush door and the optional bay door, if installed. Open the bottom louver door.
- Loosen the 2 screws holding the Burner ON/OFF switch and bracket to the bottom louver and lift the assembly out.
- 4) Turn the fan base on its side (with the base facing towards you) and then slide the fan



in towards the rear of the unit. Turn the fan upright and slip it over the two mounting studs. Take care not to damage the insulation on the fan base. Ensure that the fan blades do not rub against the valve tubing. Diagram 1.

- Connect fan ground cable to ground lug. Refer to wiring diagram.
- 6) Slide the thermodisc/cover assembly into the bracket clip on the underside of the firebox. Check that no wire will touch the hot surfaces. Diagram 2.
- Attach the Fan control box to the Burner ON/OFF control box. Diagram 3.
- Secure the two boxes together with one screw.
- 9) Position the control box assembly on the




Diagram 1




Diagram 2

DI CONTRACTOR DE CONTRACTOR DE

Diagram 3: Use the clip & hook on the side of the control boxes to join them together.

bottom louver and mark the position of the slot on the right side bracket.



Secure the 2 boxes together with one screw.

10) Remove the control box assembly and push the hold-down clip onto the louver. Bend the tab until it is at 90° to the louver.




Hold control box assembly in place and mark the position of the right side slot

11) Attach the two control boxes to the bottom louver and tighten the 2 screws on the left side and 1 screw on the right side.



Push hold-down clip onto inside louver and press tab until it is at 90° to louver.



12) Secure the fan wires and power cord by attaching one of the adhesive backed wire holder clips (Part #910-199) onto



Secure left side with 2 screws.



Secure right side with one screw.

the Fireplace base. Use the second clip to bundle up the wires approximately 4" from the control box. Ensure that there is no interference with the wires when the louver is closed and that no wire will touch the hot metal surfaces or sharp edges.

13) Plug the fan power cord into the rear end of the receptacle box to provide the maximum clearance from the louvers.

TO REMOVE THE FAN

- 1) Shut the power off.
- 2) Reverse the above instructions.

Note: The bearings are lubricated for life.

Do not lubricate them. Make sure
you vacuum the fan area on a regular
basis.

IMPORTANT:

These fans collect a lot of dust from within your home. Ensure you maintain these fan motors on a regular basis by vacuuming out the fan blades and housing using a soft brush nozzle.

COPY OF THE LIGHTING PLATE INSTRUCTIONS

FOR YOUR SAFETY READ BEFORE LIGHTING

This appliance must be installed in accordance with local codes, if any; if none, follow the National Fuel Gas Code, ANSI Z223.1/NFPA 54, or Natural Gas and Propane Installation Codes CSA B149.1. (Australia: AG601, New Zealand: NZS 5261)

WARNING: If you do not follow these instructions exactly, a fire or explosion may result causing property damage, personal injury or loss of life. Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Refer to the owner's information manual provided with this appliance. For assistance or additional information consult a qualified installer, service agency or gas supplier.

- This appliance has a pilot which must be lighted by hand. When lighting the pilot, follow these instructions exactly.
- B) BEFORE LIGHTING smell all around the appliance area for gas. Be sure to smell next to the floor because some gas is heavier than air and will settle on the floor.

WHAT TO DO IF YOU SMELL GAS

- Do not try to light any appliance.
- Do not touch any electric switch, do not use any phone in your building.
- Immediately call your gas supplier from a neighbours phone. Follow the gas supplier's
- If you cannot reach your gas supplier, call the fire department
- C) Use only your hand to push in or turn the gas control knob. Never use tools. If the knob will not push in or turn by hand, don't try to repair it, call a qualified service technician. Force or attempted repair may result in a fire or explosion.
- Do not use this appliance if any part has been under water. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control which has been under water.
- E) This appliance needs fresh air for safe operation and must be installed so there are provisions for adequate combustion and ventilation air


CAUTION: Hot while in operation. Do not touch. Severe Burns may result. Due to high surface temperatures keep children, clothing and furniture, gasoline and other liquids having flammable vapors away. Keep burner and control compartment clean. See installation and operating instructions accompanying appliance.

LIGHTING INSTRUCTIONS

STOP! Read the safety information above on this label.

FOR UNITS NOT EQUIPPED WITH ELECTRIC SPARK BOXES:

1) Push in gas control knob slightly and turn clockwise < to "OFF". Knob cannot be turned from "PILOT" to "OFF" unless knob is pushed in slightly. Do not force.





- 2) Wait five (5) minutes to clear out any gas. If you then smell gas STOP! Follow step "B" in the Safety Information above on this label. If you don't smell gas, go to the next step.
- 3) Turn knob on gas control counterclockwise to "PILOT".
- 4) Push in control knob all the way and hold in. Continually push and release the black button on spark igniter until pilot lights. Continue to hold the control knob in for about 1/2 minute after the pilot is lit. Release knob and it will pop back up. Pilot should remain lit. If it goes out, repeat steps 1) to 4). If knob does not pop up when released, stop and immediately call your service technician or gas supplier. If the pilot will not stay lit after several tries, turn the gas control knob to "OFF" and call your service technician or gas supplier.
- 5) Turn gas control knob counterclock-wise to "ON"
- 6) Use rocker switch to operate main burner.

FOR ALL PROPANE UNITS AND UNITS EQUIPPED WITH ELECTRIC SPARK BOXES:

- 1) Push in gas control knob slightly and turn to "PILOT" position.
- 2) Push in control knob all the way and hold in until the pilot lights up. Continue to hold the control knob in for about 20 seconds after the pilot is lit. Release knob.
- 3) Push in gas control knob slightly and turn to "ON" position.
- 4) Turn ON the flame switch.



TO TURN OFF GAS APPLIANCE


- Turn off the flame switch.

DO NOT REMOVE THIS INSTRUCTION PLATE

OPERATING INSTRUCTIONS

- Read and understand these instructions before operating this appliance.
- Check to see that all wiring is correct and enclosed to prevent possible shock.
- 3) Check to ensure there are no gas leaks.
- Make sure the glass in the door frame is properly positioned. Never operate the appliance with the glass removed.
- 5) Verify that the venting and cap are unobstructed.
- 6) Ensure that the brick panels are installed.
- Verify log placement. If the pilot cannot be seen when lighting the unit, the logs have been incorrectly positioned.
- The unit should never be turned off, and on again without a minimum of a 60 second wait.

- control knob.
- 4) When the pilot stays lit, turn the gas knob further counterclockwise to the "ON" position.
- Use the wall switch, thermostat or remote control to turn on the unit.
- 6) Rotate the flame height regulator to adjust the flame height higher or lower.



SHUTDOWN PROCEDURE

- Use the wall switch, thermostat or remote control to turn off the main burner.
- 2) Turn the main gas control clockwise to the "OFF" position to turn off the pilot.
- 3) Turn off all electric power to appliance if service is to be performed.

FIRST FIRE

The first fire in your fireplace is part of the paint curing process. To ensure that the paint is properly cured, it is recommended that you burn your fireplace for at least four (4) hours the first time you use it with the fan on.

When first operated, the unit will release an odour caused by the curing of the paint, the burning off of any oils remaining from manufacturing. Smoke detectors in the house may go off at this time. Open a few windows to ventilate the room for a couple of hours.

The glass panel may require cleaning after the unit has cooled down. DO NOT ATTEMPT TO CLEAN THE GLASS WHILE IT IS HOT.

Note: When the glass is cold and the appliance is lit, it may cause condensation and fog the glass. This condensation is normal and will disappear in a few minutes as the glass heats up.

DO NOT BURN THE APPLIANCE WITHOUT THE GLASS FRONT IN PLACE.

During the first few fires, a white film may develop on the glass front as part of the curing process. The glass should be cleaned or the film will bake on and become very difficult to remove. Use a non-abrasive cleaner and NEVER clean the glass while it is hot.

AERATION ADJUSTMENT

The air shutter can be adjusted by moving the adjusting wire up or down. The wire is accessed through the bottom louver opening. Open the air shutter for a blue flame or close for a yellower flame. The burner aeration is factory set but may need adjusting due to either the local gas supply or altitude.

Minimum Air Shutter Opening:


3/16" Natural Gas - Orifice # 44

1/8" NG (w/faceplate) -Orifice #47

3/8" Propane - Orifice # 54

1/4" LP (w/faceplate) - Orifice #56

CAUTION: Carbon will be produced if air shutter is closed too much.



Adjustment Wire: push to close or pull to open aeration cap

Closed - Tall yellow Open - Short blue

Note: Any damage due to carboning resulting from improperly setting the aeration controls is NOT covered under warranty.

Note: Aeration Adjustment should only be performed by an authorized Regency® Installer at the time of installation or service.

LIGHTING PROCEDURE

IMPORTANT

To ignite or reignite the pilot, you must first release the tension springs below the door.

Only when the pilot holds, without pressure being applied to the control knob, reapply the tension springs to the door. The unit *must not* be operated with the tension springs unattached.

NOTE: For all propane units and units equipped with electric spark boxes, see "Copy of Lighting Plate Instructions" section for more details.

IMPORTANT: Gas on/off knob cannot be turned from "PILOT" to "OFF" unless it is partially depressed.

- 1) Turn burner OFF using "ON/OFF" switch.
- 2) Turn gas control knob so indicator points to "OFF" position and allow 5 minutes for any gas in the combustion chamber to escape.
- 3) Turn gas control knob counterclockwise so indicator points to the "PILOT" position. Depress the gas control knob fully. Depress the igniter button several times until the pilot lights. After approximately one minute, release the gas control knob. The pilot flame should continue to burn. If the pilot does not remain lit, repeat operation allowing a longer period before releasing gas

NORMAL OPERATING SOUNDS OF GAS APPLIANCES

It is possible that you will hear some sounds from your gas appliance. This is perfectly normal due to the fact that there are various gauges and types of steel used within your appliance. Listed below are some examples. All are **normal operating sounds** and should not be considered as defects in your appliance.

Blower:

Regency® gas appliances use high tech blowers to push heated air farther into the room. It is not unusual for the fan to make a "whirring" sound when ON. This sound will increase or decrease in volume depending on the speed setting of your fan speed control.

Burner Tray:

The burner tray is positioned directly under the burner tube(s) and logs and is made of a different gauge material from the rest of the firebox and body. Therefore, the varying thicknesses of steel will expand and contract at slightly different rates which can cause "ticking" and "cracking" sounds. You should also be aware that as there are temperature changes within the unit these sounds will likely re-occur. Again, this is normal for steel fireboxes.

Blower Thermodisc:

When this thermally activated switch turns ON it will create a small "clicking" sound. This is the switch contacts closing and is normal.

Pilot Flame:

While the pilot flame is on it can make a very slight "whisper" sound.

Gas Control Valve:

As the gas control valve turns ON and OFF, a dull clicking sound may be audible, this is normal operation of a gas regulator or valve.

Unit Body/Firebox:

Different types and thicknesses of steel will expand and contract at different rates resulting in some "cracking" and "ticking" sounds will be heard throughout the cycling process.

MAINTENANCE INSTRUCTIONS

- Always turn off the gas valve before cleaning. For relighting, refer to lighting instructions. Keep the burner and control compartment clean by brushing and vacuuming at least once a year. When cleaning the logs, use a soft clean paint brush as the logs are fragile and easily damaged.
- 2) Clean appliance and door with a damp cloth (never when unit is hot). Never use an abrasive cleaner. The glass should be cleaned with a gas fireplace glass cleaner. The glass should be cleaned when it starts looking cloudy.
- The heater is finished in a heat resistant paint and should only be refinished with heat resistant paint. Regency® uses StoveBright Paint - Metallic Black #6309.
- 4) Make a periodic check of burner for proper position and condition. Visually check the flame of the burner periodically, making sure the flames are steady; not lifting or floating. If there is a problem, call a qualified service person.
- 5) The appliance and venting system must be inspected before use, and at least annually, by a qualified field service person, to ensure that the flow of combustion and ventilation air is not obstructed.

Note: Never operate the appliance without the glass properly secured in place.

- 6) Do not use this appliance if any part has been under water. Immediately call a qualified service technician to inspect the appliance and to replace nay part of the control system and any gas control which has been under water.
- 7) Verify operation after servicing.

GENERAL VENT MAINTENANCE

Conduct an inspection of the venting system semiannually. Recommended areas to inspect as follows:

- Check the Venting System for corrosion in areas that are exposed to the elements. These will appear as rust spots or streaks, and in extreme cases, holes. These components should be replaced immediately.
- Remove the Cap, and shine a flashlight down the Vent. Remove any bird nests, or other foreign material.
- 3) Check for evidences of excessive condensation, such as water droplets forming in the inner liner, and subsequently dripping out the joints, Continuous condensation can cause corrosion of caps, pipe, and fittings. It may be caused by having excessive lateral runs, too many elbows, and exterior portions of the system being exposed to cold weather.
- 4) Inspect joints, to verify that no pipe sections or fittings have been disturbed, and consequently loosened. Also check mechanical supports such as Wall Straps, or plumbers' tape for rigidity.

GOLD-PLATED LOUVERS/TRIM

The 24 carat gold-plated finish on the louvers and trim requires little maintenance, and need only be cleaned with a damp cloth. DO NOT use abrasive materials or chemical cleaners, as they may harm the finish and void the warranty. Clean any finger-prints off before turning the unit on.

LOG REPLACEMENT

The unit should never be used with broken logs. Turn off the gas valve and allow the unit to cool before opening door and carefully remove the logs. (The pilot light generates enough heat to burn someone.) If for any reason a log should need replacement, you must use the proper replacement log. The position of these logs must be as shown in the diagrams under Log Installation.

Note: Improper positioning of logs may create carbon build-up and will severely alter the unit's performance which is not covered under warranty.

THERMOPILE/ THERMOCOUPLE

- 1) Open the bottom louvers.
- Loosen the thermocouple or thermopile with a 7/16" wrench.
- Disconnect thermocouple by loosening nut from the valve with a 9mm wrench. Disconnect thermopile by loosening 2 screws marked TP on the valve.
- 4) Drop the thermocouple or thermopile down from the bracket and pull it out of the unit.
- 5) Reinstall the new ones in reverse order.

GLASS GASKET

If the glass gasket requires replacement use 5/8" flat glass gasket for the Bay Front (Part # 936-243) and a tadpole glass gasket for the Flush Front (Part # 936-155).

DOOR GLASS

Your Regency® fireplace is supplied with high temperature, 5 mm Neoceram ceramic glass that will withstand the highest heat that your unit will produce. If your glass requires cleaning, we recommend using an approved glass cleaner available at all authorized dealers. Do not use abrasive materials. Do not clean the glass when hot.

In the event that you break your glass by impact, purchase your replacement from an authorized Regency® dealer only, and follow our step-by-step instructions for replacement.

WARNING: Do not operate the ap


pliance with the glass panels removed, cracked or broken. Replacement of the glass panels should be done by a licensed or qualified service person.



Caution: Wear gloves when removing damaged or broken glass.


Flush Glass Replacement

Remove the flush door front. Remove the 4 glass clips from each corner. Slide in the new replacement glass. Push the 4 glass clips back onto the frame. The glass must have gasketing around it.



Bay Glass Replacement

- Remove the door from the unit and place on a soft surface to prevent scratching.
- 2) Remove the nuts holding the glass clips in place and remove.
- Replace the glass. The glass must have gasketing around it.
- 5) Reverse the previous steps, replace the glass clips and fasten with the nuts but do not over tighten, as this can break the glass.
- **6)** Replace door on the Fireplace and check the seal.

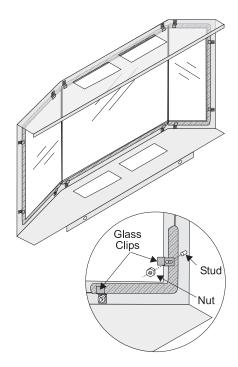

REMOVING VALVE

- 1) Shut off the gas supply.
- Remove the louvers (and bay door if it is on).
- 3) Open the flush door and remove the door.
- 4) Remove the logs.
- Remove the burner/grate assembly by removing the two Phillips head screws and then lift the burner assembly out.






Diagram 1: Remove the left and right screws and then lift out the burner/grate assembly.

- Remove the rear log stand by removing the 2 screws.
- Disconnect the inlet gas line. See diagram
 2.
- Disconnect the 2 TP wires and the 2 TH wires from the valve.
- Remove the 10 Phillips head screws securing the valve tray assembly in place (diagram 2) and then lift the entire assembly out (diagram 3).

10) Undo the pilot tube from the valve with a




Diagram 3: Lift out Valve Tray Assembly



7/16" wrench.

- **11)** Undo the quick drop out thermocouple nut on the valve with a 9mm (metric) wrench.
- **12)** Remove the Piezo igniter wire and push button assembly.
- **13)** Undo the "gas out" flare nut with a 13/16" wrench.
- **14)** Undo the "gas out" flare fitting with an 11/16" wrench.
- 15) Remove the 4 Phillips head screws from the sides of the valve bracket and remove valve.

Hint: If you are using black pipe, ensure that there is a union by the valve, otherwise removal will be almost impossible.






Diagram 2: Rear Log Stand & Valve Tray Assembly

INSTALLING VALVE

- Attach the valve to the valve bracket with the 4 (m5x8 metric) screws provided.
- 2) Reconnect the "gas out" flare fitting with an 11/16" wrench.
- Reconnect the "gas out" flare nut with a 13/16" wrench.
- Install piezo ignitor push button assembly and reconnect wire.
- 5) Reconnect the quick drop out thermocouple nut with a 9mm wrench.
- 6) Reconnect the pilot tube nut with a 7/16" wrench.
- Scrape off the old gasket from the floor of the firebox and from the valve tray assembly.
- Install a new gasket and reinstall the valve tray assembly.


Note: Failureto install a new gasket may severely affect the appliance performance.

- 9) Reinstall the 10 hold down screws.
- **10)** Hook up the 2 TP and 2 TH wires to the appropriate connections on the valve.
- 11) Reinstall the front log stand.
- 12) Install Burner/grate assembly.
- 13) Hook up the gas line and check for gas leaks with a soap and water solution or a gas leak detector. (Do not use open flame for leak testing.)
- 14) Fire up the unit temporarily.
- 15) Check the manifold pressure.
- 16) Reinstall the logs and brick panels as needed.
- 17) Close the door and replace the louvers.
- **18)** Fire up the unit again and check for proper flame appearance and glow on logs.

MAIN ASSEMBLY

| Part # | Description | Par | t# Description | | Pa | art# | Description |
|----------------|---|------------------------|---|---------------------|------------|------------|----------------------|
| 1) 948-247 | Door Handle | 432-901 | Brick Panel Set - Standard Brown | | | • | Heat Wave Duct Kit |
| 2) * | Thermodisc Bracket | 432-902 | Brick Panel Set - Standard Red | 89) 94 90) 94 | | Junction | oux Ouct Adaptor |
| 7) 910-428 | Duplex Receptacle | 432-903 | Brick Panel Set - Herringbone Brown | , | | | o Oval Adaptor |
| 8) 910-429 | Box - Receptacle | | BIOWII | 92) 94 | | | ct Adaptor |
| 9) 910-430 | Cover - Receptacle | 33) * | Brick Panel - Rear | 93) 94 | | Angle B | |
| 10) 904-687 | Clamp Connector | 34) * | Brick Panel - Left Side | , | | • | embly - HeatWave |
| 13) 948-045 | #12 Jack Chain | 35) * | Brick Panel - Right Side | / | | Option | |
| 14) 948-115 | Door Extension Spring | 36) * | Brick Panel - Top | 95) 94 | | | e - White |
| , | , 3 | 37) 430-056 | Brick Clip - Top | 96) 94 | 46-005 | Wall Ada | ptor Plate - White |
| 16) * | Thermodisc Top | 38) 430-057 | Brick Clip - Bottom | 97) 9 | 10-417 | Knob - V | Vhite |
| 17) * | Thermodisc Box Base | | | 98) 9 | 10-366 | Switch C | Cover Plate - White |
| 19) 430-129 | Receptacle Box Mount | 432-917 | Fan Assembly (120 Volts) | , | | | ed Controller |
| | | | Optional | 100) 9 ⁻ | 10-367 | | astic Switch |
| 20) 430-031 | Top Nailing Strip | | Fan Motor (120 Volts) | | | Recepta | |
| 22) 433-017 | Firebox Baffle | 432-966 | Fan Switch Assy (120 Volts) | , | | | |
| 23) 433-011F | Top Standoff | 43) 910-813 | Power Cord (120 Volts) | - | | | n 6" dia. x 24" |
| 24) 511-044 | Standoff - Side | 46) 910-330 | Fan Speed Control | 104) 69 | 90-022F | Cover P | ate |
| 790-091 | Standoff - Rear | 47) 904-586 | Knob - Speed Control | _ | 40.004 | Divid Div | |
| 26) * | Louver Hold Down | 49) 910-142 | Thermodisc - Fan Auto | | | Manual | oe Adaptor |
| 27) * | Outer Flue Collar | EO) 004 742 | ON/OFF | - | | | ion Kit - NG to LP |
| 28) * 30) * | Inner Flue Collar Assembly Gasket - Flue Collar | 50) 904-713 432-967 | U-Clip at Louver | 4. | 34-909 | Convers | IOII NIL - ING IO LP |
| 30) 31) * | Flue Mounting Plate | 432-967 63) 910-241 | Burner On/Off Switch Assy Switch - Burner On/Off | *Not av | vailahla : | as a renl: | acement part. |
| 31) | riue wounting Plate | 910-241 | Wire Harness - Valve to | ivota | valiable (| as a repi | accinent part. |


Burner

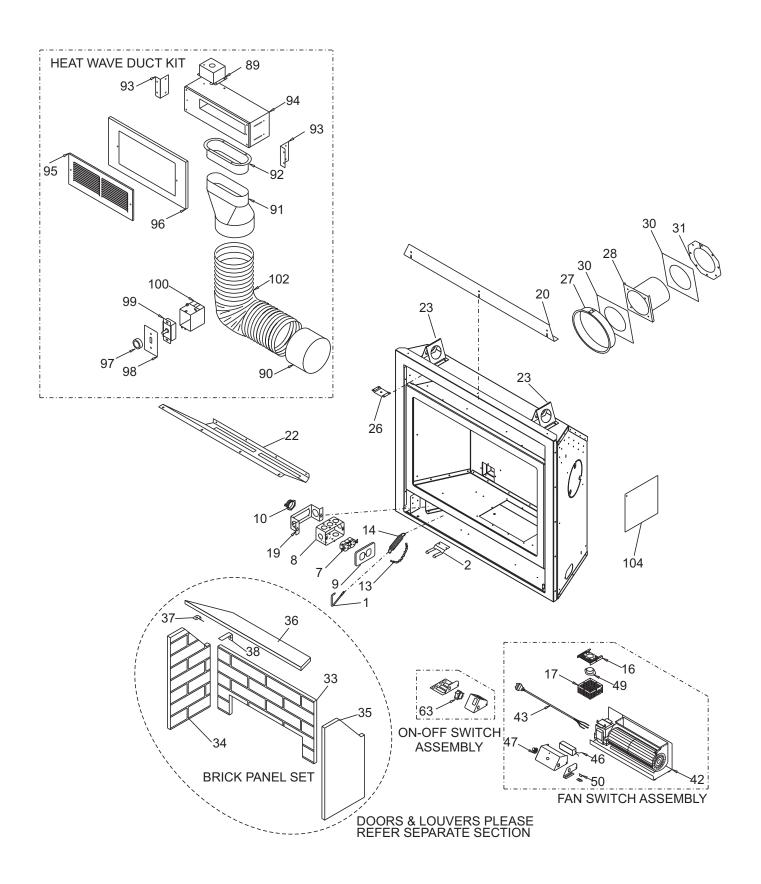

BURNER & LOG ASSEMBLY

| Part | Description |
|---|--|
| 53) 430-055 54) 910-421 55) 910-422 56) 910-190 | Gasket - Valve Access Plate - NG/LP Pilot ON/OFF Extension Knob Flame HI/LOW Extension Knob Piezo Ignitor and Nut |
| 433-574/P 433-576/P 57) 910-478 58) * 59) * 60) * 66) 910-038 910-039 904-568 904-163 936-170 67) * 68) W840470 79) 433-525 82) 433-024 83) * 85) 431-930 86) 430-097 87) 433-018 | |


^{*}Not available as a replacement part.

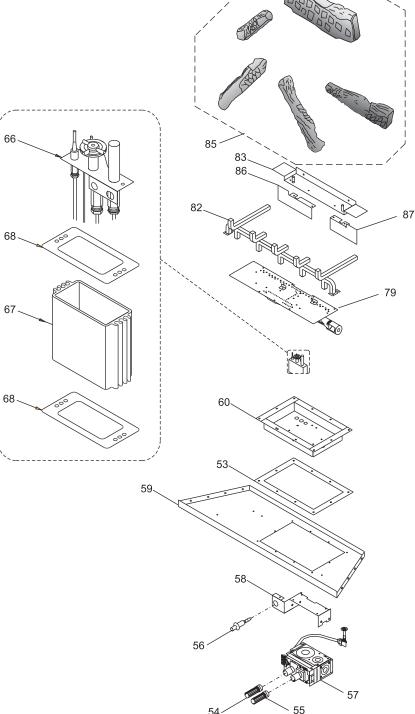

FLUSH FRONT & LOUVERS


| | Part # | Description | | Part # | Description |
|------|-----------|---|------|---------|---------------------------------------|
| 117) | 904-196 | Magnet - 1' round | | 430-940 | Finishing Trim (Set) - Black (Option) |
| 131) | 430-947 | Flush Glass Trim (set) - Brushed Steel (Option) | 157) | * | Finishing Trim Left |
| | | | 159) | * | Finishing Trim Right |
| | 430-918 | Flush Louvers (set) - Gold/Black (Option) | 158) | * | Finishing Trim Top |
| | 430-922 | Flush Louvers (set) - Black (Option) | | | |
| | 430-923 | Flush Louvers (set) - Black/Steel (Option) | | 431-943 | Double Screen Door Complete (Option) |
| 133) | * | Flush Louver Assy-Top | 171) | * | Door Frame Left Assembly |
| | 430-162 | Front Deflector | 172) | * | Door Frame Right Assembly |
| 134) | * | Flush Louver Assy-Bottom | 173) | 904-712 | U-Clip for Frame |
| | | | 174) | 430-133 | Door Handle |
| | 433-538 | Flush Door Assembly Complete | 175) | 511-084 | Door Latch |
| 135) | 940-088/P | Glass (Flush) | 178) | * | Door Support Frame Assembly |
| 137) | 904-691 | U-Clip | | 904-715 | Pushnut Fastener 3/16" |
| 139) | 936-155 | Glass Gasket (Tadpole) | | * | Screw - #8 x 1/2" |
| 140) | 948-042 | Spring Hinge - Black | | | |
| | | | 179) | 948-216 | Regency® Logo Plate |


^{*}Not available as a replacement part.

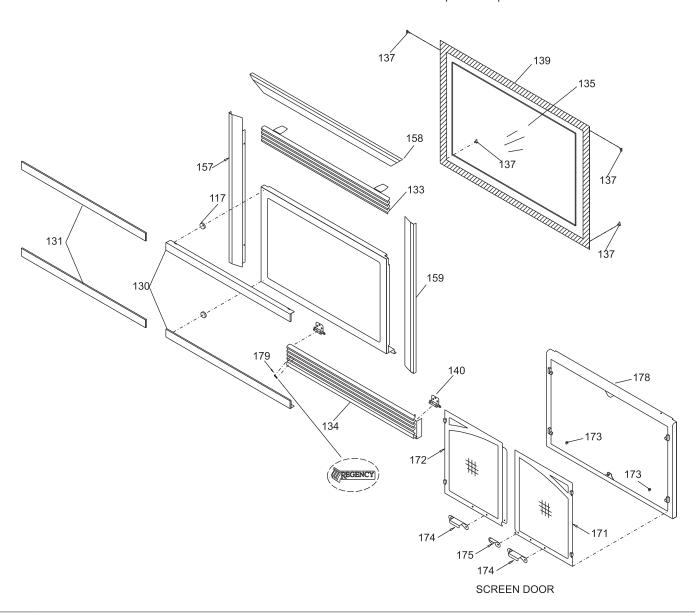

CONTEMPORARY FACEPLATE

| Part # | | Description | | | |
|--------|---|--|--|--|--|
| | | | | | |
| 1) | 434-516 434-516BL 434-516R 434-517 | Faceplate Assembly Black Faceplate Assembly Painted Blue Faceplate Assembly Painted Red Faceplate Assembly Stainless Steel | | | |
| 2) | 434-033 | Mounting Plate | | | |
| 3) | 434-514 909-924 904-925 | Faceplate Support Bracket Assembly Bumper Rubber W/Machine Screw 8-32 x 3/8" Cap Assy Brushed Stainless 3/4" diameter. | | | |
| 4) | 434-032 | Control Shield | | | |
| 5) | 434-018F | Heat Deflector | | | |
| 6) | 904-434 904-434 | Burner Orifice #47 (Natural Gas) Burner Orifice #56 (Propane Gas) | | | |

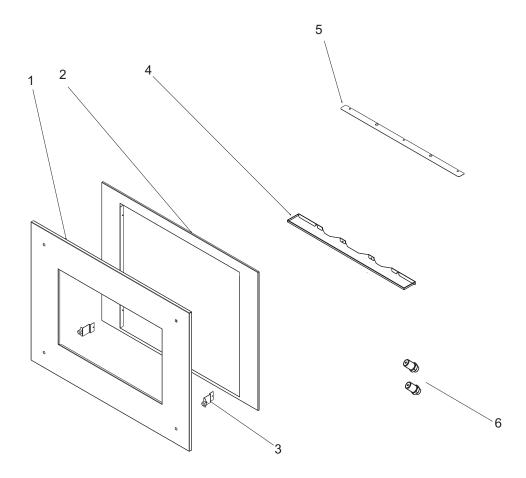

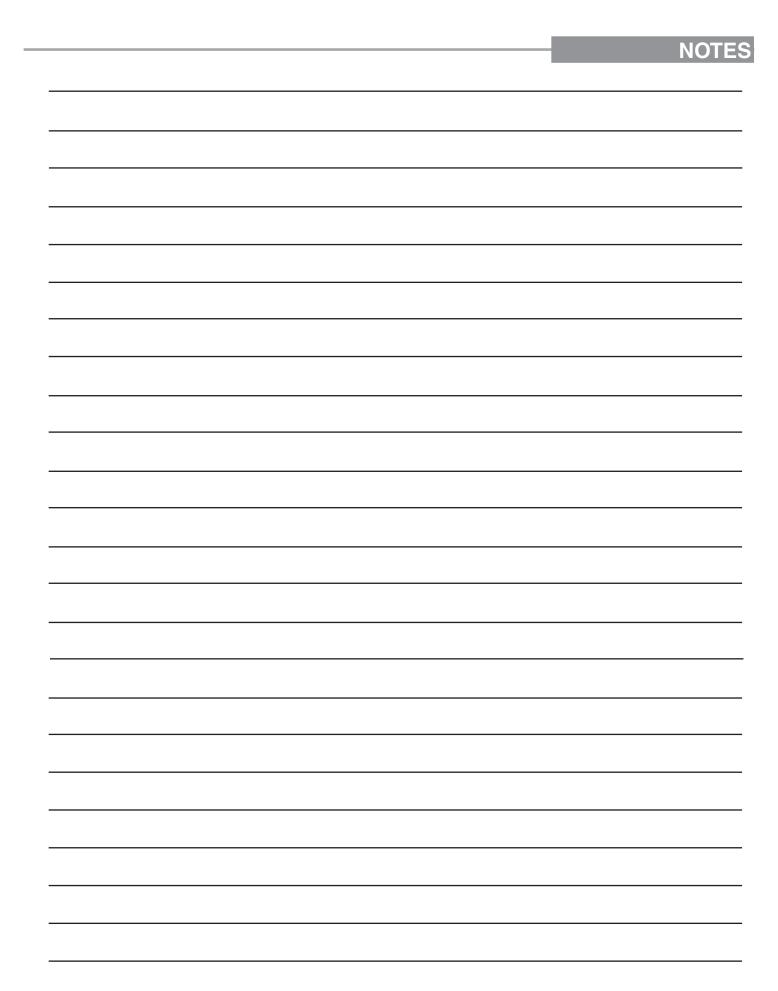

| OTES | | | |
|------|---|------|--|
| OIL3 | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| 1 | - | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



ireplace Products are designed with reliability and simplicity in mind. In addition, our internal Quality Assurance Team carefully inspec before it leaves our facility. FPI Fireplace Products International Ltd. is pleased to extend this limited lifetime warranty to the <u>original puroduct</u>. This warranty is not transferable.

ıty: Limited Lifetime

stion chamber, heat exchanger, burner tubes/pans, logs, brick panels and gold plating (against defective manufacture only) are covered under the Lir five (5) years for parts and subsidized labour* and parts only thereafter.

ered for lifetime against thermal breakage only, parts and subsidized labour* for five (5) years and parts only thereafter from date of purchase.

sting, surrounds and grills are covered against cracks and warps resulting from manufacturer defects, parts and subsidized labour* for three (3) years and parts only thereafter.

shes - One year on brushed nickel and antique copper full screens and doors. You can expect some changes in color as the product "ages" with cor FPI warranties the product for any manufacturing defects on the original product. However, the manufacturers warranty does not cover changing colo nts, etc applied after the purchase of the product. Damage from the use of abrasive cleaners is not covered by warranty.

d mechanical components such as blowers, switches, wiring, thermodiscs, FPI remote controls, spill switches, thermopiles, thermocouples, pilot assembly res are covered for two years parts and one year subsidized labour* from the date of purchase. Blowers and valves replaced under warranty are considered if new with appliance, ie. twelve (12) months from original purchase date of appliance with a minimum of three (3) months coverage from date of rep

components are covered parts and subsidized labour* for three (3) years from date of purchase.

ıra-Vent venting components (Direct Vent units) are covered by Simpson Dura-Vent Inc. warranty.

icement parts purchased by the consumer from FPI after the original coverage has expired on the unit will carry a 90 day warranty, valid with a rec to be defective will be repaired or replaced at our discretion. No labor coverage is included with these parts.

parts of this unit which in our judgement show evidence of such defects will be repaired or replaced at FPI's option, through an accredited distributor or a settive part be returned to the distributor or agent <u>Transportation Prepaid</u>, if requested.

namel - Absolute perfection is neither guaranteed nor commercially possible. Any chips must be reported and inspected by an authorized dealer within Reported damage after this time will be subject to rejection.

eral practice of FPI to charge for larger, higher priced replacement parts and issue credit once the replaced component has been returned to FPI ϵ turer defect.

zed selling dealer is responsible for all in-field service work carried out on your Regency product. FPI will not be liable for results or costs of works d service persons or dealers.

FPI reserves the right to inspect product in the field which is claimed to be defective.

sust be submitted to FPI by authorized selling dealers. It is essential that all submitted claims provide all of the necessary information including cut ate, serial #, type of unit, problem, and part or parts requested, without this information the warranty will be invalid.

Lifetime Warranty does not extend to or include paint, door or glass gasketing or trim.

ill FPI be liable for any consequential damages which exceed the purchase price of the unit. FPI has no obligation to enhance or modify any unit once n cts evolve, field modifications or upgrades will not be performed.

be liable for travel costs for service work.

and environmental problems are not the responsibility of the manufacturer and therefore are not covered under the terms of this warranty policy.

kwool, gaskets, door handles and paint are not covered under the terms of this warranty policy.

ich shows signs of neglect or misuse is not covered under the terms of this warranty policy.

y will not extend to any part which has been tampered with or altered in any way, or in our judgment has been subject to misuse, improper installatio spillage or downdrafts caused by environmental or geographical conditions, inadequate ventilation, excessive offsets, negative air pressure caused be a furnaces, fans, clothes dryer, etc.

age to stoves and replacement parts is not covered by warranty and is subject to a claim against the freight carrier by the dealer

Register your Regency® warranty online www.regency-fire.com

Reasons to register your product online today!

- View and modify a list of all your registered products.
- Request automatic email notification of new product updates.
- Stay informed about the current promotions, events, and special offers on related products.

| Installer: Please complete the following information | | | | | | |
|--|---|--|--|--|--|--|
| Dealer Name & Address: | | | | | | |
| Installer:Phone #: | - | | | | | |
| Date Installed: | - | | | | | |
| Serial No.: | - | | | | | |