WIRING DIAGRAM MANUAL Split System Heat Pump

N4H4, R4H4, WCH4

Safety Labeling and Signal Words

DANGER, WARNING, CAUTION, and NOTE

The signal words **DANGER**, **WARNING**, **CAUTION**, and **NOTE** are used to identify levels of hazard seriousness. The signal word **DANGER** is only used on product labels to signify an immediate hazard. The signal words **WARNING**, **CAUTION**, and **NOTE** will be used on product labels and throughout this manual and other manuals that may apply to the product.

DANGER – Immediate hazards which **will** result in severe personal injury or death.

WARNING – Hazards or unsafe practices which **could** result in severe personal injury or death.

CAUTION – Hazards or unsafe practices which **may** result in minor personal injury or product or property damage.

NOTE – Used to highlight suggestions which **will** result in enhanced installation, reliability, or operation.

Signal Words in Manuals

The signal word **WARNING** is used throughout this manual in the following manner:

WARNING

The signal word **CAUTION** is used throughout this manual in the following manner:

A CAUTION

Signal Words on Product Labeling

Signal words are used in combination with colors and/or pictures on product labels.

TABLE OF CONTENTS

339697-101 Wiring Diagram	. 2
339701-101 Wiring Diagram	. 3
339903-101 Wiring Diagram	. 4
339904-101 Wiring Diagram	. 5
Expanded Model List	6

MODELS

208/230-1-60
N4H4
R4H4
WCH4

WARNING

DEATH, PERSONAL INJURY, AND/OR PROPERTY DAMAGE HAZARD


Failure to carefully read and follow this warning could result in equipment malfunction, property damage, personal injury and/or death.

Installation or repairs made by unqualified persons could result in equipment malfunction, property damage, personal injury and/or death.

The information contained in this manual is intended for use by a qualified service technician familiar with safety procedures and equipped with the proper tools and test instruments.

Installation must conform with local building codes and with the National Electrical Code NFPA70 current edition or Canadian Electrical Code Part 1 CSA C.22.1.

1-Phase 339697-101

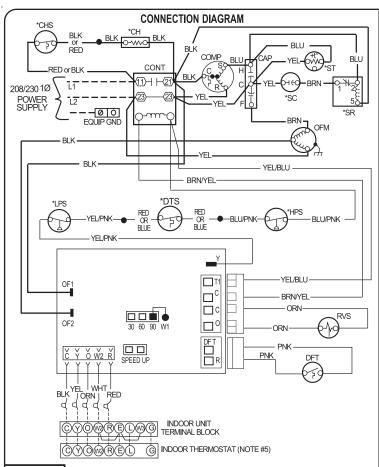

LEGEND I

	FACTORY POWER WIRING	*CHS	CRANKCASE HEATER SWITCH
	FACTORY CONTROL WIRING	COMP	COMPRESSOR
	FIELD CONTROL WIRING	CONT	CONTACTOR
	FIELD POWER WIRING	DFT	DEFROST THERMOSTAT
_	CONDUCTOR ON CIRCUIT BOARD	DR	DEFROST RELAY AND CIRCUITRY
0	COMPONENT CONNECTION	*DTS	DISCHARGE TEMP SWITCH
	1/4-IN QUICK CONNECT TERMINAL	*HPS	HIGH PRESSURE SWITCH
只	FIELD SPLICE	*LPS	LOW PRESSURE SWITCH
-	JUNCTION	OFM	OUTDOOR FAN MOTOR
$\prec \leftarrow$	PLUG RECEPTACLE	RVS	REVERSING VALVE SOLENOID
CB	CIRCUIT BOARD	*SC	START CAPACITOR
CAP	CAPACITOR (CUAL RUN)	*SR	START RELAY
*CH	CRANKCASE HEATER	*ST	START THERMISTOR

*CHS	CRANKCASE HEATER SWITCH
COMP	COMPRESSOR

* MAY BE FACTORY OR FIELD INSTALLED

NOTES:


- Symbols are electrical representation only. Compressor and fan motor furnished with inherent thermal protection.
- To be wired in accordance with National Electric N.E.C. and local codes. N.E.C. class 2, 24 V circuit, min. 40 VA required, 60 VA on units installed with LLS.

- Use copper conductors only. Use conductors suitable for at least 75°C (167°F). Must use thermostat and sub-base as stated in pre-sale literature. If indoor section has a transformer with a grounded secondary, connect the grounded
- side to "C" on the circuit board. If any of the original wire, as supplied, must be replaced, use the same
- Check all electrical connections inside control box for tightness.
- Do not attempt to operate unit until service valves have been opened

Use conductors suitable for at least 75°C (167°F).

339697-101 REV. B





60 MIN. ACCELERATED TO 14 SEC.
30 MIN. ACCELERATED TO 7 SEC.
DEFROST CYCLE: 10 MIN. ACCELERATED TO 2 SEC.

CONDENSING UNIT CHARGING INSTRUCTIONS For use with units using R-410A refrigerant

For use with units using R									
REQUIRE) Liqu	JID LII	NE TE	MPER	ATUF	Æ	Г		
Liquid Pressure at Service			ed S perat		olin (°F)	g			
Valve (psig)	6	8	10	12	14	16	ı		
251	78	76	74	72	70	68			
259	80	78	76	74	72	70			
266	82	80	78	76	74	72			
274	84	82	80	78	76	74			
283	86	84	82	80	78	76			
291	88	86	84	82	80	78			
299	90	88	86	84	82	80			
308	92	90	88	86	84	82			
317	94	92	90	88	86	84			
326	96	94	92	90	88	86			
335	98	96	94	92	90	88			
345	100	98	96	94	92	90			
354	102	100	98	96	94	92			
364	104	102	100	98	96	94			
374	106	104	102	100	98	96			
384	108	106	104	102	100	98			
395	110	108	106	104	102	100			
406	112	110	108	106	104	102			
416	114	112	110	108	106	104			
427	116	114	112	110	108	106			
439	118	116	114	112	110	108			
450	120	118	116	114	112	110			
462	122	120	118	116	114	112			
474	124	122	120	118	116	114			
						A I I T			

COOLING ONLY CHARGING PROCEDURE


- 1. Only use sub cooling charging method when OD ambient is greater than 70°F and less than 100°F, indoor temp is greater than 70°F and less than 80°F, and line set is less than 80 ft.
- 2. Operate unit a minimum of 15 minutes before checking the charge.
- 3. Measure liquid service valve pressure by attaching an accurate gauge to the service port.
- 4. Measure the liquid line temperature by attaching an accurate thermistor type or electronic thermometer to the liquid line near the outdoor coil.
- 5. Refer to unit rating plate for required subcooling temperature.
- 6. Find the point where the required subcooling temperature intersects the measured liquid service valve pressure.
- 7. To obtain the required subcooling temperature at specific liquid line pressure, add refrigerant if liquid line temperature is higher than indicated. When adding refrigerant, charge in liquid form using a flow restricting device into suction service port. Recover refrigerant if temperature is lower. Allow a tolerance of +/- 3°F


A CAUTION

- Compressor damage may occur if system is over charged. This unit is factory charged with R-410A in accordance with the amount shown on the rating plate. The charge is adequate for most systems using matched coils and tubing not over 15 feet long. Check refrigerant charge for maximum efficiency. See Product Data Literature for required Indoor air Flow Rates and for use of line lengths over 15 feet.
- Relieve pressure and recover all refrigerant before system repair or final disposal. Use all service ports and open all flow-control devices, including solenoid valves
- Never vent refrigerant to atmosphere. Use approved recovery equipment



1-Phase 339701-101

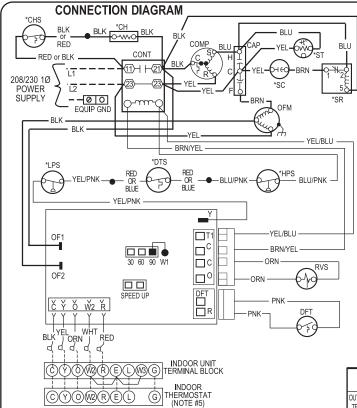



CONDENSING UNIT CHARGING INSTRUCTIONS For use with units using R-410A refrigerant

TABLE I - SUPERHEAT CHARGING TABLE (SUPERHEAT °F AT LOW-SIDE SERVICE PORT) EVAPORATOR ENTERING AIR ° F WB

	IOU IDOOK		_		OIL	~	,, r		-17117	0 7			ъ.		- 1	
	TEMP°F	50	52	54	56	58	60	62	64	67	68	70	72	74	76	12
7	55	11	11	12	12	12	13	17	20	24	24	25	25	25	25	Г
	60	6	6	7	7	7	7	12	16	21	22	23	23	23	23	١.
	65						3	7	12	18	19	21	21	22	22	3
	70								7	14	16	18	20	20	20	L
	75								3	11	13	16	18	18	19	L
	82									*6	8	12	15	16	17	4
	85									4	7	11	14	15	16	L
	90										4	8	12	14	15	5
	95											6	10	12	14	L
	100											4	8	11	12	6
	105										÷	3	6	9	11	Г
	110												5	7	10	L
	115												3	6	8	L

Where a dash (--) appears do not attempt to charge system under these conditions or refrigerant slugging may occur. Charge must be weighed in. Note: Superheat °F is at low-side service port, allow a tolerance of +/- 3 °F Note: Indoor of by bulb between 70 °F and 80 °F of polimum performance point, 82 °F outdoor ambient and (80 °F dry bulb), (67 °F wet bulb) indoor conditions. (DOE B Test Conditions)

TABLE II - REQUIRED SUCTION TUBE TEMPERATURE °F (MEASURED AT LOW-SIDE SERVICE PORT)

SUPERHEAI	St	SUCTION PRESSURE AT SERVICE PORT PSIG.										
TEMP. °F	108	112	117	121	126	131	139	141	146	l٤		
0	35	37	39	41	43	45	47	49	51	ľ		
2	37	39	41	43	45	47	49	51	53	ı		
4	39	41	43	45	47	49	51	53	55	ı		
6	41	43	45	47	49	51	53	55	57	9		
8	43	45	47	49	51	53	55	57	59	ı		
10	45	47	49	51	53	55	57	59	61	ı		
12	47	49	51	53	55	57	59	61	63	I,		
14	49	51	53	55	57	59	61	63	65	ľ		
16	51	53	55	57	59	61	63	65	67	ı		
18	53	55	57	59	61	63	65	67	69	l		
20	55	57	59	61	63	65	67	69	71	ľ		
22	57	59	61	63	65	67	69	71	73	ı		
24	59	61	63	65	67	69	71	73	75	ı		
26	61	63	65	67	69	71	73	75	77	1		
28	63	65	67	69	71	73	75	77	79	ı		
30	65	67	69	71	73	75	77	79	81	ı		

COOLING ONLY CHARGING PROCEDURE

- Operate unit a minimum of 10 minutes
- before checking charge.

 Measure suction pressure by attaching an accurate gage to suction valve service port.
- Measure suction temperature by attaching an accurate thermistor type or electronic thermometer to the suction line at service valve.
- Measure outdoor air dry-bulb temperature with a thermometer.
 Measure indoor air (entering indoor
- coil) wet-bulb temperature with a sling
- psychrometer.

 Refer to Table I. Find outdoor temperature and evaporator entering air wet-bulb temperature. At this air wet-bulb temperature. At this intersection, note superheat. Where a dash (--) appears on table do not attempt to charge system under these conditions or refrigerant slugging may occur. Charge must be weighed in, adding or removing 0.6 oz/ft of 3/8 liquid line above or below 15 ft. respectively. respectively.

 Refer to Table || Find superheat
- temperature located in step 6 and suction pressure. At this intersection note suction line temperature. If unit has a higher suction line temperature than charted temperature, add refrigerant until charted
- temperature is reached.

 9. If unit has a lower suction line temperature than charted temperature, remove and recover refrigerant until charted temperature is reached.
- When adding refrigerant, charge in liquid form into the suction service port using a flow-restricting device.

 If outdoor air temperature or pressure
- at suction valve changes, charge to new suction line temperature indicated on chart. 12. This procedure is valid when indoor air
- flow is within +/- 21% of its rated cfm

-LEGEND-

FACTORY POWER WIRING

FIELD POWER WIRING

FACTORY CONTROL WIRING

FIELD CONTROL WIRING

CONDUCTOR ON CIRCUIT BOARD

0 COMPONENT CONNECTION

1/4-IN QUICK CONNECT TERMINALS

H FIELD SPLICE JUNCTION

CAP CAPACITOR *CH CRANKCASE HEATER *CHS CRANKCASE HEATER SWITCH COMP COMPRESSOR

CONT CONTACTOR СВ CIRCUITBOARD **DEFROST THERMOSTAT** DFT DR DEFROST RELAY & CIRCUITRY *DTS DISCHARGE TEMP. SWITCH *HPS HIGH PRESSURE SWITCH

*LLS LIQUID LINE SOLENOID VALVE *LPS LOW PRESSURE SWITCH OFM **OUTDOOR FAN MOTOR RVS** REVERSING VALVE SOLENOID *SC START CAPACITOR

*SR START RELAY *ST START THERMISTOR

* MAY BE FACTORY OR FIELD INSTALLED

NOTES:

- 1. Compressor and fan motor furnished with inherent thermal protection.
- To be wired in accordance with National Electric Code (N.E.C.) and local codes.

 N.E.C. class 2, 24V circuit, min. 40 VA required,
- 60 VA on units installed with LLS.
 Use copper conductors only, from disconnect to unit.
- Must use thermostat and sub-base as stated
- in pre-sale literature.

 6. If indoor section has a transformer with a
- grounded secondary, connect the grounded side to "C" on the circuit board. If any of the original wire, as supplied, must
- be replaced, use the same or equivalent wire. Check all electrical connections inside control box for tightness.
- Do not attempt to operate unit until service valves have been opened.

 10. Use conductors suitable for at least 75°C (167°F).

CAUTION

1. Compressor damage may occur if system is

- over charged.


 2. This unit is factory charged with R-410A in accordance with the amount shown on the rating plate. The charge is adequate for most systems using matched coils and tubing not over 15 feet long. Check refrigerant charge for maximum efficiency. See Product Data Literature for required Indoor air Flow Rates and for use of line lengths over 15 feet.
- Relieve pressure and recover all refrigerant before system repair or final disposal. Use all service ports and open all flow-control devices including solenoid valves.
- Never vent refrigerant to atmosphere. Use approved recovery equipment.



3

339701-101 REV. B

1-Phase 339903-101

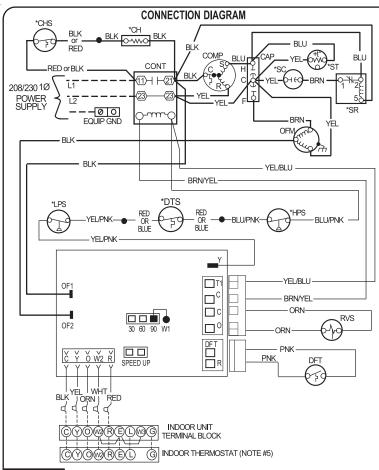

LEGEND |

FACTORY POWER WIRING *CHS CRANKCASE HEATER SWITCH FACTORY CONTROL WIRING COMP COMPRESSOR ----- FIELD CONTROL WIRING CONT CONTACTOR FIELD POWER WIRING DFT DEFROST THERMOSTAT CONDUCTOR ON CIRCUIT BOARD DEFROST RELAY AND CIRCUITRY DR 0 COMPONENT CONNECTION *DTS DISCHARGE TEMP SWITCH HIGH PRESSURE SWITCH 1/4-IN QUICK CONNECT TERMINAL *HPS \mathcal{A} FIELD SPLICE *LPS LOW PRESSURE SWITCH JUNCTION OFM **OUTDOOR FAN MOTOR** PLUG RECEPTACLE REVERSING VALVE SOLENOID **RVS** CB CIRCUIT BOARD *SC START CAPACITOR CAP CAPACITOR (CUAL RUN) *SR START RELAY CRANKCASE HEATER START THERMISTOR *ST

* MAY BE FACTORY OR FIELD INSTALLED

NOTES:


- Symbols are electrical representation only.
- Compressor and fan motor furnished with inherent thermal protection.

 To be wired in accordance with National Electric N.E.C. and local codes.

 N.E.C. class 2, 24 V circuit, min. 40 VA required, 60 VA on units installed with LLS.
- Use copper conductors only. Use conductors suitable for at least 75°C (167°F). Must use thermostat and sub-base as stated in pre-sale literature.
- If indoor section has a transformer with a grounded secondary, connect the grounded
- side to "C" on the circuit board.
- If any of the original wire, as supplied, must be replaced, use the same or equivalent wire.
- Check all electrical connections inside control box for tightness.

 Do not attempt to operate unit until service valves have been opened.
- 12. Use conductors suitable for at least 75°C (167°F).

339903-101 REV, A



30 BETWEEN DEFROST CYCLES (MINUTES)

SPEED JUMPERED TEST PINS (USE METAL OBJECT), FIELD SPEED-UP CYCLE HEAT CYCLE: 90 MIN, ACCELERATED TO 21 SEC

60 MIN. ACCELERATED TO 14 SEC. 30 MIN. ACCELERATED TO 7 SEC. DEFROST CYCLE: 10 MIN. ACCELERATED TO 2 SEC.

CONDENSING UNIT CHARGING INSTRUCTIONS For use with units using R-410A refrigerant

	FUI	use	VVILI	unn	s us	siriy	<u>.</u>			
REQUIRE) LIQI	JID LII	NE TE	MPER	ATUF	RE	Γ			
Liquid Pressure		Required Subcooling								
at Service Valve (psig)	-	Temperature (°F)								
valve (psig)	6	8	10	12	14	16				
251 259 266 274	78 80 82 84	76 78 80 82	74 76 78 80	72 74 76 78	70 72 74 76	68 70 72 74				
283 291 299 308	86 88 90 92	84 86 88 90	82 84 86 88	80 82 84 86	78 80 82 84	76 78 80 82				
317 326 335 345	94 96 98 100	92 94 96 98	90 92 94 96	88 90 92 94	86 88 90 92	84 86 88 90				
354 364 374 384	102 104 106 108	100 102 104 106	98 100 102 104	96 98 100 102	94 96 98 100	92 94 96 98				
395 406 416 427	110 112 114 116	108 110 112 114	106 108 110 112	104 106 108 110	102 104 106 108	100 102 104 106				
439 450 462 474	118 120 122 124	116 118 120 122	114 116 118 120	112 114 116 118	110 112 114 116	108 110 112 114				

COOLING ONLY CHARGING PROCEDURE

- 1. Only use sub cooling charging method when OD ambient is greater than 70°F and less than 100°F, indoor temp is greater than 70°F and less than 80°F, and line set is less than 80 ft.
- 2. Operate unit a minimum of 15 minutes
- before checking the charge.


 3. Measure liquid service valve pressure by attaching an accurate gauge to the service port.
- 4. Measure the liquid line temperature by attaching an accurate thermistor type or electronic thermometer to the liquid line near the outdoor coil.
- 5. Refer to unit rating plate for required subcooling temperature.
- 6. Find the point where the required subcooling temperature intersects the measured liquid service valve pressure.
- 7. To obtain the required subcooling temperature at specific liquid line pressure, add refrigerant if liquid line temperature is higher than indicated. When adding refrigerant, charge in liquid form using a flow restricting device into suction service port. Recover refrigerant if temperature is lower. Allow a tolerance of +/- 3°F


A CAUTION

- Compressor damage may occur if system is over charged.
 This unit is factory charged with R-410A in accordance with the amount shown on the rating plate. The charge is adequate for most systems using matched coils and tubing not over 15 feet long. Check refrigerant charge for maximum efficiency. See Product Data Literature for required Indoor air Flow Rates and for use of line lengths over 15 feet.
- Relieve pressure and recover all refrigerant before system repair or final disposal. Use all service ports and open all flow-control devices, including solenoid valves
- Never vent refrigerant to atmosphere. Use approved recovery equipment



1-Phase 339904-101

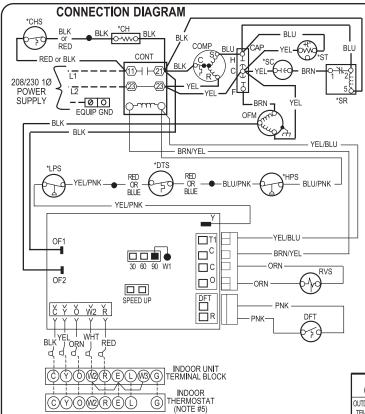

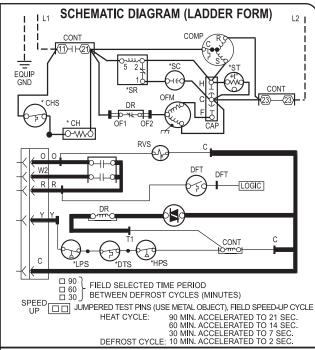

CONDENSING UNIT CHARGING INSTRUCTIONS For use with units using R-410A refrigerant

TABLE I - SUPERHEAT CHARGING TABLE (SUPERHEAT °F AT LOW-SIDE SERVICE PORT) EVAPORATOR ENTERING AIR ° F WB

TOU I DOUGH															
TEMP°F	50	52	54	56	58	60	62	64	67	68	70	72	74	76	2.
55	11	11	12	12	12	13	17	20	24	24	25	25	25	25	
60	6	6	7	7	7	7	12	16	21	22	23	23	23	23	Ĺ
65						3	7	12	18	19	21	21	22	22	3.
70								7	14	16	18	20	20	20	ı
75								3	11	13	16	18	18	19	ı
82									*6	8	12	15	16	17	4.
85									4	7	11	14	15	16	٦
90										4	8	12	14	15	5.
95											6	10	12	14	ı
100											4	8	11	12	6.
105	-										3	6	9	11	Ľ
110												5	7	10	ı
115												3	6	8	ı

Where a dash (--) appears do not attempt to charge system under these conditions or refrigerant slugging may occur. Charge must be weighed in. Note: Superheat °F is at low-side service port, allow a tolerance of +/- 3 °F Note: Indoor dry bulb between 70 °F and 80 °F ° optimum performance point, 82 °F outdoor ambient and (80 °F dry bulb), (67 °F wet bulb) indoor conditions. (DOE B Test Conditions)

TABLE II - REQUIRED SUCTION TUBE TEMPERATURE °F (MEASURED AT LOW-SIDE SERVICE PORT)

SUPERHEAT	SI	JCTIO	N PRE	SSUR	E AT	SERVI	CE PC	RT P	SIG.	ı
TEMP. °F	108	112	117	121	126	131	139	141	146	8
0	35	37	39	41	43	45	47	49	51	ľ
2	37	39	41	43	45	47	49	51	53	ı
4	39	41	43	45	47	49	51	53	55	ı
6	41	43	45	47	49	51	53	55	57	9
8	43	45	47	49	51	53	55	57	59	ı
10	45	47	49	51	53	55	57	59	61	ı
12	47	49	51	53	55	57	59	61	63	1
14	49	51	53	55	57	59	61	63	65	ľ
16	51	53	55	57	59	61	63	65	67	ı
18	53	55	57	59	61	63	65	67	69	1
20	55	57	59	61	63	65	67	69	71	Г
22	57	59	61	63	65	67	69	71	73	ı
24	59	61	63	65	67	69	71	73	75	ı
26	61	63	65	67	69	71	73	75	77	1:
28	63	65	67	69	71	73	75	77	79	ı
30	65	67	69	71	73	75	77	79	81	

COOLING ONLY CHARGING PROCEDURE

- Operate unit a minimum of 10 minutes before checking charge.
- Measure suction pressure by attaching an accurate gage to suction valve service port.
- Measure suction temperature by attaching an accurate thermistor type or electronic thermometer to the suction line at service valve.
- Measure outdoor air dry-bulb temperature with a thermometer. Measure indoor air (entering indoor coil) wet-bulb temperature with a sling
- psychrometer.

 Refer to Table I. Find outdoor temperature and evaporator entering air wet-bulb temperature. At this air wel-bulb temperature. At this intersection, note superheat. Where a dash (--) appears on table do not attempt to charge system under these conditions or refrigerant slugging may occur. Charge must be weighed in, adding or removing 0.6 oz/ft of 3/8 liquid line above or below 15 ft.
- respectively.

 Refer to Table II. Find superheat temperature located in step 6 and suction pressure. At this intersection note suction line temperature.

 If unit has a higher suction line temperature than charted temperature, add refrigerant until charted temperature is reached. If unit has a lower suction line temperature than charted temperature,
- remove and recover refrigerant until charted temperature is reached.

 10. When adding refrigerant, charge in liquid form into the suction service port
- using a flow-restricting device.

 1. If outdoor air temperature or pressure at suction valve changes, charge to new suction line temperature indicated
- This procedure is valid when indoor air flow is within +/- 21% of its rated cfm

-LEGEND-

- FACTORY POWER WIRING
- FIELD POWER WIRING
- FACTORY CONTROL WIRING
- FIELD CONTROL WIRING
- CONDUCTOR ON CIRCUIT BOARD 0 COMPONENT CONNECTION
- 1/4-IN QUICK CONNECT TERMINALS

A FIELD SPLICE

JUNCTION CAP CAPACITOR *CH **CRANKCASE HEATER** *CHS CRANKCASE HEATER SWITCH

COMP COMPRESSOR CONTACTOR CONT **CIRCUIT BOARD** CB

DEFROST THERMOSTAT DFT DEFROST RELAY & CIRCUITRY DR DISCHARGE TEMP. SWITCH *DTS HIGH PRESSURE SWITCH *HPS LIQUID LINE SOLENOID VALVE *LLS *LPS LOW PRESSURE SWITCH

OFM OUTDOOR FAN MOTOR RVS REVERSING VALVE SOLENOID START CAPACITOR *SC *SR START RELAY

START THERMISTOR *MAY BE FACTORY OR FIELD INSTALLED

*ST

NOTES:

- 1. Compressor and fan motor furnished with inherent thermal protection.
- To be wired in accordance with National Electric Code (N.E.C.) and local codes. N.E.C. class 2, 24V circuit, min. 40 VA required, 3.
- 60 VA on units installed with LLS.
 Use copper conductors only, from disconnect to unit.
- Must use thermostat and sub-base as stated in pre-sale literature.

 6. If indoor section has a transformer with a
- grounded secondary, connect the grounded side to "C" on the circuit board.
- If any of the original wire, as supplied, must be replaced, use the same or equivalent wire.
 Check all electrical connections inside control
- box for tightness.
- Do not attempt to operate unit until service valves have been opened. 10. Use conductors suitable for at least 75°C (167°F).

CAUTION

 Compressor damage may occur if system is over charged.

2. This unit is factory charged with R-410A in accordance with the amount shown on the rating plate. The charge is adequate for most systems using matched coils and tubing not over 15 feet long. Check refrigerant charge for maximum efficiency. See Product Data Literature for required Indoor air Flow Rates and for use of line lengths over 15 feet.

Relieve pressure and recover all refrigerant before system repair or final disposal. Use all service ports and open all flow-control devices, including solenoid valves.

Never vent refrigerant to atmosphere. Use approved recovery equipment.



339904-101 REV. A

	EXPANDED TABLE												
DIAGRAM	MODEL	DIAGRAM	MODEL	DIAGRAM	MODEL								
339697-101	N4H418GKF100	339904-101	R4H418GKA100	339697-101	R4H460GKA110								
339697-101	N4H418GKF200	339904-101	R4H418GKB100	339697-101	R4H460GKA210								
339697-101	N4H418GKG101	339904-101	R4H424AKB100	339903-101	R4H460GKB100								
339697-101	N4H424GKF100	339701-101	R4H424AKB101	339904-101	WCH4184GKA100								
339697-101	N4H424GKF200	339904-101	R4H424GKA100	339904-101	WCH4184GKB100								
339701-101	N4H424GKG101	339904-101	R4H424GKB100	339904-101	WCH4244GKA100								
339697-101	N4H430GKF100	339701-101	R4H424GKB101	339904-101	WCH4244GKB100								
339697-101	N4H430GKF200	339904-101	R4H430AKB100	339701-101	WCH4244GKB101								
339697-101	N4H430GKG101	339904-101	R4H430GKA100	339904-101	WCH4304GKA100								
339697-101	N4H436GKF200	339904-101	R4H430GKB100	339904-101	WCH4304GKB100								
339697-101	N4H436GKG101	339904-101	R4H436AKB100	339904-101	WCH4364GKA100								
339697-101	N4H437GKG101	339904-101	R4H436GKA100	339904-101	WCH4364GKB100								
339697-101	N4H442GKF100	339904-101	R4H436GKB100	339904-101	WCH4374GKB100								
339697-101	N4H442GKF200	339904-101	R4H437AKB100	339904-101	WCH4424GKA100								
339697-101	N4H442GKG101	339904-101	R4H437GKB100	339904-101	WCH4424GKB100								
339697-101	N4H448GKF100	339904-101	R4H442AKB100	339904-101	WCH4484GKA100								
339697-101	N4H448GKF200	339904-101	R4H442GKA100	339904-101	WCH4484GKB100								
339697-101	N4H448GKG101	339904-101	R4H442GKB100	339697-101	WCH4604GKA110								
339697-101	N4H460GKF100	339904-101	R4H448AKB100	339697-101	WCH4604GKA210								
339697-101	N4H460GKF200	339904-101	R4H448GKA100	339903-101	WCH4604GKB100								
339697-101	N4H460GKG101	339904-101	R4H448GKB100										
339904-101	R4H418AKB100	339903-101	R4H460AKB100										