


# SAFE-T-SWITCH® MODEL SS3



File #: E209344

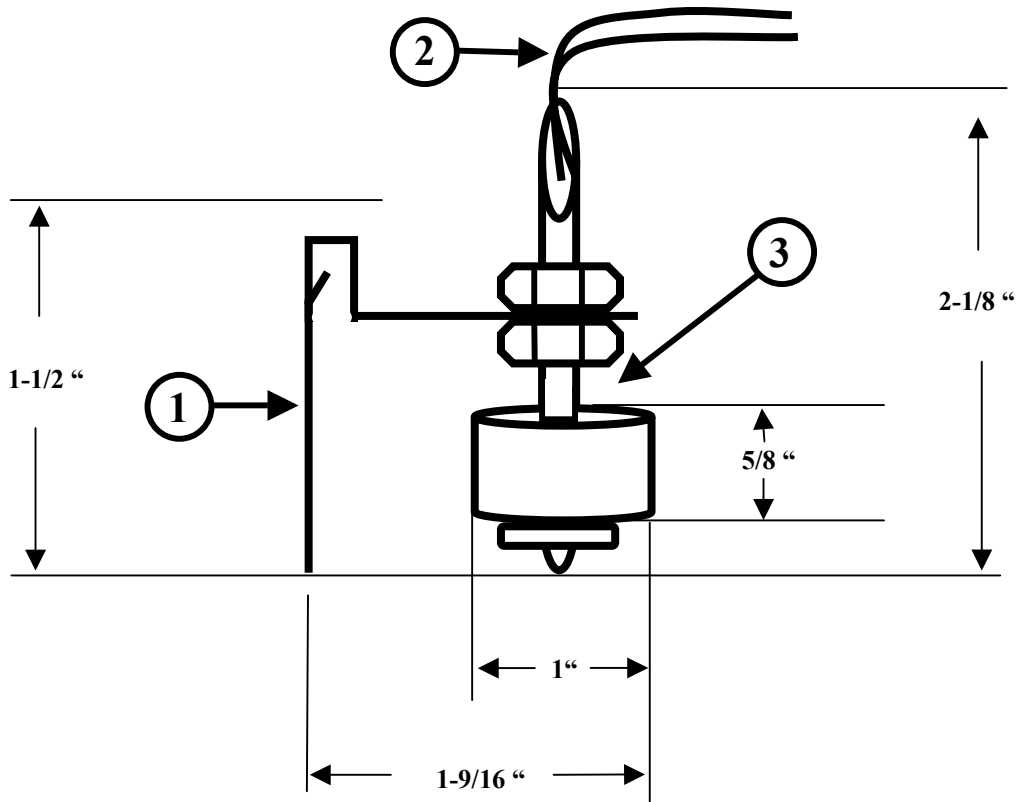

## RECTORSEAL

2601 Spenwick Dr.  
Houston, TX 77055  
TEL #: 713-263-8001 or 800-231-3345  
FAX: 713-263-7577 or 800-441-0051  
[www.rectorseal.com](http://www.rectorseal.com)

### PART NAME:

**MODEL SS3 A/C CONDENSATE  
PAN OVERFLOW SWITCH**

### TOLERANCES: (EXCEPT WHERE NOTED)

.XX ± .020  
.XXX ± .005  
.XXXX ± .0005  
ANG. ± ½ °

### SCALE:

NONE

### DRAWN BY:

MTB

### DATE:

12/4/06

### DRAWING #:

SS1

### APPROVED BY:

SPO

### REVISION:

**B**



**1** Stainless Steel Clip/Bracket



**2** 72"-Inch, 18AWG Cables  
(Pre-wired/ Potted)



**3** Electrically Potted Reed/Magnet  
Switch Assembly

### COMMENTS / REQUIREMENTS:

- ◆ Minimum Pan Depth: 1-1/2 Inch. Adjusts for deeper pans
- ◆ Sensitivity: ¼-inch rise in float opens switch
- ◆ Potted, water sealed reed/magnet switch design
- ◆ Conforms to UL 508
- ◆ 1.25 Amp switching capacity
- ◆ 24 Volts A/C Class 2