
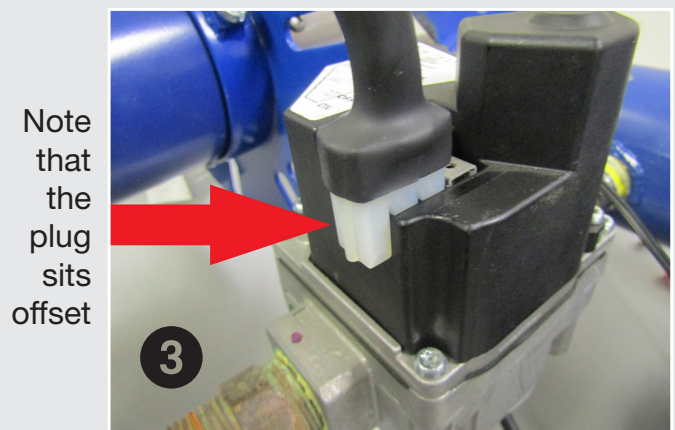
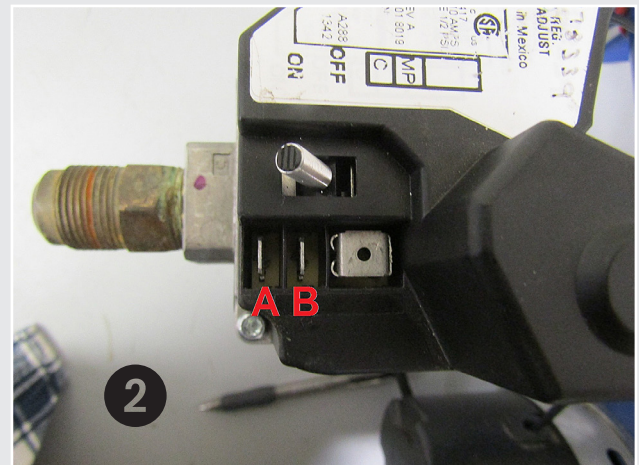


All EZGas Pro burners manufactured before date 06-01-2019 are equipped with a harness for a Honeywell gas valve. The following are steps to retrofit the existing Honeywell harness to the White Rogers valve in this kit.

**WARNING** Installer/servicer – Except where specifically stated otherwise, this Supplement must be used only by a **qualified service technician**. Follow all guidelines in the Burner Manual and Boiler Manual. Failure to comply with this or other requirements in this manual could result in severe personal injury, death or substantial property damage.

### Option 1

Plug the existing Honeywell harness **1** into the compatible slots on the White Rogers valve **2**. Note that plug will sit offset. The offset section is empty and contains no wiring **3**.

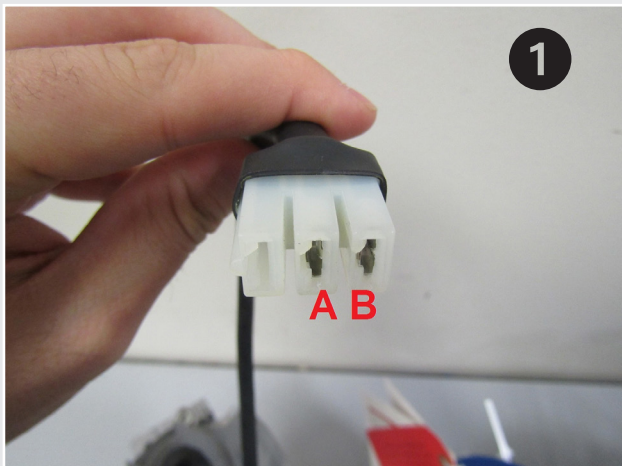

Note that the plug sits offset

# White Rogers Gas Valve Retrofit




## for EZGas Pro Supplement

CLICK ANYWHERE on THIS PAGE to RETURN to WHITE RODGERS CONTROLS & MANUALS at [InspectApedia.com](http://InspectApedia.com)

## WHITE ROGERS GAS VALVE RETROFIT

### Option 2

Strip the Honeywell harness off the existing wire ④. Add compatible flag terminals to the now stripped wire ⑤. Connect to White Rogers valve ⑥.

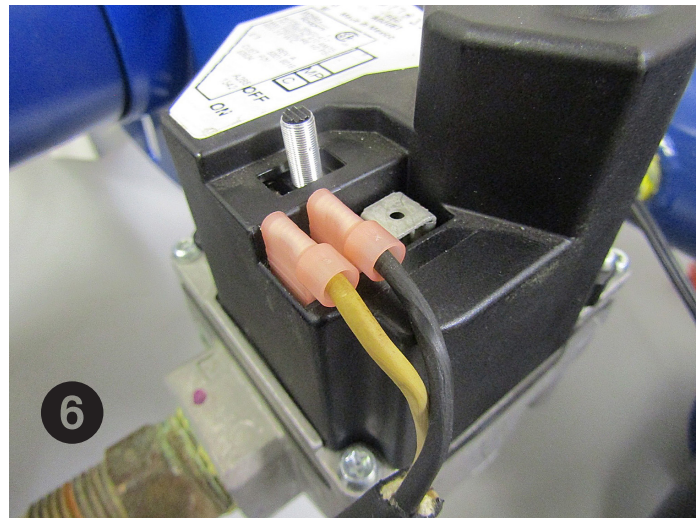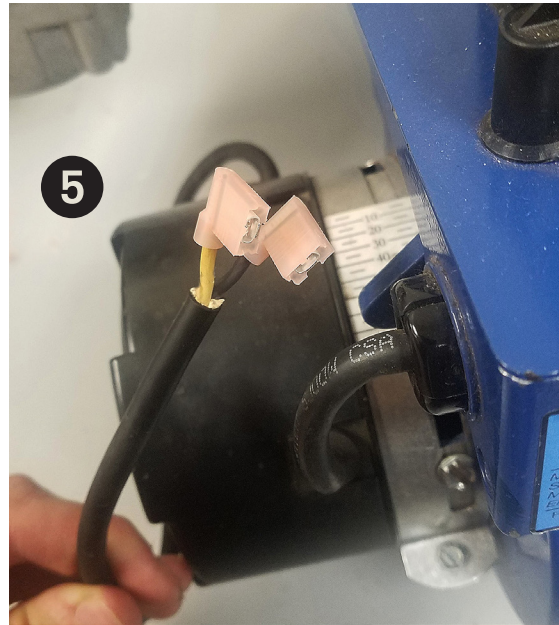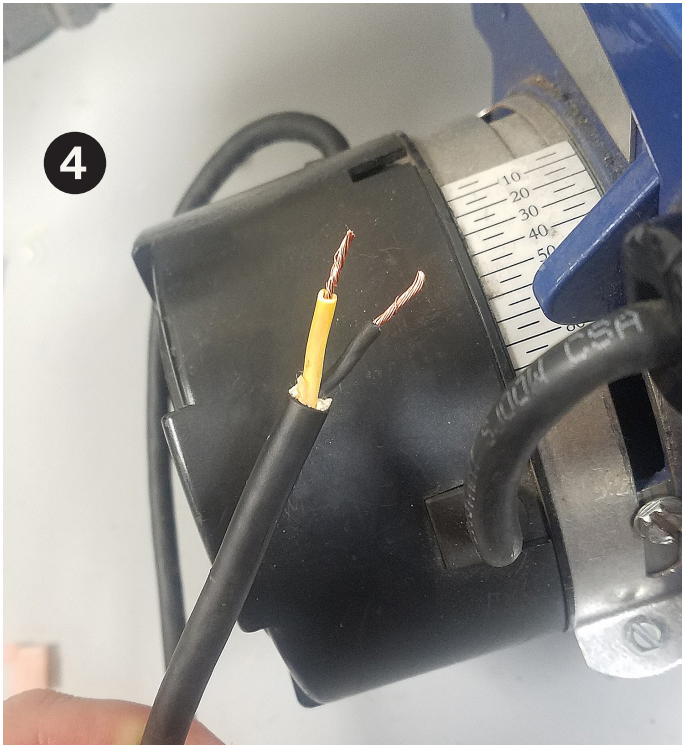

*For additional support, call our Tech Hotline at 800-989-2275*

**Carlin**<sup>®</sup>  
Combustion Technology, Inc.

Tech Hotline: 800-989-2275  
Phone 203-680-9401 Fax 203-680-9403  
126 Bailey Road, North Haven, CT 06473  
[www.carlincombustion.com](http://www.carlincombustion.com)