

Please visit **www.acorneng.com** for most current specifications.

Squat Toilet

Squat Toilet intended to be recessed in the floor.

Fixture is fabricated from one piece of 18 gage, type 304 stainless steel with exposed surfaces polished to a satin finish. Toilet includes a mushroom style rinser with a 3/4" NPS male connection. Toilet waste outlet is 3" O.D. plain end.

GUIDE SPECIFICATION

Provide and install Acorn Penal-Ware Squat Toilet. Fixture shall be fabricated from one piece of 18 gage, type 304 stainless steel with exposed surfaces polished to a satin finish. Shall have a mushroom style rinser with 3/4" NPS male connector. Bottom area shall maintain a minimum water surface. Toilet waste outlet shall be 3" O.D. plain end.

Page # P.1698

Revised: 08/21/18

Get Started
Www.mgispecbuilder.com

Penal-Ware® 1698: Squat Toilet

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

1698 Squat Toilet

SUPPLY (Must Specify) 🗹 - W Wall (Concealed)


FIXTURE MOUNTING AND WASTE (Must Specify) **On-Floor**, Floor Outlet **⊻** -3

FLUSH VALVE GPFs (Must Specify) ✓ -1.5 GPF (5.68 LPF)

FLUSH VALVE OPTIONS (Must Specify) ***REFER TO ACORN DURA-WARE ACCESSORIES FOR FLUSH** VALVE COVER #2802, BOX #2803-1 AND PANEL #2898*

- -EVSFV Master-Trol® Electronic Flush Valve □ -EVSPFV Master-Trol® Electronic Flush Valve w/ Piezo Button
- 🗋 -FV Flush Valve, Mechanical
- -FVBO Flush Valve by Others
- Flush Valve, Hydraulic 🗋 -FVH
- □ -MTPFV Master-Trol® PLUS Electronic Flush Valve
- □ -MTPPFV Master-Trol® PLUS Electronic Flush Valve w/ Piezo
- Button
- -MVCFV Time-Trol® Electronic Flush Valve

Please visit www.acorneng.com for most current specifications.

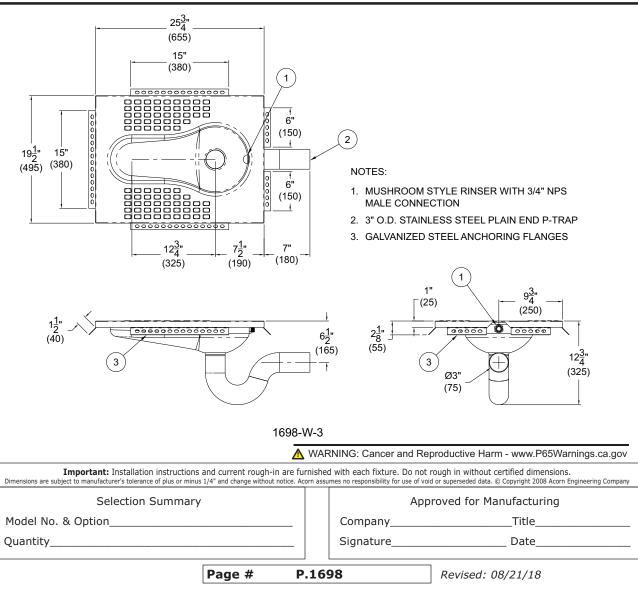

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • Fax: (626) 961-2200 • www.acorneng.com • E-mail: info@acorneng.com

PRODUCT OPTIONS

Transformer, 120VAC to 24VAC (-MVCFV option) 🗋 -TF □ -VAC AcornVac Systems