


CLICK ANYWHERE on THIS PAGE to RETURN to OZONE GENERATOR HAZARD & PROPER USE INFORMATION at [InspectApedia.com](http://InspectApedia.com)



**3500MG COMMERCIAL OZONE GENERATOR**      Model# 048-GM-48251 / 048-GM-48252

**⚠ CAUTION! WARNING:** Do not use this device before reading these instructions. **USER'S MANUAL**

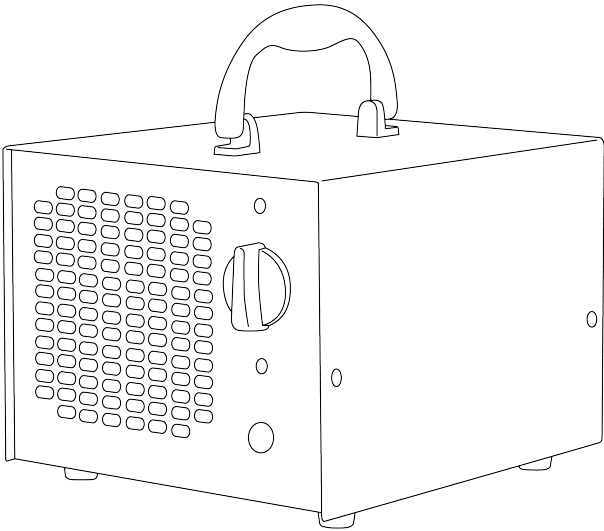

**NOTICE:**

If your package is missing parts or you are having issues with assembly, please call Della directly at (909)-595-5901. The Della customer service team will address any questions or concerns you may have. Have this manual open and ready for reference.

**CUSTOMER SERVICE:**

909-595-5901  
9:00AM - 6:00PM PST (Monday - Friday)

[manufacturer@dellaproductsusa.com](mailto:manufacturer@dellaproductsusa.com)  
[www.dellaproductsusa.com](http://www.dellaproductsusa.com)

# Table of Contents

Warnings & Precautions ----- 03

Technical Specification ----- 04

Users Instruction ----- 04

Care and Maintenance ----- 06

Troubleshooting ----- 06

When using electrical appliances, basic safety precautions should always be followed including the following:

## **READ ALL INSTRUCTIONS BEFORE USE**

1. This product would produce toxic trioxygen (Ozone / O<sub>3</sub>). Only operate this product in unoccupied area.
2. No people, pets, or plates should occupy the area during operation.
3. Exposure to ozone may cause permanent lung damage, eye, nose, or throat irritation, shortness of breath, chest pain, coughing, and worsen asthma symptoms.
4. Make sure the machine is turn off and wait until the ozone finish sterilizing the air and decay into oxygen before re--enter the room.
5. Do not over use the machine, excessive ozone may cause damage to carpet, foam cushions, plastic furnishing, rubber mats and padding, electrical coatings, fabrics and certain art contains dyes and pigment
6. Ozone cannot be used to remove dust or allergic particles.
7. Do not operate this product with a damage cord or plug or after the unit malfunctions, or has been dropped or damaged in an manner.
8. Do not use this product other than intended use.
9. The unit should be connected to the ground to reduce risk of electric shock,
10. Unplug the unit when not in use.

## **SAVE THESE INSTRUCTIONS**

# Specifications

Model Number	048-GM-48251
Dimensions (W x D x H)	6.75" x 9" x 6.25"
Weight	5.5 lb
Power Rating	60 W
Voltage	120 V
Frequency	60 Hz
Ozone Output	3500 mg / hr


# User Instruction

## Grounding

This product must be grounded. If it should malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock.

**⚠ CAUTION! WARNING:** Improper connection of the equipment grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the product is properly grounded.

**⚠ CAUTION! WARNING:** DO NOT modify the plug provided with the product if it does not fit the outlet. Have a proper outlet installed by a qualified electrician.

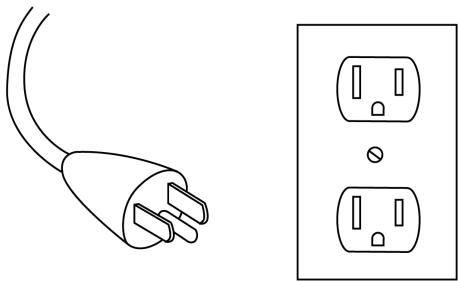

# User Instruction

## Operation Instruction

- Place the product in the area that need air sterilization or odor removal and plug the unit to a socket.
- Turn the timer knob to turn on the unit and enable the count down timer (0 - 120 minutes)  
NOTE: Set the timer according to the room size. Do not overrun the unit to prevent excessive ozone.
- Leave the room and let the unit operate. Make sure no people, pets, or plants occupied the room.
- Wait until the ozone decay into oxygen before re-enter the room

**⚠ CAUTION! WARNING:** If you smell abnormal smell or experience eye, nose, or throat irritation or shortness of breath, chest pain, turn the unit off and leave the room immediately. Wait at least 1 hour before re-enter the room.

### HOLD function

Turning the timer knob to "hold" will allow the unit to operate as long as you like.

**⚠ CAUTION! WARNING:** Only use "hold" function under control. Do not over use the unit. Excessive ozone posts health risk and will cause damage to carpet, plastics, rubber, and metal.

## Application Guide

	30m <sup>2</sup> / 323 sq.ft	50m <sup>2</sup> / 538 sq.ft	100m <sup>2</sup> / 1076 sq.ft
3500 mg / hr	10 min	15 min	30 min

## Care and Maintenance

### Ozone Cell Cleaning

Always turn off the and unplug the unit from power outlet before servicing or cleaning.

Loosen the screw on the side of the unit.

Remove the ozone terminal.

Clean the ozone plates with alkalinity water then rinse with pure water.

Make sure all the components are completely dry before re-installing into the unit.

## Troubleshooting

If you suspect a problem with your unit, check the following:

Make sure the unit is plugged to a grounded socket and turned on.

Ozone plates are clean and dry.

Fuse is installed properly and in working condition. Replace with a new 2 amp, 5 mm x 20 mm fuse if necessary.

Contact customer service if the unit is still not operating.