


Restricted Use Pesticide

For sale to and use only by certified applicators or by persons under their direct supervision and only for those uses covered by the certified applicator's certification.

- 11690-1

# AMERICAN SEAL

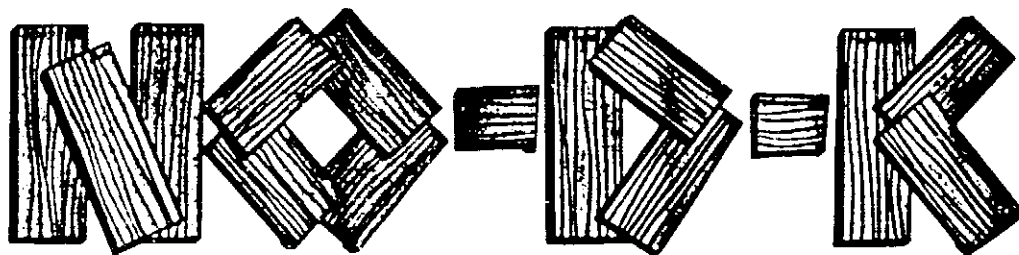

# CREOSOTE OIL Wood Preservative

**ACCEPTED**  
JUN 12 1985  
Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 11690-1

Active Ingredient:  
Creosote Oil, minimum 97%  
Inert Ingredient: Water,  
maximum 3%

EPA Est. No. 10727-PA-1

EPA Reg. No. 11690-1

Keep Out of Reach of Children

(12 pt)

DANGER

(18 pt)

### Statement of Practical Treatment

**For Eyes:** In case of contact with eyes, flush with plenty of water for at least 15 minutes. Call a physician.

**For Skin:** Wash exposed areas of skin with soap and water after handling or using.

**If Swallowed:** Do not induce vomiting. Call a physician immediately.

**Note:** Remove and wash contaminated clothing before reuse or discard in accordance with instructions for pesticide container disposal.

See Side Panel for Additional Precautionary Statements

## NET: 5 Gallons (18.9 Liters)

Manufactured by

AMERICAN SEAL MFG. CO., INC.  
Subsidiary of

MONSEY PRODUCTS CO., INC.

E. Rutherford, NJ 07073  
Kimberton, PA 19442  
Indianapolis, IN 46241

Waterford, NY 12188  
Rock Hill, SC 29730  
Garland, TX 75042

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND  
DOMESTIC ANIMALS

DANGER

(18 pt)

Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Harmful or fatal if swallowed.

Applicators must wear gloves impervious to this wood treatment formulation in all situations where dermal contact is expected. (For example, during the actual application process and when handling freshly treated wood)

Spray applicators must wear protective clothing (including overalls, jackets, gloves and boots) impervious to this wood treatment formulation, and a respirator, head covering and goggles when spraying.

Applicators who apply creosote by other application methods (e.g., brush-on) must wear disposable coveralls or other suitable impermeable protective clothing. Launder non-disposable protective clothing separately from other clothing.

Applicators must not eat, drink, or use tobacco products during those parts of the application process that may expose them to this wood treatment formulation.

Avoid inhaling vapors. If inhalation of vapors cannot be avoided, applicators must wear a properly fitting, well-maintained half-mask canister or cartridge respirator which is MSHA/NIOSH approved for organic vapors and acid gases.

Wash thoroughly after skin contact, and before eating, drinking, use of tobacco products, or using restrooms.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not use this product to treat wood intended to be used where it may come into direct or indirect contact with public drinking water, or drinking water for domestic animals or livestock, except for those uses involving incidental contact such as docks and bridges.

PHYSICAL AND CHEMICAL HAZARDS

This product will burn. Do not use, pour or spill near heat or open flame. This product has a strong odor. Do not use where odor may penetrate to cause any odor problems.

Keep from freezing while in storage. If exposed to temperatures below 40° F., may settle out.

## DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

### STORAGE AND DISPOSAL

(14 pt)

Securely wrap original pesticide container in several layers of newspaper and discard in trash. Do not reuse empty containers. Protective clothing must be changed when it shows signs of contamination. Dispose of worn-out protective clothing and workshoes in any general landfill, in the trash, or in any other manner approved for pesticide disposal.

Wood which has been treated with this product should be disposed of by burial or ordinary trash collection. Do not burn treated wood in an outdoor fire or in stoves or fireplaces because toxic chemicals may be produced as part of the smoke and ashes.

Do not apply where there may be direct contact with domestic animals or livestock, and where there may be contamination of food, feed, or drinking and irrigation water.

Do not apply in interiors. Do not apply to wood intended for use in interiors except for those support structures which are in contact with soil in barns, stables, and similar sites and which are subject to decay or insect infestation, and millwork which has outdoor surfaces (e.g., door frames, windows and patio frames). Interior surfaces of the treated wood should be sealed with two coats of an appropriate sealer.

Do not use this product to treat wood intended to be used for cutting-boards or counter-tops.

Do not use this product to treat wood intended for construction of those portions of beehives which may come into contact with the honey.

Wood to be treated with this product should be cut to size before treatment. If it is necessary to saw or machine wood after treatment, wear goggles to protect the eyes from flying particles and a dust mask to avoid inhaling sawdust from the treated wood. If oily preservatives or sawdust accumulate on clothes, launder before reuse. Wash work clothing separately from other household laundry. Contact with treated surfaces should be avoided even after the preservative has dried.

This product should not be used to treat wood which will be in frequent or prolonged contact with skin, unless the wood will be treated with an effective sealer.

Note to User: As used on this label, the term "respirators" means properly fitting, well-maintained half-mask canisters or cartridge respirators which are MSHA/NIOSH-approved for organic vapors and acid gases. Examples of acceptable materials for protective clothing (e.g., overalls, jackets, head covering, boots, disposable coveralls, and gloves) required during application and handling of creosote are polyvinylacetate (PVA), polyvinylchloride (PVC), neoprene, NBR (Buna-N), and nitrile. Urethane, shellac, latex epoxy enamel and varnish are acceptable sealers for creosote-treated wood.

## **NO-D-K CREOSOTE OIL WOOD PRESERVATIVE**

NO-D-K Creosote Oil adds years of life to lumber. It saves time, labor, and money, repelling wood-destroying termites, insects and vermin. It preserves wood exposed to moisture above or below ground. NO-D-K Creosote Oil is a pure distillate of high temperature Coal Tar processed for reduction of freezing point. It is used on fence posts, sills, joists, and wood in contact with the ground. For best results use two coats on wood which is to be in contact with soil. NO-D-K Creosote Oil is not suitable for application to surfaces that are to be painted. It stains the wood a rich brown color.

### **DIRECTIONS**

Work area should be well ventilated. Wood should be dry and well seasoned. Use Creosote Oil only when temperature is above 60 degrees F. This product will crystallize under 40 degrees F. To liquefy — place cans in a warm area until ready for use. This product should be stored in areas above 45° F at all times.

**Brush Application** — Apply two coats, using good quality brushes. Apply generously around ends, knots, and checked places. Covers approximately 100-150 square feet per gallon, depending upon conditions of surface.

**Spray** — Apply two coats. Covers approximately 100-150 square feet per gallon, first coat, and 150-225 square feet per gallon, second coat.

**Dipping** — Completely immerse timber. Protect oil from sparks and open flames. Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well-seasoned and immersed in the product for a period of 12 to 48 hours to be an effective wood preserver.

#### **General:**

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place away from water supplies.

This product is toxic to fish. This product is toxic to birds. Do not contaminate water by cleaning of equipment, or disposal of wastes.

Creosoted wood should not be used where its odor can contaminate food products. Keep container tightly closed when not in use.