


COLUMBUS ELECTRIC

INSTALLATION & INSTRUCTION SHEET LINE VOLTAGE THERMOSTAT - ET SERIES

DESCRIPTION	SPECIFICATIONS
<p>THE COLUMBUS ELECTRIC WALL LINE VOLTAGE THERMOSTAT IS SUITABLE FOR DIRECT CONNECTION WITH ANY RESISTANCE HEATING ELEMENTS AND UNIT HEATERS.</p> <p>THIS THERMOSTAT HAS A SNAP ACTION SWITCH OPERATED BY A BIMETAL ACTUATOR AND IS AVAILABLE IN SINGLE POLE, DOUBLE POLE WITH POSITIVE OFF, TWO STAGE HEAT, COOLING ONLY AND HEAT OR COOL MODELS. OTHER OPTIONS INCLUDE FACTORY OR FIELD INSTALLED LOCKING KITS FOR TOP AND FOR BOTTOM SETTING AND 6" WIRE LEADS.</p> <p>WARNING</p> <p>IF THIS PRODUCT IS USED TO REPLACE A DEVICE CONTAINING MERCURY, THE PURCHASER OR CONSUMER MUST ENSURE THAT THE MERCURY IS PROPERLY MANAGED TO COMPLY WITH STATE OR FEDERAL REGULATIONS. THE MERCURY MUST NOT BECOME PART OF SOLID WASTE OR WASTE WATER. ADDITIONAL GUIDANCE MAY BE OBTAINED FROM THE MANUFACTURER OF THE PRODUCT BEING REMOVED, OR BY CALLING COLUMBUS ELECTRIC MANUFACTURING COMPANY MATERIALS MANAGER.</p> <p>1-800-251-7828</p>	<p>ELECTRICAL RATING</p> <p>22 AMPS @ 125/277 VAC 3/4 HP @ 125 VAC 1 1/2 HP @ 250/277 VAC</p>
	<p>DIFFERENTIAL</p> <p>HEAT APPROXIMATELY.....2°F COOLING APPROXIMATELY....4°F HEAT ANTICIPATOR MODEL...1/2°F</p>
	<p>TEMPERATURE RANGE (STANDARD MODELS)</p> <p>SETTING RANGE.....50°F TO 90° HEATING OR COOLING.50°F TO 90° ATTIC FAN CONTROL...90°F TO 135°</p>
	<p>APPROVALS</p> <p>U.L. APPROVED C.S.A. CERTIFIED</p>
	<p>DIMENSIONS</p> <p>4 3/4 X 2 3/4 X 2 3/4 H W D</p>

INSTALLATION / OPERATION

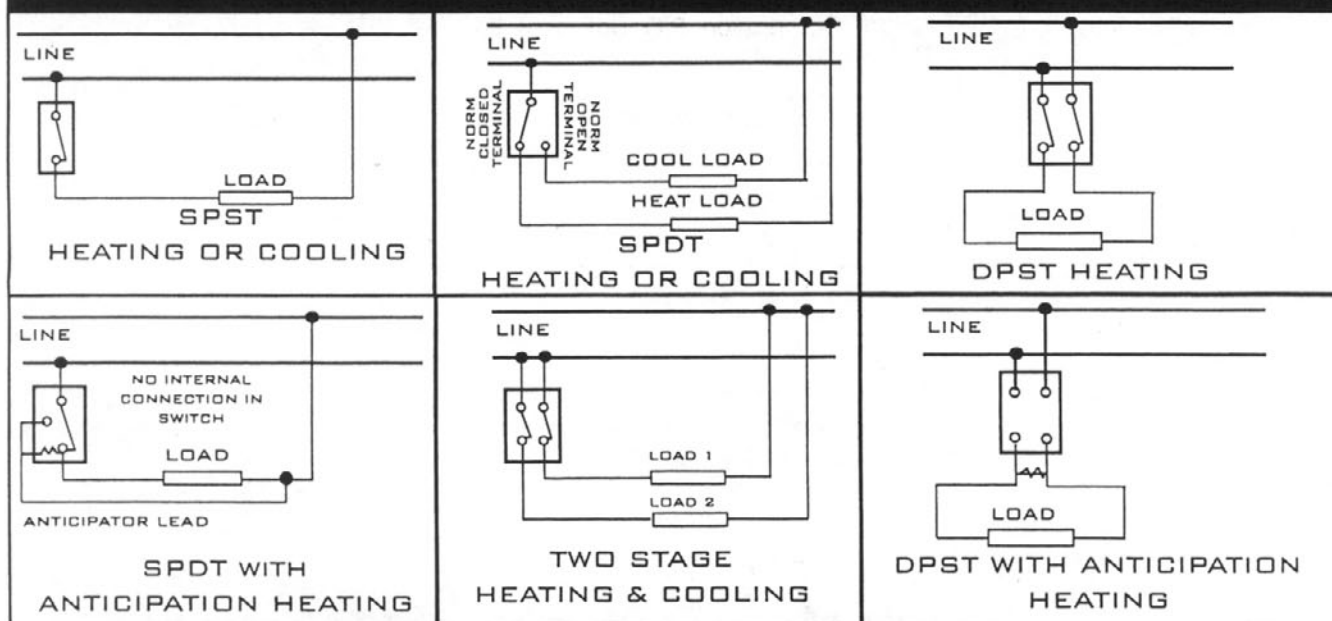

P.O. BOX 4973

JOHNSON CITY, TN. 37602-4973

423-477-4131

8001
REV. G